



amat Matlab toolbox, User's Guide*

version 0.1.3

François Cuvelier[†]

December 19, 2022

Abstract

This object-oriented Matlab toolbox allows to efficiently extend some linear algebra operations on array of matrices (with same size) as matrix product, determinant, factorization, solving, ...

0 Contents

1	Presentation	3
2	Installation	7
3	Notations	9
4	Constructor and generators	10
4.1	Constructor	10
4.2	Particular generators	11
4.3	Random generators	15

* $\text{\LaTeX}$ manual, revision 0.1.3.a, compiled with Matlab 2022a, and toolboxes `fc-amat`[0.1.3], `fc-tools`[0.0.34], `fc-bench`[0.1.3]

[†]LAGA, UMR 7539, CNRS, Université Paris 13 - Sorbonne Paris Cité, Université Paris 8, 99 Avenue J-B Clément, F-93430 Villetaneuse, France, cuvelier@math.univ-paris13.fr.

This work was supported by the ANR project DEDALES under grant ANR-14-CE23-0005.

5	Indexing	53
5.1	Subscripted reference	53
5.2	Subscripted assignment	55
6	Elementary operations	57
6.1	Arithmetic operations	57
6.2	Relational operators	59
6.3	Logical operations	60
7	Elementary mathematical functions	64
7.1	trigonometric functions	65
7.2	Exponents and Logarithms	65
7.3	Complex Arithmetic	66
7.4	Utility methods	66
8	Linear algebra	71
8.1	Linear combination	71
8.2	Matrix product	72
8.3	LU Factorization	76
8.4	Cholesky Factorization	80
8.5	Determinants	85
8.6	Solving particular linear systems	88
8.7	Solving linear systems	92

Initially the **amat** Matlab toolbox was created to be used with finite elements codes for computing volumes and gradients of barycentric coordinates on each mesh elements. The volume of mesh element can be computed with the determinant of a matrix depending on the coordinates of the mesh element vertices. The gradients of the barycentric coordinates of a mesh element are solutions of linear systems. So we want to be able to do efficiently these operations on a very large number (few millions?) of very small matrices with same order (order less than 10?). In Matlab, all these matrices can be stored as a **N-by-m-by-m** 3D-array. Currently, with Matlab from release R2017a (and Octave from version 4.0.3) only element-wise binary operators and functions can be used, as described in:

https://fr.mathworks.com/help/matlab/matlab_prog/compatible-array-sizes-for-basic-operations.html

For example, the sum of a **m-by-n** matrix with all the **N** matrices in a **N-by-m-by-n** 3D-array can be performed as follows:

```
A=rand(m,n); % generate a m-by-n matrix (n>1)
B=randn(N,m,n); % generate a N-by-m-by-n 3D-array
C=reshape(A,[1,m,n])+B; % generate "A+B" 3D-array
```

Unfortunately, simple operation as matrix product between a **m-by-n** matrix and all the **N** matrices in a **N-by-n-by-p** 3D-array or between all the **N** matrices of two 3D-arrays with sizes **N-by-m-by-n** and **N-by-n-by-p** are not implemented yet.

The purpose of this toolbox is to give efficient operators and functions acting on **amat** object (array of **matrices**) to perform operations like sums, matrix product or more complex as determinants computation, factorization, solving, ... by only using Matlab language. One can referred to [1] for more details, tests and benchmarks.

In the first section, the **amat** toolbox is quickly presented. Thereafter, its installation process is described.

1 Presentation

The **amat** object provided in the **amat** toolbox represents an array of matrices of the same order. All the following functions return an **amat** object with **N** matrices whose order is **n × m** or **d × d**:

amat(N,m,n)	constructor with all matrices to zeros
fc_amat.zeros(N,m,n)	same as amat(N,m,n)
fc_amat.ones(N,m,n)	matrices of 1
fc_amat.eye(N,d)	identity matrices
fc_amat.random.randn(N,m,n)	normally distributed random elements
fc_amat.random.randnsym(N,d)	randomized symmetric matrices
fc_amat.random.randnher(N,d)	randomized hermitian matrices
fc_amat.random.randntril(N,d)	randomized lower triangular matrices
fc_amat.random.randntriu(N,d)	randomized upper triangular matrices

...

The complete list of constructor and generating functions is given in section 4.

Let **A** be an **amat** object with **N** matrices whose order are **m × n**. In a

more condensed way we say that `A` is a $N \times m \times m$ `amat` object. One can easily manipulate and edit its content by using indexing. Here is a small part of the offered possibilities. These are detailed in section 5.

`A(k,i,j)` return element `(i,j)` of the `k`-th matrix
`A(k)` return the `k`-th matrix (order $m \times n$)
`A(i,j)` return elements `(i,j)` of all the matrices as an N -by-1-by-1 `amat`
`A(k,i,j)=c` assign `c` scalar value to element `(i,j)` of the `k`-th matrix
`A(i,j)=c` assign `c` value to elements `(i,j)` of all the matrices
`A(k)=B` assign the $m \times n$ matrix `B` to the `k`-th matrix

...

It should be noted that resizing objects can happen when one of the indices is larger than the corresponding dimension. In Listing 1, some examples are provided.

```
A=fc_amat.random.randn(100,3,4); % A: 100-by-3-by-4 amat
B=randn(3,4);
A(10)=B; % B assign to the 10-th matrix
A(20:25)=B; % the matrices 20 to 25 are set to B
A(30:2:36)=0; % the matrices 30,32,34 and 36 are set to 0
A(120)=1; % now A is a 120-by-3-by-4 amat ...
A(1,2)=0; % elements (1,2) of all the matrices are set to 0
A(2:3,3)=1; % elements (2,3) and (3,3) of all the matrices are set to 1
A(4,5)=1; % now A is a 120-by-4-by-5 amat ...
A(5,1,2)=pi; % element (1,2) of the 5-th matrix is set to pi
A(10:15,1,2)=1; % element (1,2) of the matrices 10 to 15 are set to 1
A(130,6,7)=1; % now A is a 130-by-6-by-7 amat ...
```

Listing 1: Assignments with `amat` object

The `amat` class is provided with the usual elementary operations:

- `+`, `-`, `.*`, `./`, `.\`, `^`. (Arithmetic operators)
- `==`, `>=`, `>`, `<=`, `<`, `~=`. (Relational operators)
- `&`, `|`, `~`, `xor`, `all`, `any`. (Logical operators)

These are detailed in section 6. In Listing 2, some examples are provided.

```
A=fc_amat.ones(100,3,4); % A: 100-by-3-by-4 amat
B=fc_amat.random.randn(100,3,4); % B: 100-by-3-by-4 amat
C=randn(3,4);
D1=-A+1;
D2=B.^2-A/2;
D3=-2*A.*C;
```

Listing 2: Element by elements operations with `amat` object

Matricial products can also be done between `amat` objects or between an `amat` object and a matrix if their dimensions are compatible. For this operation the operator `*` can be used. In Listing 3, some examples are provided.

Listing 3: : matricial products with `amat` object

```
A=fc_amat.ones(100,3,4);% 100-by-3-by-4
info(A)
B=fc_amat.random.randn(100,4,2);% 100-by-4-by-2
info(B)
C=randn(4,5);
D1=A*B;% 100-by-3-by-2
info(D1)
D2=A*C;% 100-by-3-by-5
info(D2)
```

Output

```
A is a 100x3x4 amat[double] object
B is a 100x4x2 amat[double] object
D1 is a 100x3x2 amat[double] object
D2 is a 100x3x5 amat[double] object
```

Some usual mathematical functions as `cos`, `sin`, `exp`, `sqrt`, `abs`, `max`, ... are available for `amat` objects. One can refered to section 7 for more details.

Other operations such as determinants computation (`det` method), LU factorization with partial pivot (`lu` method), Cholesky factorization (`chol` method), solving linear systems (`mldivide` method or `\` operator) are also implemented for `amat` objects and described in section 8. In Listing 4, some examples using these functions are given.

Thereafter in Listing 5, the benchmark function `fc_amat.benchs.mldivide` is used to obtain cputimes of the `X=mldivide(A,b)` command where `A` and `b` are respectively $N \times 3 \times 3$ and $N \times 3 \times 4$ `amat` objects. The provided error is computed by taking the maximum of the infinity norms of all the matrices in the error `amat` object `E=A*X-b` obtained by `max(norm(E))`.

Finally, in Table 1 benchmark functions `fc_amat.benchs.mtimes`, `fc_amat.benchs.lu`, `fc_amat.benchs.chol` and `fc_amat.benchs.mldivide` are respectively used to get cputimes of the `X=mtimes(A,B)`, `[L,U,P]=lu(A)`, `R=chol(A)` and `X=mldivide(A,b)` where `A` and `B` are $N \times 4 \times 4$ `amat` objects, and `b` is a $N \times 4 \times 1$ `amat` object.

Listing 4: : Linear algebra with `amat` object

```
% Generate 100-by-4-by-4 amat object symmetric positive definite ...
% matrices :
A=fc_amat.random.randnsympd(100,4);
% determinants computation :
D=det(A); % D: 100-by-1-by-1 amat object , det(A(k))=D(k) , for all k
% LU factorizations :
[L,U,P]=lu(A);
E1=abs(L*U-P*A);
fprintf('max of E1 elements: %.6e\n',max(E1(:)))
% Cholesky factorizations :
R=chol(A);
E2=abs(R'*R-A);
fprintf('max of E2 elements: %.6e\n',max(E2(:)))
% Solving linear systems :
b=ones(4,1); % RHS
X=A\b; % X: 100-by-4-by-1, X(k)=A(k)\b, for all k
E3=abs(A*X-b);
fprintf('max of E3 elements: %.6e\n',max(E3(:)))
B=fc_amat.random.randn(100,4,1); % RHS
Y=A*B; % Y: 100-by-4-by-1, Y(k)=A(k)\B(k), for all k
E4=abs(A*Y-B);
fprintf('max of E4 elements: %.6e\n',max(E4(:)))
whos
```

Output

```
max of E1 elements: 3.552714e-15
max of E2 elements: 7.105427e-15
max of E3 elements: 7.105427e-15
max of E4 elements: 2.153833e-14
```

Name	Size	Bytes	Class	Attributes
A	100x4x4	12832	amat	
B	100x4x1	3232	amat	
D	100x1x1	832	amat	
E1	100x4x4	12832	amat	
E2	100x4x4	12832	amat	
E3	100x4x1	3232	amat	
E4	100x4x1	3232	amat	
L	100x4x4	12832	amat	
P	100x4x4	12832	amat	
R	100x4x4	12832	amat	
SaveOptions	1x6	673	cell	
U	100x4x4	12832	amat	
X	100x4x1	3232	amat	
Y	100x4x1	3232	amat	
b	4x1	32	double	
fcexrunoutputfilename	1x20	40	char	

Listing 5: : Computational times of the `X=mldivide(A,b)` command where `A` and `b` are respectively $N \times 3 \times 3$ and $N \times 3 \times 4$ `amat` objects by using the benchmark function `fc_amat.benchs.mldivide`

```
LN=10^5*[2:2:10];
fc_amat.benchs.mldivide(LN,'d',3,'n',4,'nbruns',5)
```

Output

```
#-----
# computer: ryzen
# system: Ubuntu 22.04.1 LTS (x86_64)
# processor: AMD Ryzen 5 3500U with Radeon Vega Mobile Gfx
# (1 procs/4 cores by proc/2 threads by core)
# RAM: 13.6 Go
# software: Matlab
# release: 2022a
# MaxThreads: 4
#-----
# 1st parameter is :
# -> amat[double] with (N,m,n)=(N,3,3)
# containing strictly diagonally dominant matrices
# 2nd parameter is :
# -> amat[double] with (N,nr,nc)=(200000,3,4), size=[200000 3 4]
# Error function: @(X)max(norm(A*X-B))
#-----
#date:2022/12/19 17:31:05
#nbruns:5
#numpy: i4 f4 f4
#format: %d %.3f %.3e
#labels: N mldivide(s) Error[0]
200000 0.274 2.801e-14
400000 0.684 4.810e-14
600000 1.006 1.024e-13
800000 1.366 1.415e-13
1000000 1.434 1.165e-13
```

	<code>N</code>	<code>mtimes</code> (s)	<code>chol</code> (s)	<code>lu</code> (s)	<code>mldivide</code> (s)
	200 000	0.124(s)	0.018(s)	0.306(s)	0.298(s)
	400 000	0.296(s)	0.044(s)	0.589(s)	0.654(s)
	600 000	0.447(s)	0.071(s)	0.809(s)	1.069(s)
	800 000	0.588(s)	0.100(s)	1.182(s)	1.465(s)
	1 000 000	0.697(s)	0.122(s)	1.417(s)	1.808(s)
	5 000 000	5.253(s)	0.746(s)	8.830(s)	12.921(s)

Table 1: Computational times in seconds of `mtimes(A,B)` (i.e. `A*B`), `lu(A)`, `chol(A)` and `mldivide(A,b)` (i.e. `A\b`) with `A` and `B` $N \times 4 \times 4$ `amat` objects and `b` $N \times 4 \times 1$ `amat` object.

2 Installation

This toolbox was only tested on Ubuntu 22.04.1 with Matlab R2022a.

2.0.1 Automatic installation, all in one (recommended)

For this method, one just has to get/download the install file

`mfc_amat_install.m`

or get it on the dedicated web page. Thereafter, one runs it under Matlab. This script downloads, extracts and configures the `fc-amat` and the required toolboxes (`fc-tools` and `fc-bench`) in the current directory.

For example, to install this toolbox in `~/Matlab/toolboxes` directory, one has to copy the file `mfc_amat_install.m` in the `~/Matlab/toolboxes` directory by using previous link. For example, in a Linux terminal, we can do:

```
cd ~/Matlab/toolboxes
HTTP=http://www.math.univ-paris13.fr/~cuvelier/software/codes/Matlab
wget $HTTP/fc-amat/0.1.3/mfc_amat_install.m
```

Then in a Matlab terminal run the following commands

```
>> cd ~/Matlab/toolboxes
>> mfc_amat_install()
```

The optional `'dir'` option can be used to specify installation directory:

```
mfc_amat_install('dir',dirname)
```

where `dirname` is the installation directory (string).

There is the output of the `mfc_amat_install()` command on a Linux computer:

```
Parts of the <fc-amat> Matlab toolbox.
Copyright (C) 2018-2022 F. Cuvelier

1- Downloading and extracting the toolboxes
2- Setting the <fc-amat> toolbox
Write in ~/Matlab/toolboxes/fc-amat-full/fc_amat-0.1.3/configure_loc.m ...
...
3- Using toolboxes :
->          fc-tools : 0.0.33
->          fc-bench : 0.1.3
*** Using instructions
To use the <fc-amat> toolbox:
addpath('~/Matlab/toolboxes/fc-amat-full/fc_amat-0.1.3')
fc_amat.init()

See ~/Matlab/toolboxes/mfc_amat_set.m
```

The complete toolbox (i.e. with all the other needed toolboxes) is stored in the directory `~/Matlab/toolboxes/fc-amat-full` and, for each Matlab session, one have to set the toolbox by:

```
>> addpath('~/Matlab/toolboxes/fc-amat-full/fc-amat-0.1.3')
>> fc_amat.init()
```

If it's the first time the `fc_amat.init()` function is used, then its output is

```
Try to use default parameters!
Use fc_tools.configure to configure.
Write in ...
~/Matlab/toolboxes/fc-amat-full/fc_tools-0.0.34/configure_loc.m ...
Try to use default parameters!
Use fc_bench.configure to configure.
Write in ...
~/Matlab/toolboxes/fc-amat-full/fc_bench-0.1.3/configure_loc.m ...
Using fc_amat[0.1.3] with fc_tools[0.0.34], fc_bench[0.1.3].
```

Otherwise, the output of the `fc_amat.init()` function is

```
Using fc_amat [0.1.3] with fc_tools [0.0.34], fc_bench [0.1.3].
```

For **uninstalling**, one just has to delete directory

~/Matlab/toolboxes/fc-amat-full

2.0.2 Manual installation

- Download one of **full archives** which contains all the needed toolboxes (*fc-amat*, *fc-tools* and *fc-bench*).
- Extract the archive in a folder.
- Set Matlab path by adding path of the needed toolboxes.

For example under Linux, to install this toolbox in ~/Matlab/toolboxes directory, one can download fc-amat-0.1.3-full.tar.gz and extract it in the ~/Matlab/toolboxes directory:

```
HTTP=http://www.math.univ-paris13.fr/~cuvelier/software/codes/Matlab
wget $HTTP/fc-amat/0.1.3/fc-amat-0.1.3-full.tar.gz
tar xzf fc-amat-0.1.3-full.tar.gz -C ~/Matlab/packages
```

For each Matlab session, one has to set the toolbox by adding path of all packages:

```
>> addpath('~/Matlab/toolboxes/fc_amat-0.1.3')
>> addpath('~/Matlab/toolboxes/fc_tools-0.0.34')
>> addpath('~/Matlab/toolboxes/fc_bench-0.1.3')
```

3 Notations

Some typographic conventions are used in the following:

- $\mathbb{Z}$, $\mathbb{N}$, $\mathbb{R}$, $\mathbb{C}$ are respectively the set of integers, positive integers, reals and complex numbers. $\mathbb{K}$ is either $\mathbb{R}$ or $\mathbb{C}$.
- All vectors or 1D-arrays are represented in bold: $\mathbf{v} \in \mathbb{R}^n$ or $\mathbf{X}$ a 1D-array. The first alphabetic characters are **aAbBcC**...
- All matrices or 2D-arrays are represented with the blackboard font as: $\mathbb{M} \in \mathcal{M}_{m,n}(\mathbb{K})$ or $\mathbb{b}$ a m -by- n 2D-array. The first alphabetic characters are **aAbBcC**...
- All arrays of matrices or 3D-arrays or **amat** objects are represented with the bold blackboard font as: $\mathbf{M} \in (\mathcal{M}_{m,n}(\mathbb{K}))^N$ or $\mathbf{b}$ a N -by- m -by- n 3D-array. The first alphabetic characters are **aAbBcC**...

We now introduce some notations. Let $\mathbf{A} = (\mathbb{A}_1, \dots, \mathbb{A}_N) \in (\mathcal{M}_{m,n}(\mathbb{K}))^N$ be a set of m -by- n matrices. We identify $\mathbf{A}$ as a N -by- m -by- n **amat** object and we said that the **amat** object $\mathbf{A}$ is in $(\mathcal{M}_{m,n}(\mathbb{K}))^N$. The $\mathbf{k}$ -th matrix of $\mathbf{A}$ is

$A(k)$ and the (i,j) entry of the k -th matrix of A is $A(k,i,j)$.

Thereafter, we said that an `amat` object $A \in (\mathcal{M}_{m,n}(\mathbb{K}))^N$ has a property of matrix if all its matrices have this property. For example, A is a symmetrical `amat` object if all its matrices are symmetrical.

4 Constructor and generators

We give properties of the `amat` class :



Properties of `amat` class

<code>nr</code>	:	number of rows
<code>nc</code>	:	number of columns
<code>N</code>	:	number of matrices (<code>nr</code> -by- <code>nc</code>)
<code>values</code>	:	<code>N</code> -by- <code>nr</code> -by- <code>nc</code> array which contains all the matrices

4.1 Constructor

Syntaxe

```
X=amat(N,nr,nc)
X=amat(T)
X=amat(N,A)
X=amat(...,classname)
```

Description

`X=amat(N,n,m)` returns a `N`-by-`n`-by-`m` `amat` object where all its elements are set to 0.

`X=amat(T)` when `T` is a `N`-by-`n`-by-`m` array, returns the `N`-by-`n`-by-`m` `amat` object set to `T`.

When `T` is a `N`-by-`n`-by-`m` `amat` object, returns a `N`-by-`n`-by-`m` zero `amat` object.

`X=amat(N,A)` with `A` a `n`-by-`m` matrix, return the `N`-by-`n`-by-`m` `amat` object where all its matrices are set to the matrix `A`.

`X=amat(...,classname)` returns an `amat` object with values of class `classname`.

In Listing 6, some examples are provided.

Listing 6: : `amat` constructors

```

X=amat(100,3,4);           % X: 100-by-3-by-4 amat
info(X)
W=amat(X);                 % W: 100-by-3-by-4 amat
info(W)
T=randn(200,2,3);          % T: 200-by-2-by-3 array
Y=amat(T);                 % Y: 200-by-2-by-3 amat
info(Y)
A=randi(10,[2,4],'int32'); % A: 2-by-4 int32 matrix
Z=amat(30,A,'int64');      % Z: 30-by-2-by-4 int64 amat
disp('Print Z amat object:')
disp(Z)

```

Output

```

X is a 100x3x4 amat[double] object
W is a 100x3x4 amat[double] object
Y is a 200x2x3 amat[double] object
Print Z amat object :
Z is a 30x2x4 amat[int64] object
Z(1)=
     9    10     1     8
     1     4     4     8

Z(2)=
     9    10     1     8
     1     4     4     8

...

Z(29)=
     9    10     1     8
     1     4     4     8

Z(30)=
     9    10     1     8
     1     4     4     8

```

4.2 Particular generators

There is the list of functions which generate some particular `amat` objects:

- `fc_amat.zeros` , generates an zero `amat` object,
- `fc_amat.ones` , generates an `amat` object of one's,
- `fc_amat.eye` , generates an `amat` object of identity matrices.

4.2.1 `fc_amat.zeros` function

Syntaxe

```

X=fc_amat.zeros(N,m,n)
X=fc_amat.zeros([N,m,n])
X=fc_amat.zeros([N,d])
X=fc_amat.zeros(...,classname)

```

Description

`X=fc_amat.zeros(N,m,n)` return an `N-by-m-by-n` zero `amat` object.

`X=fc_amat.zeros([N,m,n])` same as `X=fc_amat.zeros(N,m,n)`

`X=fc_amat.zeros(N,d)` same as `X=fc_amat.zeros(N,d,d)`

`X=fc_amat.zeros(...,classname)` returns an `amat` object with values of class `classname`

In Listing 7, some examples are provided.

Listing 7: : examples of `fc_amat.zeros` function usage

```
X=fc_amat.zeros(100,2,4);           % X: 100-by-2-by-4 amat
Y=fc_amat.zeros(200,3);           % Y: 100-by-3-by-3 amat
Z=fc_amat.zeros([50,2,3], 'single'); % Y: 100-by-2-by-3 single amat
disp('List current variables:')
whos
disp('Print Z amat object:')
Z
```

Output

```
List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions       1x6             673   cell
X                 100x2x4         6432  amat
Y                 200x3x3        14432  amat
Z                 50x2x3         1232  amat
fcexrunoutputfilename 1x13           26   char

Print Z amat object :

Z =

Z is a 50x2x3 amat[single] object
Z(1)=
    0    0    0
    0    0    0

Z(2)=
    0    0    0
    0    0    0

...

Z(49)=
    0    0    0
    0    0    0

Z(50)=
    0    0    0
    0    0    0
```

4.2.2 `fc_amat.ones` function

Syntaxe

```
X=fc_amat.ones(N,m,n)
X=fc_amat.ones([N,m,n])
X=fc_amat.ones(N,d)
X=fc_amat.ones(...,classname)
```

Description

`X=fc_amat.ones(N,m,n)` return a `N-by-m-by-n` `amat` object of ones.

`X=fc_amat.ones([N,m,n])` same as `X=fc_amat.ones(N,m,n)`

`X=fc_amat.ones(N,d)` same as `X=fc_amat.ones(N,d,d)`

`X=fc_amat.ones(...,classname)` returns an `amat` object with values of class `classname`

In Listing 7, some examples are provided.

Listing 8: : examples of `fc_amat.ones` function usage

```
X=fc_amat.ones(100,2,4);           % X: 100-by-2-by-4 amat
Y=fc_amat.ones(200,3);             % Y: 200-by-3-by-3 amat
Z=fc_amat.ones([50,2,3],'single'); % Y: 50-by-2-by-3 single amat
disp('List current variables: ')
whos
disp('Print Z amat object: ')
Z
```

Output

```
List current variables :
Name          Size          Bytes Class  Attributes

SaveOptions    1x6             673   cell
X              100x2x4         6432  amat
Y              200x3x3        14432  amat
Z              50x2x3         1232  amat
fcexrunoutputfilename 1x12         24   char

Print Z amat object :

Z =

Z is a 50x2x3 amat[single] object
Z(1)=
     1     1     1
     1     1     1

Z(2)=
     1     1     1
     1     1     1

...

Z(49)=
     1     1     1
     1     1     1

Z(50)=
     1     1     1
     1     1     1
```

4.2.3 `fc_amat.eye` function

Syntaxe

```
X=fc_amat.eye(N,d)
X=fc_amat.eye(N,m,n)
X=fc_amat.eye([N,m,n])
```

```
X=fc_amat.eye(...,classname)
```

Description

`X=fc_amat.eye(N,d)` return a **N-by-d-by-d** **amat** object whose all its matrices are the **d-by-d** identity matrix.

`X=fc_amat.eye(N,m,n)` return a **N-by-m-by-n** **amat** object whose all its matrices are the **m-by-n** matrix with one's on the diagonal and zeros elsewhere.

`X=fc_amat.eye([N,m,n])` same as `X=fc_amat.eye(N,m,n)`

`X=fc_amat.eye(...,classname)` returns an **amat** object with values of class **classname**

In Listing 7, some examples are provided.

Listing 9: : examples of **fc_amat.eye** function usage

```
X=fc_amat.eye(100,2,4);           % X: 100-by-2-by-4 amat
Y=fc_amat.eye(200,3,'int32');     % Y: 200-by-3-by-3 int32 amat
Z=fc_amat.eye([50,2,3]);         % Z: 50-by-2-by-3 amat
disp('List current variables: ')
whos
disp('Print Y amat object: ')
Y
```

Output

```
List current variables :
Name              Size              Bytes Class      Attributes
SaveOptions       1x6                673 cell
X                 100x2x4            6432 amat
Y                 200x3x3            7232 amat
Z                 50x2x3             2432 amat
fcexrunoutputfilename 1x11              22 char

Print Y amat object :

Y =

Y is a 200x3x3 amat[int32] object
Y(1)=
    1    0    0
    0    1    0
    0    0    1

Y(2)=
    1    0    0
    0    1    0
    0    0    1

...

Y(199)=
    1    0    0
    0    1    0
    0    0    1

Y(200)=
    1    0    0
    0    1    0
    0    0    1
```

4.3 Random generators

There is the list of functions which generate some `amat` objects with random elements. They all belong to the namespace `fc_amat.random`:

- `rand`, `randn`, `randi` random elements,
- `randsym`, `randnsym`, `randisym` random **symmetric** matrices,
- `randsym`, `randnsym`, `randisym` random **Hermitian** matrices,
- `randdiag`, `randndiag`, `randidiag` random **diagonal** matrices,
- `randtril`, `randntril`, `randitril` random **lower triangular** matrices,
- `randtriu`, `randntriu`, `randitriu` random **upper triangular** matrices,
- `randsdd`, `randnsdd`, `randisdd` random **strictly diagonally dominant** matrices,
- `randsympd`, `randnsympd`, `randisympd` random **symmetric positive definite** matrices,
- `randherpd`, `randnherpd`, `randiherpd` random **Hermitian positive definite** matrices.

4.3.1 `fc_amat.random.rand` function

The `fc_amat.random.rand` function return an `amat` object with random elements uniformly distributed on the interval $]0, 1[$.

Syntaxe

```
X=fc_amat.random.rand(N,m,n)
X=fc_amat.random.rand([N,m,n])
X=fc_amat.random.rand(N,d)
X=fc_amat.random.rand(...,classname)
```

Description

`X=fc_amat.random.rand(N,m,n)` return a **N-by-m-by-n** `amat` object with random elements uniformly distributed on the interval $]0, 1[$.

`X=fc_amat.random.rand([N,m,n])` same as `X=fc_amat.random.rand(N,m,n)`

`X=fc_amat.random.rand(N,d)` same as `X=fc_amat.random.rand(N,d,d)`

`X=fc_amat.random.rand(...,classname)` returns an `amat` object with values of class `classname`. `classname` could be `'single'` or `'double'` (default).

In Listing 10, some examples are provided.

Listing 10: : examples of `fc_amat.random.rand` function usage

```

X=fc_amat.random.rand(100,2,4);
Y=fc_amat.random.rand(200,3);
Z=fc_amat.random.rand([50,2,3], 'single');
amat
disp('List current variables:')
whos
disp('Print Z amat object:')
Z

```

Output

```

List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions       1x6             673   cell
X                 100x2x4         6432  amat
Y                 200x3x3        14432  amat
Z                  50x2x3         1232  amat
fcexrunoutputfilename 1x12           24   char

Print Z amat object :

Z =

Z is a 50x2x3 amat[single] object
Z(1)=
    0.0499    0.4716    0.4880
    0.6976    0.4794    0.9926

Z(2)=
    0.5459    0.5430    0.4978
    0.2037    0.8985    0.4558

...

Z(49)=
    0.1709    0.2399    0.9820
    0.0149    0.7151    0.8497

Z(50)=
    0.3993    0.5977    0.5136
    0.1567    0.5048    0.2834

```

4.3.2 `fc_amat.random.randn` function

The `fc_amat.random.randn` function return an `amat` object with normally distributed random elements having zero mean and variance one.

Syntaxe

```

X=fc_amat.random.randn(N,m,n)
X=fc_amat.random.randn([N,m,n])
X=fc_amat.random.randn(N,d)
X=fc_amat.random.randn(...,classname)

```

Description

```
X=fc_amat.random.randn(N,m,n)
```

returns a **N-by-m-by-n** **amat** object with normally distributed random elements having zero mean and variance one.

```
X=fc_amat.random.randn([N,m,n])
```

same as `X=fc_amat.random.randn(N,m,n)`

```
X=fc_amat.random.randn(N,d)
```

same as `X=fc_amat.random.randn(N,d,d)`

```
X=fc_amat.random.randn(...,classname)
```

returns an **amat** object with values of class **classname**. **classname** could be **'single'** or **'double'** (default).

In Listing 10, some examples are provided.

Listing 11: : examples of `fc_amat.random.randn` function usage

```
X=fc_amat.random.randn(100,2,4);           % X: 100-by-2-by-4 amat
Y=fc_amat.random.randn(200,3);             % Y: 200-by-3-by-3 amat
Z=fc_amat.random.randn([50,2,3],'single'); % Y: 50-by-2-by-3 single ...
amat
disp('List current variables: ')
whos
disp('Print Z amat object: ')
Z
```

Output

```
List current variables :
Name          Size          Bytes Class  Attributes
SaveOptions    1x6             673   cell
X              100x2x4         6432  amat
Y              200x3x3        14432  amat
Z              50x2x3         1232  amat
fcexrunoutputfilename 1x13          26   char

Print Z amat object :

Z =

Z is a 50x2x3 amat[single] object
Z(1)=
    1.1754    0.1834   -0.3981
    0.2753   -0.0281    0.9842

Z(2)=
    0.3977   -0.2597    0.2564
    0.3533    0.1404    0.9931

...

Z(49)=
    0.0987   -0.2084   -0.4723
   -0.2993    0.3512    0.0661

Z(50)=
    1.6843    0.0247    0.2760
   -1.7210   -0.8723   -0.6379
```

4.3.3 `fc_amat.random.randi` function

The function `fc_amat.random.randi` return an `amat` object whose elements are random integers.

Syntaxe

```
X=fc_amat.random.randi(Imax,N,m,n)
X=fc_amat.random.randi(Imax,[N,m,n])
X=fc_amat.random.randi(Imax,N,d)
X=fc_amat.random.randi([Imin,Imax],...)
X=fc_amat.random.randi(...,classname)
```

Description

```
X=fc_amat.random.randi(Imax,N,m,n)
```

returns a `N`-by-`m`-by-`n` `amat` object containing pseudorandom integer values drawn from the discrete uniform distribution on `1:Imax`.

```
X=fc_amat.random.randi(Imax,[N,m,n])
```

same as `X=fc_amat.random.randi(Imax,N,m,n)`

```
X=fc_amat.random.randi(Imax,N,d)
```

same as `X=fc_amat.random.randi(Imax,N,d,d)`

```
X=fc_amat.random.randi([Imin,Imax],...)
```

returns an `amat` object containing integer values drawn from the discrete uniform distribution on `Imin:Imax`.

```
X=fc_amat.random.randi(...,classname)
```

returns an `amat` object with values of class `classname`. Accepted `classname` strings are those of the `randi` Matlab function. Default is `'double'`.

In Listing 10, some examples are provided.

Listing 12: : examples of `fc_amat.random.randi` function usage

```
X=fc_amat.random.randi(10,100,2,4); % X: 100-by-2-by-4 amat
Y=fc_amat.random.randi(15,200,3); % Y: 200-by-3-by-3 amat
Z=fc_amat.random.randi([-5,5],[50,2,3],'int32'); % Z: 50-by-2-by-3 ...
    int32 amat
disp('List current variables:')
whos
disp('Print Z amat object:')
Z
```

Output

```
List current variables:
Name          Size          Bytes Class  Attributes

SaveOptions      1x6             673  cell
X                100x2x4         6432  amat
Y                200x3x3        14432  amat
Z                50x2x3         1232  amat
fcexrunoutputfilename 1x13           26  char

Print Z amat object:
Z =

Z is a 50x2x3 amat[int32] object
Z(1)=
    -5     0     0
     2     0     5

Z(2)=
     1     0     0
    -3     4     0

...

Z(49)=
    -4    -3     5
    -5     2     4

Z(50)=
    -1     1     0
    -4     0    -2
```

4.3.4 `fc_amat.random.randsym` function

The `fc_amat.random.randsym` function return an `amat` object whose matrices are symmetric with random elements uniformly distributed on the interval $]0, 1[$.

Syntaxe

```
X=fc_amat.random.randsym(N,d)
X=fc_amat.random.randsym(N,d,'class',value)
```

Description

```
X=fc_amat.random.randsym(N,d)
```

return a `N`-by-`d`-by-`d` `amat` object whose matrices are symmetric with random elements uniformly distributed on the interval $]0, 1[$.

```
X=fc_amat.random.randsym(N,d,'class',classname)
```

returns an `amat` object with values of class `classname`. `classname` could be `'single'` or `'double'` (default).

In Listing 13, some examples are provided.

Listing 13: : examples of `fc_amat.random.randnsym` function usage

```

X=fc_amat.random.randnsym(100,3);           % X: 100-by-3-by-3 amat
Y=fc_amat.random.randnsym(50,2,'class','single'); % Y: 50-by-2-by-2 ...
      single amat
disp('List current variables:')
whos
disp('Print Y amat object:')
Y

```

Output

```

List current variables :
Name              Size              Bytes Class  Attributes
SaveOptions        1x6                673  cell
X                  100x3x3            7232  amat
Y                  50x2x2             832  amat
fcexrunoutputfilename 1x15              30  char

Print Y amat object :

Y =

Y is a 50x2x2 amat[single] object
Y(1)=
    0.8507    0.1465
    0.1465    0.5590

Y(2)=
    0.5606    0.1891
    0.1891    0.8541

...

Y(49)=
    0.1231    0.0252
    0.0252    0.0934

Y(50)=
    0.2055    0.8422
    0.8422    0.3074

```

4.3.5 `fc_amat.random.randnsym` function

The `fc_amat.random.randnsym` function return an `amat` object whose matrices are symmetric with normally distributed random elements having zero mean and variance one.

Syntaxe

```

X=fc_amat.random.randnsym(N,d)
X=fc_amat.random.randnsym(N,d,'class',value)

```

Description

```
X=fc_amat.random.randnsym(N,d)
```

return a `N`-by-`d`-by-`d` `amat` object whose matrices are symmetric normally distributed random elements having zero mean and variance one.

```
X=fc_amat.random.randnsym(N,d,'class',classname)
```

returns an `amat` object with values of class `classname`. `classname` could be `'single'` or `'double'` (default).

In Listing 14, some examples are provided.

Listing 14: : examples of `fc_amat.random.randnsym` function usage

```
X=fc_amat.random.randnsym(100,3);           % X: 100-by-3-by-3 ...
amat
Y=fc_amat.random.randnsym(50,2,'class','single'); % Y: 50-by-2-by-2 ...
single amat
disp('List current variables:')
whos
disp('Print Y amat object:')
Y
```

Output

```
List current variables :
Name              Size      Bytes Class  Attributes

SaveOptions       1x6         673   cell
X                 100x3x3     7232  amat
Y                 50x2x2      832   amat
fcexrunoutputfilename 1x16        32   char

Print Y amat object :

Y =

Y is a 50x2x2 amat[single] object
Y(1)=
    0.4759   -1.4827
   -1.4827    1.9085

Y(2)=
    1.4122   -0.0438
   -0.0438    0.1222

...

Y(49)=
    0.0931    0.5037
    0.5037   -0.7006

Y(50)=
   -0.3782   -0.8927
   -0.8927   -1.6305
```

4.3.6 `fc_amat.random.randisym` function

The `fc_amat.random.randisym` function return an `amat` object whose matrices are symmetric with random integers values.

Syntaxe

```
X=fc_amat.random.randisym(Imax,N,d)
X=fc_amat.random.randisym([Imin,Imax],...)
X=fc_amat.random.randisym(...,'class',classname)
```

Description

```
X=fc_amat.random.randisym(Imax,N,d)
```

returns a **N-by-d-by-d amat** object whose matrices are symmetric pseudo random integer values drawn from the discrete uniform distribution on **1:Imax**

```
X=fc_amat.random.randisym([Imin,Imax], ...)
```

pseudo random integer values are drawn from the discrete uniform distribution on **Imin:Imax**

```
X=fc_amat.random.randisym(...,'class',classname)
```

returns an **amat** object with values of class **classname**. Accepted **classname** strings are those of the **randi** Matlab function. Default is **'double'**.

In Listing 15, some examples are provided.

Listing 15: : examples of **fc_amat.random.randisym** function usage

```
X=fc_amat.random.randisym(10,100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randisym([-5,5],100,2,'class','single');
% Y: 50-by-2-by-2 single amat
disp('List current variables:')
whos
disp('Print Y amat object:')
Y
```

Output

```
List current variables :
Name              Size      Bytes Class  Attributes

SaveOptions        1x6         673   cell
X                  100x3x3     7232  amat
Y                  100x2x2     1632  amat
fcexrunoutputfilename 1x16         32   char

Print Y amat object :
Y =

Y is a 100x2x2 amat[single] object
Y(1)=
     4     1
     1     2

Y(2)=
     1     4
     4    -4

...

Y(99)=
    -5     3
     3    -4

Y(100)=
     4     5
     5     1
```

4.3.7 **fc_amat.random.randher** function

The **fc_amat.random.randher** function return an **amat** object whose matrices are hermitian with random real part elements uniformly distributed on the

interval $]0, 1[$ and imaginary part elements uniformly distributed on the interval $] - 1, 1[$.

Syntaxe

```
X=fc_amat.random.randher(N,d)
X=fc_amat.random.randher(...,'class',value)
```

Description

```
X=fc_amat.random.randher(N,d)
```

returns a **N-by-d-by-d** **amat** object whose matrices are symmetric with random elements uniformly distributed on the interval $]0, 1[$.

```
X=fc_amat.random.randher(...,'class',classname)
```

returns an **amat** object with values of class **classname**. **classname** could be **'single'** or **'double'** (default).

In Listing 16, some examples are provided.

Listing 16: : examples of `fc_amat.random.randher` function usage

```
X=fc_amat.random.randher(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randher(50,2,'class','single');
% Y: 50-by-2-by-2 single amat
disp('List current variables:')
whos
disp('Print Y amat object:')
Y
```

Output

```
List current variables :
Name              Size      Bytes Class  Attributes

SaveOptions        1x6          673   cell
X                  100x3x3     14432  amat
Y                   50x2x2      1632   amat
fcexrunoutputfilename 1x15         30   char

Print Y amat object :

Y =

Y is a 50x2x2 amat[complex single] object
Y(1)=
    0.5038 - 0.4281i    0.4067 - 0.7659i
    0.4067 + 0.7659i    0.5038 - 0.9608i

Y(2)=
    0.4896 + 0.0873i    0.6669 + 0.6294i
    0.6669 - 0.6294i    0.6128 - 0.1296i

...

Y(49)=
    0.9227 + 0.3077i    0.4385 + 0.7957i
    0.4385 - 0.7957i    0.0563 - 0.2196i

Y(50)=
    0.8004 - 0.8559i    0.4378 + 0.1867i
    0.4378 - 0.1867i    0.1525 - 0.2791i
```

4.3.8 `fc_amat.random.randnher` function

The `fc_amat.random.randnher` function return an `amat` object whose matrices are hermitian with normally distributed random real and imaginary part elements having zero mean and variance one.

Syntaxe

```
X=fc_amat.random.randnher(N,d)
X=fc_amat.random.randnher(...,'class',value)
```

Description

```
X=fc_amat.random.randnher(N,d)
```

returns a `N`-by-`d`-by-`d` `amat` object whose matrices are Hermitian normally distributed random elements having zero mean and variance one.

```
X=fc_amat.random.randnher(...,'class',classname)
```

returns an `amat` object with values of class `classname`. `classname` could be `'single'` or `'double'` (default).

In Listing 17, some examples are provided.

Listing 17: : examples of `fc_amat.random.randnher` function usage

```
X=fc_amat.random.randnher(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randnher(50,2,'class','single');
% Y: 50-by-2-by-2 single amat
disp('List current variables:');
whos
disp('Print Y amat object:');
Y
```

Output

```
List current variables :
Name          Size          Bytes Class  Attributes

SaveOptions    1x6             673  cell
X              100x3x3         14432 amat
Y              50x2x2          1632 amat
fcexrunoutputfilename 1x16             32  char

Print Y amat object :

Y =

Y is a 50x2x2 amat[complex single] object
Y(1)=
 1.3419 + 0.3210i -0.4049 - 0.5741i
-0.4049 + 0.5741i -1.5144 - 0.6035i

Y(2)=
-0.9884 + 1.6234i 0.5279 - 0.1952i
0.5279 + 0.1952i 1.0262 - 0.7970i

...

Y(49)=
0.8751 - 1.0922i 0.3024 - 0.1006i
0.3024 + 0.1006i 0.1736 + 0.4039i

Y(50)=
1.3954 - 0.2258i 0.0583 - 1.6250i
0.0583 + 1.6250i 0.4536 + 1.1925i
```

4.3.9 `fc_amat.random.randiher` function

The `fc_amat.random.randiher` function return an `amat` object whose matrices are Hermitian with random integers values.

Syntaxe

```
X=fc_amat.random.randiher(Imax,N,d)
X=fc_amat.random.randiher([Imin,Imax],...)
X=fc_amat.random.randiher(...,'class',classname)
```

Description

```
X=fc_amat.random.randiher(Imax,N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are Hermitian where real and imaginay part values are respectively drawn from the discrete uniform distribution on `1:Imax` and the discrete uniform distribution on `1:Imax` times a random sign.

```
X=fc_amat.random.randiher([Imin,Imax], ...)
```

pseudorandom integer values are drawn from the discrete uniform distribution on `Imin:Imax`

```
X=fc_amat.random.randiher(...,'class',classname)
```

returns an `amat` object with values of class `classname`. Accepted `classname` strings are those of the `randi` Matlab function. Default is `'double'`.

In Listing 18, some examples are provided.

Listing 18: : examples of `fc_amat.random.randiher` function usage

```
X=fc_amat.random.randiher(10,100,3); % X: 100-by-3-by-3 amat
info(X)
Y=fc_amat.random.randiher([-5,5],100,2,'class','single');
% Y: 50-by-2-by-2 single amat
disp('Print Y amat object:')
Y
```

Output

```
X is a 100x3x3 amat[complex double] object
Print Y amat object :

Y =

Y is a 100x2x2 amat[complex single] object
Y(1)=
-3.0000 - 3.0000i 5.0000 + 4.0000i
5.0000 - 4.0000i 3.0000 - 5.0000i

Y(2)=
-3.0000 + 4.0000i 1.0000 + 4.0000i
1.0000 - 4.0000i -3.0000 + 1.0000i

...

Y(99)=
1.0000 - 1.0000i 2.0000 + 0.0000i
2.0000 + 0.0000i -1.0000 - 5.0000i

Y(100)=
4.0000 - 1.0000i 4.0000 - 3.0000i
4.0000 + 3.0000i 1.0000 - 4.0000i
```

4.3.10 `fc_amat.random.randdiag` function

The `fc_amat.random.randdiag` function return an `amat` object whose matrices are diagonal with non zeros elements drawn from the uniform distribution on the interval $]a, b[$ $=]0, 1[$.

Syntaxe

```
X=fc_amat.random.randdiag(N,d)
X=fc_amat.random.randdiag(...,key,value)
```

Description

```
X=fc_amat.random.randdiag(N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are diagonal with non

zeros elements drawn from the uniform distribution on the interval $]a, b[$ $=]0, 1[$.

```
X=fc_amat.random.randdiag(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- **'complex'** , if value is **true** the **amat** object is complex and the imaginary parts of the diagonal matrices elements are also drawn from the uniform distribution on the interval $]a, b[$. (default **false** i.e real **amat** object)
- **'class'** , to set **amat** object data type; value could be **'single'** or **'double'** (default).
- **'nc'** , number of columns of the matrices (default: **d**)
- **'k'** , offset of **k** diagonals above or below the main diagonal; above for positive **k** and below for negative **k** .
- **'a'** , to set *a* (lower bound of the interval) value (0 by default).
- **'b'** , to set *b* (upper bound of the interval) value (1 by default).

In Listing 19, some examples are provided.

Listing 19: : examples of `fc_amat.random.randdiag` function usage

```
X=fc_amat.random.randdiag(100,3);
info(X) % X: 100-by-3-by-3 amat
Y=fc_amat.random.randdiag(200,3,'nc',4,'complex',true,'a',-1);
info(Y) % Y: 200-by-3-by-4 amat
Z=fc_amat.random.randdiag(50,3,'class','single','k',1,'b',5);
% Z: 50-by-3-by-3 single amat
disp('Print Z amat object: ')
disp(Z)
```

Output

```
X is a 100x3x3 amat[double] object
Y is a 200x3x3 amat[complex double] object
Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    0    0.7013    0
    0         0    1.5901
    0         0         0

Z(2)=
    0    1.3007    0
    0         0    3.0432
    0         0         0

...

Z(49)=
    0    4.2819    0
    0         0    0.7392
    0         0         0

Z(50)=
    0    2.0122    0
    0         0    0.9908
    0         0         0
```

4.3.11 `fc_amat.random.randndiag` function

The `fc_amat.random.randndiag` function return an `amat` object whose matrices are diagonal with non zeros elements drawn from the normal distribution having zero mean and unit standard deviation.

Syntaxe

```
X=fc_amat.random.randndiag(N,d)
X=fc_amat.random.randndiag(...,key,value)
```

Description

```
X=fc_amat.random.randndiag(N,d)
```

returns a `N`-by-`d`-by-`d` `amat` object whose matrices are diagonal with non zeros elements drawn from the normal distribution having zero mean and unit standard deviation.

```
X=fc_amat.random.randndiag(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- `'complex'` , if value is `true` the `amat` object is complex and the imaginary parts of the diagonal matrices elements are also drawn from the normal distribution having zero mean and unit standard deviation (default `false` i.e real `amat` object)
- `'class'` , to set `amat` object data type; value could be `'single'` or `'double'` (default).
- `'nc'` , number of columns of the matrices (default: `d`)
- `'k'` , offset of `k` diagonals above or below the main diagonal; above for positive `k` and below for negative `k` .
- `'mean'` , to set mean of the normal distribution (0 by default).
- `'sigma'` , to set standard deviation of the normal distribution (1 by default).

In Listing 20, some examples are provided.

Listing 20: : examples of `fc_amat.random.randndiag` function usage

```
X=fc_amat.random.randndiag(100,3);
info(X) % X: 100-by-3-by-3 amat
Y=fc_amat.random.randndiag(200,3,'nc',4,'complex',true,'sigma',5);
info(Y) % Y: 200-by-3-by-4 amat
Z=fc_amat.random.randndiag(50,3,'class','single','k',-1,'mean',4);
% Z: 50-by-3-by-3 single amat
disp('Print Z amat object:')
disp(Z)
```

Output

```
X is a 100x3x3 amat[double] object
Y is a 200x3x3 amat[complex double] object
Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    0         0         0
 2.3152         0         0
    0  4.4274         0

Z(2)=
    0         0         0
 4.4131         0         0
    0  4.1810         0

...

Z(49)=
    0         0         0
 4.0053         0         0
    0  2.9046         0

Z(50)=
    0         0         0
 5.1391         0         0
    0  4.5492         0
```

4.3.12 `fc_amat.random.randndiag` function

The `fc_amat.random.randndiag` function return an `amat` object whose matrices are diagonal and non zeros elements are random integers

Syntaxe

```
X=fc_amat.random.randndiag(Imax,N,d)
X=fc_amat.random.randndiag([Imin,Imax],...)
X=fc_amat.random.randndiag(...,key,value)
```

Description

```
X=fc_amat.random.randndiag(Imax,N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are diagonal and non zeros elements are pseudorandom integer drawn from the discrete uniform distribution on `1:Imax` .

```
X=fc_amat.random.randndiag([Imin,Imax],N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are diagonal and non zeros elements are pseudorandom integer drawn from the discrete uniform distribution on `Imin:Imax` .

```
X=fc_amat.random.randidiag(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- **'complex'**, if value is **true** the **amat** object is complex and the imaginary parts of the diagonal matrices elements are also drawn from the normal distribution having zero mean and unit standard deviation (default **false** i.e real **amat** object)
- **'class'**, to set **amat** object data type; value are those of the **randi** Matlab function. Default is **'double'**.
- **'nc'**, number of columns of the matrices (default: **d**)
- **'k'**, offset of **k** diagonals above or below the main diagonal; above for positive **k** and below for negative **k**.

In Listing 21, some examples are provided.

Listing 21: : examples of **fc_amat.random.randidiag** function usage

```
X=fc_amat.random.randidiag(10,100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randidiag(8,200,3,'nc',4,'complex',true);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randidiag([-5,5],50,3,'class','single','k',1);
% Z: 50-by-2-by-2 single amat
disp('List current variables:')
whos
disp('Print Z amat object:')
disp(Z,'n',2)
```

Output

```
List current variables :
Name          Size          Bytes Class  Attributes

SaveOptions    1x6             673   cell
X              100x3x3         7232  amat
Y              200x3x3        28832  amat
Z              50x3x3         1832  amat
fcexrunoutputfilename 1x17          34   char

Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    0    -4     0
    0     0    -2
    0     0     0

Z(2)=
    0    -3     0
    0     0     1
    0     0     0

...

Z(49)=
    0     4     0
    0     0    -4
    0     0     0

Z(50)=
    0    -1     0
    0     0    -3
    0     0     0
```

4.3.13 `fc_amat.random.randtril` function

The `fc_amat.random.randtril` function return an `amat` object whose matrices are lower triangular with non zeros elements drawn from the uniform distribution on the interval $]a, b[$ $[=]0, 1[$.

Syntaxe

```
X=fc_amat.random.randtril(N,d)
X=fc_amat.random.randtril(...,key,value)
```

Description

```
X=fc_amat.random.randtril(N,d)
```

returns a N -by- d -by- d `amat` object whose matrices are lower triangular with non zeros elements drawn from the uniform distribution on the interval $]a, b[$ $[=]0, 1[$.

```
X=fc_amat.random.randtril(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- `'complex'` , if value is `true` the `amat` object is complex and the imaginary parts of the lower triangular matrices elements are also drawn from the uniform distribution on the interval $]a, b[$. (default `false` i.e real `amat` object)
- `'class'` , to set `amat` object data type; value could be `'single'` or `'double'` (default).
- `'nc'` , number of columns of the matrices (default: `d`)
- `'k'` , offset of `k` diagonals above or below the main diagonal; above for positive `k` and below for negative `k` .
- `'a'` , to set a (lower bound of the interval) value (0 by default).
- `'b'` , to set b (upper bound of the interval) value (1 by default).

In Listing 22, some examples are provided.

Listing 22: : examples of `fc_amat.random.randtril` function usage

```
X=fc_amat.random.randtril(100,3);
info(X) % X: 100-by-3-by-3 amat
Y=fc_amat.random.randtril(200,3,'nc',4,'complex',true,'a',-1);
info(Y) % Y: 200-by-3-by-4 amat
Z=fc_amat.random.randtril(50,3,'class','single','k',1,'b',5);
% Z: 50-by-3-by-3 single amat
disp('Print Z amat object:')
disp(Z)
```

Output

```
X is a 100x3x3 amat[double] object
Y is a 200x3x4 amat[complex double] object
Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    1.8980    3.7119         0
    4.7610    1.7555    1.2448
    2.5337    2.7349    2.8706

Z(2)=
    1.5953    4.6872         0
    2.7164    0.2715    1.9321
    1.9063    2.0148    2.4347

...

Z(49)=
    0.1900    3.2218         0
    3.9782    2.3686    0.0738
    4.8427    1.0322    3.7255

Z(50)=
    4.7712    0.8462         0
    3.9055    4.7560    3.5138
    0.4938    1.6930    3.6469
```

4.3.14 `fc_amat.random.randntril` function

The `fc_amat.random.randntril` function return an `amat` object whose matrices are lower triangular with non zeros elements drawn from the normal distribution having zero mean and unit standard deviation.

Syntaxe

```
X=fc_amat.random.randntril(N,d)
X=fc_amat.random.randntril(...,key,value)
```

Description

```
X=fc_amat.random.randntril(N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are lower triangular with non zeros elements drawn from the normal distribution having zero mean and unit standard deviation.

```
X=fc_amat.random.randntril(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- `'complex'` , if value is `true` the `amat` object is complex and the imaginary parts of the lower triangular matrices elements are also

drawn from the normal distribution having zero mean and unit standard deviation (default `false` i.e real `amat` object)

- `'class'` , to set `amat` object data type; value could be `'single'` or `'double'` (default).
- `'nc'` , number of columns of the matrices (default: `d`)
- `'k'` , offset of `k` diagonals above or below the main diagonal; above for positive `k` and below for negative `k` .
- `'mean'` , to set mean of the normal distribution (0 by default).
- `'sigma'` , to set standard deviation of the normal distribution (1 by default).

In Listing 23, some examples are provided.

Listing 23: : examples of `fc_amat.random.randntril` function usage

```

X=fc_amat.random.randntril(100,3);
info(X) % X: 100-by-3-by-3 amat
Y=fc_amat.random.randntril(200,3,'nc',4,'complex',true,'sigma',5);
info(Y) % Y: 200-by-3-by-4 amat
Z=fc_amat.random.randntril(50,3,'class','single','k',-1,'mean',4);
% Z: 50-by-3-by-3 single amat
disp('Print Z amat object:')
disp(Z)

```

Output

```

X is a 100x3x3 amat[double] object
Y is a 200x3x4 amat[complex double] object
Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    0         0         0
  3.8961         0         0
  4.8726  4.6571         0

Z(2)=
    0         0         0
  3.1771         0         0
  4.1179  3.2465         0

...

Z(49)=
    0         0         0
  2.2368         0         0
  4.9195  3.3574         0

Z(50)=
    0         0         0
  3.6767         0         0
  4.8522  3.9211         0

```

4.3.15 `fc_amat.random.randitril` function

The `fc_amat.random.randitril` function return an `amat` object whose matrices are lower triangular and non zeros elements are random integers

Syntaxe

```
X=fc_amat.random.randitril(Imax,N,d)
X=fc_amat.random.randitril([Imin,Imax],...)
X=fc_amat.random.randitril(...,key,value)
```

Description

```
X=fc_amat.random.randitril(Imax,N,d)
```

returns a **N**-by-**d**-by-**d** **amat** object whose matrices are lower triangular and non zeros elements are pseudorandom integer drawn from the discrete uniform distribution on **1:Imax** .

```
X=fc_amat.random.randitril([Imin,Imax],N,d)
```

returns a **N**-by-**d**-by-**d** **amat** object whose matrices are lower triangular and non zeros elements are pseudorandom integer drawn from the discrete uniform distribution on **Imin:Imax** .

```
X=fc_amat.random.randitril(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- **'complex'** , if value is **true** the **amat** object is complex and the imaginary parts of the lower triangular matrices elements are also drawn from the normal distribution having zero mean and unit standard deviation (default **false** i.e real **amat** object)
- **'class'** , to set **amat** object data type; value are those of the **randi** Matlab function. Default is **'double'** .
- **'nc'** , number of columns of the matrices (default: **d**)
- **'k'** , offset of **k** diagonals above or below the main diagonal; above for positive **k** and below for negative **k** .

In Listing 24, some examples are provided.

Listing 24: : examples of `fc_amat.random.randitriu` function usage

```
X=fc_amat.random.randitriu(10,100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randitriu(8,200,3,'nc',4,'complex',true);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randitriu([-5,5],50,3,'class','single','k',1);
% Z: 50-by-2-by-2 single amat
disp('List current variables: ')
whos
disp('Print Z amat object: ')
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions       1x6             673   cell
X                 100x3x3         7232  amat
Y                 200x3x4        38432  amat
Z                 50x3x3         1832  amat
fcexrunoutputfilename 1x17           34   char

Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    -1     3     0
     5    -2    -3
     0     1     1

Z(2)=
    -2     5     0
     0    -5    -1
    -1    -1     0

...

Z(49)=
    -5     2     0
     3     0    -5
     5    -3     3

Z(50)=
     5    -4     0
     3     5     2
    -4    -2     3
```

4.3.16 `fc_amat.random.randtriu` function

The `fc_amat.random.randtriu` function return an `amat` object whose matrices are upper triangular with non zeros elements drawn from the uniform distribution on the interval $]a, b[=]0, 1[$.

Syntaxe

```
X=fc_amat.random.randtriu(N,d)
X=fc_amat.random.randtriu(...,key,value)
```

Description

```
X=fc_amat.random.randtriu(N,d)
```

returns a **N**-by-**d**-by-**d** `amat` object whose matrices are diagonal with non zeros elements drawn from the uniform distribution on the interval $]a, b[=]0, 1[$.

```
X=fc_amat.random.randtriu(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- **'complex'**, if value is **true** the **amat** object is complex and the imaginary parts of the upper triangular matrices elements are also drawn from the uniform distribution on the interval $]a, b[$. (default **false** i.e real **amat** object)
- **'class'**, to set **amat** object data type; value could be **'single'** or **'double'** (default).
- **'nc'**, number of columns of the matrices (default: **d**)
- **'k'**, offset of **k** diagonals above or below the main diagonal; above for positive **k** and below for negative **k**.
- **'a'**, to set a (lower bound of the interval) value (0 by default).
- **'b'**, to set b (upper bound of the interval) value (1 by default).

In Listing 25, some examples are provided.

Listing 25: : examples of **fc_amat.random.randtriu** function usage

```
X=fc_amat.random.randtriu(100,3);
info(X) % X: 100-by-3-by-3 amat
Y=fc_amat.random.randtriu(200,3,'nc',4,'complex',true,'a',-1);
info(Y) % Y: 200-by-3-by-4 amat
Z=fc_amat.random.randtriu(50,3,'class','single','k',-1,'b',5);
% Z: 50-by-3-by-3 single amat
disp('Print_Z_amat_object:')
disp(Z)
```

Output

```
X is a 100x3x3 amat[double] object
Y is a 200x3x4 amat[complex double] object
Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    0.6266    1.2508    2.6523
    4.2032    3.7222    4.7936
         0    4.9171    3.2082

Z(2)=
    1.8224    3.1229    0.3704
    2.3441    4.1967    3.5592
         0    4.4815    3.9319

...

Z(49)=
    4.9196    0.7504    4.9152
    2.3943    3.4633    4.6067
         0    0.2439    1.2681

Z(50)=
    4.8989    4.7924    2.9260
    1.5406    1.0191    4.9201
         0    1.5692    4.2159
```

4.3.17 **fc_amat.random.randntriu** function

The **fc_amat.random.randntriu** function return an **amat** object whose matrices are upper triangular with non zeros elements drawn from the normal distribution having zero mean and unit standard deviation.

Syntaxe

```
X=fc_amat.random.randntriu(N,d)
X=fc_amat.random.randntriu(...,key,value)
```

Description

```
X=fc_amat.random.randntriu(N,d)
```

returns a **N**-by-**d**-by-**d** **amat** object whose matrices are upper triangular with non zeros elements drawn from the normal distribution having zero mean and unit standard deviation.

```
X=fc_amat.random.randntriu(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- **'complex'** , if value is **true** the **amat** object is complex and the imaginary parts of the upper triangular matrices elements are also drawn from the normal distribution having zero mean and unit standard deviation (default **false** i.e real **amat** object)
- **'class'** , to set **amat** object data type; value could be **'single'** or **'double'** (default).
- **'nc'** , number of columns of the matrices (default: **d**)
- **'k'** , offset of **k** diagonals above or below the main diagonal; above for positive **k** and below for negative **k** .
- **'mean'** , to set mean of the normal distribution (0 by default).
- **'sigma'** , to set standard deviation of the normal distribution (1 by default).

In Listing 26, some examples are provided.

Listing 26: : examples of `fc_amat.random.randntriu` function usage

```
X=fc_amat.random.randntriu(100,3);
info(X) % X: 100-by-3-by-3 amat
Y=fc_amat.random.randntriu(200,3,'nc',4,'complex',true,'sigma',5);
info(Y) % Y: 200-by-3-by-4 amat
Z=fc_amat.random.randntriu(50,3,'class','single','k',-1,'mean',4);
% Z: 50-by-3-by-3 single amat
disp('Print Z amat object:')
disp(Z)
```

Output

```
X is a 100x3x3 amat[double] object
Y is a 200x3x4 amat[complex double] object
Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    1.9633    3.9498    3.9330
    2.8153    3.9781    5.8515
         0    3.9147    2.2565

Z(2)=
    4.0779    3.6113    3.2827
    4.3404    5.0548    3.9939
         0    2.7159    5.4148

...

Z(49)=
    3.2304    4.5675    3.1868
    4.7068    4.8699    3.9731
         0    3.0846    4.8731

Z(50)=
    2.7639    4.2766    4.1320
    5.5403    3.8129    3.2579
         0    4.9401    3.4746
```

4.3.18 `fc_amat.random.randitriu` function

The `fc_amat.random.randitriu` function return an `amat` object whose matrices are upper triangular and non zeros elements are random integers

Syntaxe

```
X=fc_amat.random.randitriu(Imax,N,d)
X=fc_amat.random.randitriu([Imin,Imax],...)
X=fc_amat.random.randitriu(...,key,value)
```

Description

```
X=fc_amat.random.randitriu(Imax,N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are upper triangular and non zeros elements are pseudorandom integer drawn from the discrete uniform distribution on `1:Imax`.

```
X=fc_amat.random.randitriu([Imin,Imax],N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are upper triangular and non zeros elements are pseudorandom integer drawn from the discrete uniform distribution on `Imin:Imax`.

```
X=fc_amat.random.randitriu(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- **'complex'**, if value is **true** the **amat** object is complex and the imaginary parts of the upper triangular matrices elements are also drawn from the normal distribution having zero mean and unit standard deviation (default **false** i.e real **amat** object)
- **'class'**, to set **amat** object data type; value are those of the **randi** Matlab function. Default is **'double'**.
- **'nc'**, number of columns of the matrices (default: **d**)
- **'k'**, offset of **k** diagonals above or below the main diagonal; above for positive **k** and below for negative **k**.

In Listing 27, some examples are provided.

Listing 27: : examples of `fc_amat.random.randitriu` function usage

```
X=fc_amat.random.randitriu(10,100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randitriu(8,200,3,'nc',4,'complex',true);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randitriu([-5,5],50,3,'class','single','k',1);
% Z: 50-by-2-by-2 single amat
disp('List current variables:')
whos
disp('Print Z amat object:')
disp(Z,'n',2)
```

Output

```
List current variables :
Name          Size          Bytes Class  Attributes

SaveOptions    1x6             673  cell
X              100x3x3         7232  amat
Y              200x3x4        38432  amat
Z              50x3x3         1832  amat
fcexrunoutputfilename 1x17          34  char

Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    0    -4    -3
    0     0     0
    0     0     0

Z(2)=
    0    -1     1
    0     0    -5
    0     0     0

...

Z(49)=
    0     5    -4
    0     0     5
    0     0     0

Z(50)=
    0     5     5
    0     0     1
    0     0     0
```

4.3.19 `fc_amat.random.randsdd` function

The `fc_amat.random.randsdd` function return an `amat` object whose matrices are strictly diagonally dominant with non-diagonal elements drawn from the uniform distribution on the interval $]a, b[=]0, 1[$.

Syntaxe

```
X=fc_amat.random.randsdd(N,d)
X=fc_amat.random.randsdd(...,key,value)
```

Description

```
X=fc_amat.random.randsdd(N,d)
```

returns a **N-by-d-by-d** `amat` object whose matrices are strictly diagonally dominant with non-diagonal elements drawn from the uniform distribution on the interval $]a, b[=]0, 1[$.

```
X=fc_amat.random.randsdd(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- `'complex'` , if value is `true` the `amat` object is complex and the imaginary parts elements are also drawn from the uniform distribution on the interval $]a, b[=]0, 1[$. (default `false` i.e real `amat` object)
- `'class'` , to set `amat` object data type; value could be `'single'` or `'double'` (default).
- `'a'` , to set a (lower bound of the interval) value (0 by default).
- `'b'` , to set b (upper bound of the interval) value (1 by default).

In Listing 28, some examples are provided.

Listing 28: : examples of `fc_amat.random.randsdd` function usage

```
X=fc_amat.random.randsdd(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randsdd(200,3,'a',-2,'b',2);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randsdd(50,3,'complex',true,'a',-1,'class','single');
% Z: 50-by-3-by-3 single amat
disp('List current variables:');
whos
disp('Print Z amat object:');
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions        1x6             673   cell
X                  100x3x3         7232  amat
Y                  200x3x3        14432  amat
Z                   50x3x3         3632  amat
fcexrunoutputfilename 1x15           30   char

Print Z amat object :
Z is a 50x3x3 amat[complex single] object
Z(1)=
 2.8843 - 0.3015i -0.6963 - 0.7494i 0.7247 + 0.6813i
 0.5270 + 0.7701i -1.4158 - 1.7475i 0.5716 + 0.4889i
 0.6897 - 0.2498i 0.8189 + 0.0609i -0.6773 + 2.3895i

Z(2)=
 1.1409 - 0.8701i -0.2387 - 0.2710i 0.7928 - 0.0624i
 -0.9023 + 0.6796i 0.7288 - 3.1322i 0.8451 + 0.6787i
 0.6331 + 0.6578i -0.8843 - 0.8518i 3.1005 + 0.5283i

...

Z(49)=
 1.8708 + 0.5921i 0.0946 + 0.9678i 0.3094 - 0.0423i
 0.5501 - 0.4129i -0.0539 + 2.3680i -0.6998 + 0.3853i
 0.6844 + 0.5281i -0.4048 + 0.9661i 0.0471 + 3.0565i

Z(50)=
 -1.1309 + 2.6668i 0.1070 + 0.9596i -0.9477 - 0.3838i
 -0.5264 - 0.7696i 1.6560 - 2.4976i 0.9826 - 0.5924i
 0.0333 + 0.9759i 0.0501 + 0.1704i -2.1163 + 0.7265i
```

4.3.20 `fc_amat.random.randnsdd` function

The `fc_amat.random.randnsdd` function return an `amat` object whose matrices are strictly diagonally dominant with non-diagonal elements drawn from the normal distribution having zero mean and unit standard deviation.

Syntaxe

```
X=fc_amat.random.randnsdd(N,d)
X=fc_amat.random.randnsdd(...,key,value)
```

Description

```
X=fc_amat.random.randnsdd(N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are strictly diagonally dominant with non-diagonal elements drawn from the normal distribution having zero mean and unit standard deviation.

```
X=fc_amat.random.randnsdd(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- **'complex'**, if value is **true** the **amat** object is complex and the imaginary parts of the upper triangular matrices elements are also drawn from the normal distribution having zero mean and unit standard deviation (default **false** i.e real **amat** object)
- **'class'**, to set **amat** object data type; value could be **'single'** or **'double'** (default).
- **'mean'**, to set mean of the normal distribution (0 by default).
- **'sigma'**, to set standard deviation of the normal distribution (1 by default).

In Listing 29, some examples are provided.

Listing 29: : examples of **fc_amat.random.randnsdd** function usage

```
X=fc_amat.random.randnsdd(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randnsdd(200,3,'complex',true,'sigma',5);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randnsdd(50,3,'class','single','mean',5);
% Z: 50-by-3-by-3 single amat
disp('List current variables:');
whos
disp('Print Z amat object:');
disp(Z,'n',2)
```

Output

```
List current variables :
  Name          Size          Bytes Class  Attributes

SaveOptions      1x6           673   cell
X                100x3x3         7232  amat
Y                200x3x3        28832  amat
Z                 50x3x3         1832  amat
fcexrunoutputfilename 1x16           32   char

Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
 14.9935   3.8108   4.8541
  6.5726  16.0219   4.0699
  5.1120   5.3285 -15.7116

Z(2)=
-11.7322   3.0651   3.8616
  6.0557 -18.1866   5.3382
  6.6613   4.0512  16.0673

...

Z(49)=
 14.4837   5.0342   5.1701
  5.1146 -15.5134   7.1708
  5.3230   6.1006 -17.4436

Z(50)=
-16.8319   4.6791   6.3048
  4.2776 -13.9625   4.6583
  4.0640   5.3629  14.7697
```

4.3.21 `fc_amat.random.randisdd` function

The `fc_amat.random.randisdd` function return an `amat` object whose matrices are strictly diagonally dominant with random integers

Syntaxe

```
X=fc_amat.random.randisdd(Imax,N,d)
X=fc_amat.random.randisdd([Imin,Imax],...)
X=fc_amat.random.randisdd(...,key,value)
```

Description

```
X=fc_amat.random.randisdd(Imax,N,d)
```

returns a **N-by-d-by-d** `amat` object whose matrices are strictly diagonally dominant and non-diagonal elements are pseudo random integer drawn from the discrete uniform distribution on `1:Imax`.

```
X=fc_amat.random.randisdd([Imin,Imax],N,d)
```

returns a **N-by-d-by-d** `amat` object whose matrices are strictly diagonally dominant and non-diagonal elements are pseudo random integer drawn from the discrete uniform distribution on `Imin:Imax`.

```
X=fc_amat.random.randisdd(...,key,value)
```

Some optional key/value pairs arguments are available with keys:

- `'complex'`, if value is `true` the `amat` object is complex and the imaginary parts of the non-diagonal elements are also drawn from the discrete uniform distribution (default `false` i.e real `amat` object).
- `'class'`, to set `amat` object data type; value are those of the `randi` Matlab function. Default is `'double'`.

In Listing 30, some examples are provided.

Listing 30: : examples of `fc_amat.random.randisdd` function usage

```
X=fc_amat.random.randisdd(10,100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randisdd(8,200,3,'class','single');
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randisdd([-5,5],50,3,'class','single','complex',true);
% Z: 50-by-2-by-2 single amat
disp('List current variables:');
whos
disp('Print Z amat object:');
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions       1x6             673   cell
X                  100x3x3         7232  amat
Y                  200x3x3         7232  amat
Z                  50x3x3          3632  amat
fcexrunoutputfilename 1x16           32   char

Print Z amat object :
Z is a 50x3x3 amat[complex single] object
Z(1)=
 9.0000 +17.0000i 4.0000 + 4.0000i 2.0000 + 5.0000i
 1.0000 - 3.0000i 4.0000 -14.0000i 4.0000 + 2.0000i
 5.0000 + 0.0000i -1.0000 + 5.0000i 10.0000 +10.0000i

Z(2)=
 8.0000 - 9.0000i 4.0000 + 0.0000i 1.0000 + 4.0000i
 5.0000 + 1.0000i -13.0000 +13.0000i 4.0000 + 3.0000i
 -5.0000 - 5.0000i 5.0000 + 2.0000i 21.0000 + 3.0000i

...

Z(49)=
 -7.0000 -14.0000i 2.0000 + 0.0000i -3.0000 - 5.0000i
 3.0000 - 4.0000i 7.0000 -14.0000i -2.0000 - 3.0000i
 -2.0000 + 5.0000i -4.0000 + 5.0000i 3.0000 -18.0000i

Z(50)=
 5.0000 -17.0000i -5.0000 - 2.0000i -5.0000 - 2.0000i
 0.0000 + 5.0000i -12.0000 -14.0000i -4.0000 + 4.0000i
 0.0000 + 1.0000i 3.0000 + 5.0000i 2.0000 +14.0000i
```

4.3.22 `fc_amat.random.randsympd` function

The `fc_amat.random.randsympd` function return an `amat` object whose matrices are symmetric positive definite. This object is generated by using `randsdd` function from `fc_amat.random` namespace.

Syntaxe

```
X=fc_amat.random.randsympd(N,d)
X=fc_amat.random.randsympd(...,key,value)
```

Description

```
X=fc_amat.random.randsympd(N,d)
```

returns a `N`-by-`d`-by-`d` `amat` object whose matrices are symmetric positive definite.

```
X=fc_amat.random.randnsympd(...,key,value)
```

Optional key/value pairs arguments are those of the `fc_amat.random.randnsdd` function except for `'complex'` key which is forced to `false`. Keys can be:

- `'class'`, to set `amat` object data type; value can be `'single'` or `'double'` (default).
- `'a'`, to set a (lower bound of the interval) value (0 by default).
- `'b'`, to set b (upper bound of the interval) value (1 by default).

In Listing 31, some examples are provided.

Listing 31: : examples of `fc_amat.random.randnsympd` function usage

```
X=fc_amat.random.randnsympd(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randnsympd(200,3,'a',-2,'b',2);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randnsympd(50,3,'a',-1,'class','single');
% Z: 50-by-3-by-3 single amat
disp('List current variables: ')
whos
disp('Print Z amat object: ')
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size      Bytes Class  Attributes

SaveOptions        1x6         673   cell
X                  100x3x3      7232  amat
Y                  200x3x3     14432  amat
Z                   50x3x3      1832  amat
fcexrunoutputfilename 1x17         34   char

Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    5.8555   -0.2914    0.7971
   -0.2914    3.0042   -1.0823
    0.7971   -1.0823    3.5891

Z(2)=
    2.7439   -3.3075    1.7550
   -3.3075    8.2281   -0.0391
    1.7550   -0.0391    7.2384

...

Z(49)=
    1.1942   -1.3214    0.6896
   -1.3214    3.3648    0.5249
    0.6896    0.5249    4.0609

Z(50)=
    1.4089    0.6835    0.5095
    0.6835    2.2980   -1.5578
    0.5095   -1.5578    2.1885
```

4.3.23 `fc_amat.random.randnsympd` function

The `fc_amat.random.randnsympd` function return an `amat` object whose matrices are symmetric positive definite. This object is generated by using `fc_amat.random.randnsdd` function.

Syntaxe

```
X=fc_amat.random.randnsympd(N,d)
X=fc_amat.random.randnsympd(...,key,value)
```

Description

```
X=fc_amat.random.randnsympd(N,d)
```

returns a **N**-by-**d**-by-**d** **amat** object whose matrices are symmetric positive definite.

```
X=fc_amat.random.randnsympd(...,key,value)
```

Optional key/value pairs arguments are those of the **fc_amat.random.randnsdd** function except for **'complex'** key which is forced to **false**. Keys can be:

- **'class'**, to set **amat** object data type; value can be **'single'** or **'double'** (default).
- **'mean'**, to set mean of the normal distribution (0 by default).
- **'sigma'**, to set standard deviation of the normal distribution (1 by default).

In Listing 32, some examples are provided.

Listing 32: : examples of `fc_amat.random.randnsympd` function usage

```
X=fc_amat.random.randnsympd(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randnsympd(200,3,'sigma',5);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randnsympd(50,3,'class','single','mean',5);
% Z: 50-by-3-by-3 single amat
disp('List current variables: ')
whos
disp('Print Z amat object: ')
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size          Bytes Class    Attributes

SaveOptions        1x6             673   cell
X                  100x3x3         7232  amat
Y                  200x3x3        14432  amat
Z                   50x3x3         1832  amat
fcexrunoutputfilename 1x18            36   char

Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
259.0745 -150.2612 -99.9897
-150.2612 365.9420 -141.3501
-99.9897 -141.3501 224.8158

Z(2)=
290.4875 -168.3739 36.5276
-168.3739 358.9001 54.7849
36.5276 54.7849 297.8479

...

Z(49)=
308.4285 1.9906 54.0225
1.9906 224.9108 151.7461
54.0225 151.7461 301.8139

Z(50)=
259.6917 137.2443 8.2705
137.2443 253.3166 67.6369
8.2705 67.6369 269.5292
```

4.3.24 `fc_amat.random.randisympd` function

The `fc_amat.random.randisympd` function return an `amat` object whose matrices are symmetric positive definite with random integers. This object is generated by using `randisympd` function from `fc_amat.random` namespace.

Syntaxe

```
X=fc_amat.random.randisympd(Imax,N,d)
X=fc_amat.random.randisympd([Imin,Imax],...)
X=fc_amat.random.randisympd(...,key,value)
```

Description

```
X=fc_amat.random.randisympd(Imax,N,d)
```

returns a `N-by-d-by-d` `amat` object whose matrices are strictly diagonally

dominant and non-diagonal elements are pseudo random integer drawn from the discrete uniform distribution on `1:Imax`.

```
X=fc_amat.random.randisympd([Imin,Imax],N,d)
```

returns a `N-by-d-by-d amat` object whose matrices are strictly diagonally dominant and non-diagonal elements are pseudo random integer drawn from the discrete uniform distribution on `Imin:Imax`.

```
X=fc_amat.random.randisympd(...,key,value)
```

Optional key/value pairs arguments are those of the `randisdd` function except for `'complex'` key which is forced to `false` and `'class'` key which can only be `'single'` or `'double'`. Keys can be:

- `'class'`, to set `amat` object data type; value can be `'single'` or `'double'` (default).

In Listing 33, some examples are provided.

Listing 33: : examples of `fc_amat.random.randisympd` function usage

```
X=fc_amat.random.randisympd(10,100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randisympd(8,200,3,'class','single');
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randisympd([-5,5],50,3,'class','single');
% Z: 50-by-2-by-2 single amat
disp('List current variables: ')
whos
disp('Print Z amat object: ')
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions        1x6             673   cell
X                  100x3x3         7232  amat
Y                  200x3x3         7232  amat
Z                   50x3x3         1832  amat
fcexrunoutputfilename 1x18            36   char

Print Z amat object :
Z is a 50x3x3 amat[single] object
Z(1)=
    147    48    66
     48    98    36
     66    36    84

Z(2)=
     99    -72   -48
    -72   266    19
    -48    19   242

...

Z(49)=
     62     24    -5
     24   120   -66
     -5   -66   113

Z(50)=
    144   -60   -60
    -60   134    92
    -60    92   122
```

4.3.25 `fc_amat.random.randherpd` function

The `fc_amat.random.randherpd` function return an `amat` object whose matrices are hermitian positive definite. This object is generated by using `randsdd` function from `fc_amat.random` namespace.

Syntaxe

```
X=fc_amat.random.randherpd(N,d)
X=fc_amat.random.randherpd(...,key,value)
```

Description

```
X=fc_amat.random.randherpd(N,d)
```

returns a `N`-by-`d`-by-`d` `amat` object whose matrices are symmetric positive definite.

```
X=fc_amat.random.randherpd(...,key,value)
```

Optional key/value pairs arguments are those of the `fc_amat.random.randsdd` function except for `'complex'` key which is forced to `true`. keys can be:

- `'class'`, to set `amat` object data type; value can be `'single'` or `'double'` (default).
- `'a'`, to set a (lower bound of the interval) value (0 by default).
- `'b'`, to set b (upper bound of the interval) value (1 by default).

In Listing 34, some examples are provided.

Listing 34: : examples of `fc_amat.random.randherpd` function usage

```
X=fc_amat.random.randherpd(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randherpd(200,3,'a',-2,'b',2);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randherpd(50,3,'a',-1,'class','single');
% Z: 50-by-3-by-3 single amat
disp('List current variables:');
whos
disp('Print Z amat object:');
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions        1x6             673   cell
X                  100x3x3         14432  amat
Y                  200x3x3         28832  amat
Z                   50x3x3          3632   amat
fcexrunoutputfilename 1x17            34    char

Print Z amat object :
Z is a 50x3x3 amat[complex single] object
Z(1)=
 2.6363 + 0.0000i -0.3336 - 0.9376i 2.2724 - 0.2571i
-0.3336 + 0.9376i 6.6370 + 0.0000i -1.8343 + 3.4740i
 2.2724 + 0.2571i -1.8343 - 3.4740i 7.1614 + 0.0000i

Z(2)=
 6.7001 + 0.0000i 1.0940 - 4.1729i 1.7635 - 0.3262i
 1.0940 + 4.1729i 8.1097 + 0.0000i 1.0601 - 0.0978i
 1.7635 + 0.3262i 1.0601 + 0.0978i 2.9646 + 0.0000i

...

Z(49)=
 9.0330 + 0.0000i 1.7173 - 1.4282i 3.4638 - 0.9305i
 1.7173 + 1.4282i 4.7652 + 0.0000i 0.0708 + 2.4355i
 3.4638 + 0.9305i 0.0708 - 2.4355i 5.5916 + 0.0000i

Z(50)=
13.2686 + 0.0000i -0.2314 + 0.8565i -6.4115 - 2.9403i
-0.2314 - 0.8565i 11.8201 + 0.0000i -3.7681 + 0.8334i
-6.4115 + 2.9403i -3.7681 - 0.8334i 9.5450 + 0.0000i
```

4.3.26 `fc_amat.random.randnherpd` function

The `fc_amat.random.randnherpd` function return an `amat` object whose matrices are hermitian positive definite. This object is generated by using `randnsdd` function from `fc_amat.random` namespace.

Syntaxe

```
X=fc_amat.random.randnherpd(N,d)
X=fc_amat.random.randnherpd(...,key,value)
```

Description

```
X=fc_amat.random.randnherpd(N,d)
```

returns a `N`-by-`d`-by-`d` `amat` object whose matrices are Hermitian positive definite.

```
X=fc_amat.random.randnherpd(...,key,value)
```

Optional key/value pairs arguments are those of the `randnsdd` function except for `'complex'` key which is forced to `true`. Keys can be:

- `'class'`, to set `amat` object data type; value can be `'single'` or `'double'` (default).
- `'mean'`, to set mean of the normal distribution (0 by default).
- `'sigma'`, to set standard deviation of the normal distribution (1 by default).

In Listing 35, some examples are provided.

Listing 35: : examples of `fc_amat.random.randnherpd` function usage

```
X=fc_amat.random.randnherpd(100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randnherpd(200,3,'sigma',5);
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randnherpd(50,3,'class','single','mean',5);
% Z: 50-by-3-by-3 single amat
disp('List current variables:');
whos
disp('Print Z amat object:');
disp(Z,'n',2)
```

Output

```
List current variables :
Name          Size          Bytes Class  Attributes

SaveOptions    1x6             673   cell
X              100x3x3         14432  amat
Y              200x3x3         28832  amat
Z              50x3x3          3632   amat
fcexrunoutputfilename 1x18           36   char

Print Z amat object :
Z is a 50x3x3 amat[complex single] object
Z(1)=
1.0e+02 *

5.5952 + 0.0000i 1.4791 + 3.2441i -0.6622 + 2.4489i
1.4791 - 3.2441i 6.2931 + 0.0000i -0.4961 + 0.3382i
-0.6622 - 2.4489i -0.4961 - 0.3382i 6.8153 + 0.0000i

Z(2)=
1.0e+02 *

5.6793 + 0.0000i 2.9387 - 1.8670i 2.7489 - 1.5817i
2.9387 + 1.8670i 5.6718 + 0.0000i 2.2443 + 0.2267i
2.7489 + 1.5817i 2.2443 - 0.2267i 5.2918 + 0.0000i

...

Z(49)=
1.0e+02 *

5.0513 + 0.0000i -2.1143 + 0.7183i -1.3965 - 0.3477i
-2.1143 - 0.7183i 5.3161 + 0.0000i -1.7460 + 0.2400i
-1.3965 + 0.3477i -1.7460 - 0.2400i 4.7632 + 0.0000i

Z(50)=
1.0e+02 *

5.2906 + 0.0000i 1.6293 - 0.2617i 0.6918 - 2.6042i
1.6293 + 0.2617i 4.9432 + 0.0000i 0.6616 - 2.8367i
0.6918 + 2.6042i 0.6616 + 2.8367i 5.2710 + 0.0000i
```

4.3.27 `fc_amat.random.randiherpd` function

The `fc_amat.random.randiherpd` function return an `amat` object whose matrices are Hermitian positive definite with random integers. This object is generated by using `randiherpd` function from `fc_amat.random` namespace.

Syntaxe

```
X=fc_amat.random.randiherpd(Imax,N,d)
X=fc_amat.random.randiherpd([Imin,Imax],...)
X=fc_amat.random.randiherpd(...,key,value)
```

Description

```
X=fc_amat.random.randiherpd(Imax,N,d)
```

returns a `N`-by-`d`-by-`d` `amat` object whose matrices are strictly diagonally dominant and non-diagonal elements are pseudorandom integer drawn from the discrete uniform distribution on `1:Imax`.

```
X=fc_amat.random.randiherpd([Imin,Imax],N,d)
```

returns a `N`-by-`d`-by-`d` `amat` object whose matrices are strictly diagonally dominant and non-diagonal elements are pseudorandom integer drawn from the discrete uniform distribution on `Imin:Imax`.

```
X=fc_amat.random.randiherpd(...,key,value)
```

Optional key/value pairs arguments are those of the `randisdd` function except for `'complex'` key which is forced to `true` and `'class'` key which can only be `'single'` or `'double'`. Keys can be:

- `'class'`, to set `amat` object data type; value can be `'single'` or `'double'` (default).

In Listing 36, some examples are provided.

Listing 36: : examples of `fc_amat.random.randiherpd` function usage

```
X=fc_amat.random.randiherpd(10,100,3);
% X: 100-by-3-by-3 amat
Y=fc_amat.random.randiherpd(8,200,3,'class','single');
% Y: 200-by-3-by-4 amat
Z=fc_amat.random.randiherpd([-5,5],50,3,'class','single');
% Z: 50-by-2-by-2 single amat
disp('List current variables:');
whos
disp('Print Z amat object:');
disp(Z,'n',2)
```

Output

```
List current variables :
Name              Size          Bytes Class  Attributes

SaveOptions        1x6             673   cell
X                  100x3x3         14432  amat
Y                  200x3x3         14432  amat
Z                   50x3x3          3632  amat
fcexrunoutputfilename 1x18            36   char

Print Z amat object :
Z is a 50x3x3 amat[complex single] object
Z(1)=
1.0e+02 *

2.8000 + 0.0000i -0.3200 - 0.0700i -0.5800 - 1.0000i
-0.3200 + 0.0700i 1.6700 + 0.0000i -0.6300 + 0.4800i
-0.5800 + 1.0000i -0.6300 - 0.4800i 2.1500 + 0.0000i

Z(2)=
1.0e+02 *

1.9900 + 0.0000i -1.3900 + 0.0300i 0.7100 + 0.5000i
-1.3900 - 0.0300i 3.2900 + 0.0000i -0.8000 + 0.2600i
0.7100 - 0.5000i -0.8000 - 0.2600i 2.8300 + 0.0000i

...

Z(49)=
1.0e+02 *

3.2600 + 0.0000i 0.8600 - 0.4800i -0.6400 - 1.0400i
0.8600 + 0.4800i 2.2800 + 0.0000i -0.6100 - 0.6500i
-0.6400 + 1.0400i -0.6100 + 0.6500i 2.9600 + 0.0000i

Z(50)=
1.0e+02 *

3.1500 + 0.0000i 0.6600 - 0.5200i 0.7600 - 0.5300i
0.6600 + 0.5200i 2.6000 + 0.0000i 0.0500 - 0.4200i
0.7600 + 0.5300i 0.0500 + 0.4200i 2.1300 + 0.0000i
```

5 Indexing

5.1 Subscripted reference

Let A be a N -by- m -by- n `amat` object.

5.1.1 $A(K,I,J)$

- With K , I , J three 1D-arrays of indices, a $\text{length}(K)$ -by- $\text{length}(I)$ -by- $\text{length}(J)$ `amat` object is returned where $\forall i \in 1:\text{length}(I)$, $\forall j \in 1:\text{length}(J)$, $\forall k \in 1:\text{length}(K)$ the element (i,j) of its k -th matrix

is the element $(I(i), J(j))$ of $K(k)$ -th matrix of A , i.e. with B denoting the output `amat` object:

$$B(k,i,j) \leftarrow A(k, I(i), J(j)).$$

If `length(K)==1`, then the returned object is a `length(I)`-by-`length(J)` matrix such that

$$B(i,j) \leftarrow A(k, I(i), J(j)).$$

- (*experimental*) With K, I, J three M -by- p -by- q `amat` object a M -by- p -by- q `amat` object is returned where $\forall i \in 1:p, \forall j \in 1:q, \forall k \in 1:M$ the element (i, j) of its k -th matrix is the element $(I(k,i,j), J(k,i,j))$ of $K(k,i,j)$ -th matrix of A , i.e. with B denoting the output `amat` object:

$$B(k,i,j) \leftarrow A(K(k,i,j), I(k,i,j), J(k,i,j)).$$

The commands `A(K,I,:)` and `A(K,I,1:end)` are equivalent to `A(K,I,1:n)`.

The commands `A(K,:,J)` and `A(K,:,J)` are equivalent to `A(K,:,1:n)`.

The commands `A(:,I,J)` and `A(1:end,I,J)` are equivalent to `A(1:N,I,J)`.

The commands `A(K,:,:)` and `A(K,1:end,1:end)` are equivalent to `A(K,1:m,1:m)`.

...

5.1.2 `A(K)`

Identically to `A(K,:,:)`.

5.1.3 `A(I,J)`

Identically to `A(:,I,J)`.

In Listing 37, some examples are provided.

Listing 37: : examples of `subsref` method usage

```

N=100;m=2;n=3;
X=fc_amat.random.randi(9,[N,m,n]);
A=X(1,2,2); % A is a scalar
B=X([2,end-1],1:2,[1,3]);
info(B)
C=X(1); % C is a m-by-n matrix
D=X(1:10);
info(D)
E=X(1,2);
info(E)
F=X(1,[1,3]);
info(F)
p=2;q=2;
K=fc_amat.ones(N,p,q).*[1:N]';
I=fc_amat.random.randi(m,[N,p,q]);
J=fc_amat.random.randi(n,[N,p,q]);
sK=1:2:N;
G=X(K(sK),I(sK),J(sK));
info(G)
H=X(I,J);
info(H)
disp('List of some variables: ')
whos A C sK

```

Output

```

B is a 2x2x2 amat[double] object
D is a 10x2x3 amat[double] object
E is a 100x1x1 amat[double] object
F is a 100x1x2 amat[double] object
G is a 50x2x2 amat[double] object
H is a 100x2x2 amat[double] object
List of some variables :

```

Name	Size	Bytes	Class	Attributes
A	1x1	8	double	
C	2x3	48	double	
sK	1x50	400	double	

5.2 Subscripted assignment

Let **A** be a **N**-by-**m**-by-**n** `amat` object.

5.2.1 $A(K,I,J)=B$

- **I**, **J** and **K** are scalars indices, **B** must be a scalar and it is assigned to element (**I**,**J**) of the **K**-th matrix of **A**.
- **I**, **J** and **K** are 1D-arrays of indices. Then three cases are possible
 - **B** is a scalar, then

$$A(k,i,j)=B, \quad \forall i \in I, \forall j \in J, \forall k \in K.$$

- **B** is a $\text{length}(I) \times \text{length}(J)$ matrix, then $\forall k \in 1:\text{length}(K)$ the **K**(**k**)-th matrix of **A** is set to **B**, i.e. $\forall i \in 1:\text{length}(I), \forall j \in 1:\text{length}(J)$,

$$A(K(k),I(i),J(j))=B(i,j).$$

- B is a `length(K)-by-length(I)-by-length(J)` `amat` object then $\forall k \in 1:\text{length}(K)$ the $K(k)$ -th matrix of A is set to k -th matrix of B , i.e. $\forall i \in 1:\text{length}(I), \forall j \in 1:\text{length}(J)$,

$$A(K(k), I(i), J(j)) = B(k, i, j).$$

- I , J and K are M -by- p -by- q `amat` objects of indices

Then three cases are possible

- B is a scalar, then $\forall i \in 1:p, \forall j \in 1:q, \forall k \in 1:M$

$$A(K(k, i, j), I(k, i, j), J(k, i, j)) = B$$

- (*experimental*) B is a M -by- p -by- q `amat` object then $\forall i \in 1:p, \forall j \in 1:q, \forall k \in 1:M$

$$A(K(k, i, j), I(k, i, j), J(k, i, j)) = B(k, i, j)$$

If $\max(I) > m$, $\max(J) > n$ or $\max(K) > N$ then before assignment A is reshaped to fit the new size by setting 0 for missing elements.

5.2.2 $A(K)=B$

Identically to the equivalent commands $A(K, 1:m, 1:n)=B$ or $A(K, :, :)=B$ or $A(K, 1:\text{end}, 1:\text{end})=B$

5.2.3 $A(I, J)=B$

If B is a scalar or a matrix or an `amat` object, this command is equivalent to one of these commands $A(1:N, I, J)=B$ or $A(:, I, J)=B$ or $A(1:\text{end}, I, J)=B$. If B is a N -by-1 array then $\forall k \in 1:N, \forall i \in 1:\text{length}(I), \forall j \in 1:\text{length}(J)$,

$$A(k, I(i), J(j)) = B(k).$$

In Listing 38, some examples are provided.

Listing 38: : examples of `subsasgn` method usage

```
N=100;m=3;n=2;
X=fc_amat.ones(N,m,n,'int32');
X(2,1,2)=3;
X([2,N],1:2,[1,3])=2;
X(1)=-1;
X([2,N])=0;
X(3,3)=1:N;
disp('Print X Amat object :')
X
```

Output

```
Print X amat object :

X =

X is a 100x3x3 amat [int32] object
X(1)=
-1 -1 -1
-1 -1 -1
-1 -1 1

X(2)=
0 0 0
0 0 0
0 0 2

...

X(99)=
1 1 0
1 1 0
1 1 99

X(100)=
0 0 0
0 0 0
0 0 100
```

6 Elementary operations

6.1 Arithmetic operations

The implemented element by element arithmetic operators/methods for `amat` objects are:

- `+` / `plus` , addition
- `+` / `uplus` , unary plus
- `-` / `minus` , subtraction
- `-` / `uminus` , unary minus
- `.*` / `times` , element-wise multiplication
- `./` / `rdivide` , element-by-element right division
- `.\` / `ldivide` , element-by-element left division

Let $\mathbf{A} \in (\mathcal{M}_{m,n}(\mathbb{K}))^N$, (i.e. a N -by- m -by- n `amat` object) we now explain how a generic binary operator, denoted by $\otimes$, act between $\mathbf{A}$ and another input

data. We define four kinds of element by element arithmetic binary operations when $\mathbf{A}$ is the left operand.

1. Let $\mathbf{B} \in (\mathcal{M}_{m,n}(\mathbb{K}))^N$, we have

$$\mathbf{A} \otimes \mathbf{B} \stackrel{\text{def}}{=} \mathbf{C} \in (\mathcal{M}_{m,n}(\mathbb{K}))^N \quad (1)$$

where $\forall k \in \llbracket 1, N \rrbracket$

$$\mathbb{C}_k(i, j) = \mathbb{A}_k(i, j) \otimes \mathbb{B}_k(i, j), \quad \forall i \in \llbracket 1, m \rrbracket, \quad \forall j \in \llbracket 1, n \rrbracket.$$

2. Let $\mathbb{B} \in \mathcal{M}_{m,n}(\mathbb{K})$, we have

$$\mathbf{A} \otimes \mathbb{B} \stackrel{\text{def}}{=} \mathbf{C} \in (\mathcal{M}_{m,n}(\mathbb{K}))^N \quad (2)$$

where $\forall k \in \llbracket 1, N \rrbracket$

$$\mathbb{C}_k(i, j) = \mathbb{A}_k(i, j) \otimes \mathbb{B}(i, j), \quad \forall i \in \llbracket 1, m \rrbracket, \quad \forall j \in \llbracket 1, n \rrbracket.$$

3. Let $\mathbf{B} \in \mathbb{K}^N$, (i.e. a N -by-1 array) we have

$$\mathbf{A} \otimes \mathbf{B} \stackrel{\text{def}}{=} \mathbf{C} \in (\mathcal{M}_{m,n}(\mathbb{K}))^N \quad (3)$$

where $\forall k \in \llbracket 1, N \rrbracket$

$$\mathbb{C}_k(i, j) = \mathbb{A}_k(i, j) \otimes \mathbf{B}(k), \quad \forall i \in \llbracket 1, m \rrbracket, \quad \forall j \in \llbracket 1, n \rrbracket.$$

4. Let $B \in \mathbb{K}$, we have

$$\mathbf{A} \otimes B \stackrel{\text{def}}{=} \mathbf{C} \in (\mathcal{M}_{m,n}(\mathbb{K}))^N \quad (4)$$

where $\forall k \in \llbracket 1, N \rrbracket$

$$\mathbb{C}_k(i, j) = \mathbb{A}_k(i, j) \otimes B, \quad \forall i \in \llbracket 1, m \rrbracket, \quad \forall j \in \llbracket 1, n \rrbracket.$$

When $\mathbf{A}$ is the right operand element by element binary operations can be easily deduced.

In Listing 39, some examples are provided.

Listing 39: : examples of element by element operations

```
N=100; m=2;n=3;
X=fc_amat.ones(N,m,n);
A=X+2;
B=[1:N]' .* X;
M=rand(m,n);
C=M-X;
D=C./(2.*X);
disp('List current variables: ')
whos
disp('Print D amat object: ')
disp(D, 'n', 2)
```

Output

```
List current variables :
Name          Size          Bytes Class  Attributes
A              100x2x3          4832 amat
B              100x2x3          4832 amat
C              100x2x3          4832 amat
D              100x2x3          4832 amat
M               2x3             48 double
N               1x1             8 double
SaveOptions    1x6             673 cell
X              100x2x3          4832 amat
fcexrunoutputfilename 1x12            24 char
m               1x1             8 double
n               1x1             8 double

Print D amat object :
D is a 100x2x3 amat[double] object
D(1)=
-0.0926 -0.4365 -0.1838
-0.0471 -0.0433 -0.4512

D(2)=
-0.0926 -0.4365 -0.1838
-0.0471 -0.0433 -0.4512

...

D(99)=
-0.0926 -0.4365 -0.1838
-0.0471 -0.0433 -0.4512

D(100)=
-0.0926 -0.4365 -0.1838
-0.0471 -0.0433 -0.4512
```

6.2 Relational operators

The implemented element by element relational operators/methods for `amat` objects are:

- `==` / `eq` , equality
- `>=` / `ge` , greater than or equal
- `>` / `gt` , greater than
- `<=` / `le` , less than or equal
- `<` / `lt` , less than
- `~=` / `ne` , inequality

With these binary operators, four kind element by element operations occur. They are the same as those described for the *element by element arithmetic operations*, Section 6.1, and given by (1) to (4) except that the output differs: it is a **logical amat** object.

In Listing 40, some examples are provided.

Listing 40: : examples of relational operators

```

N=100; m=2;n=3;
X=fc_amat.random.randn(N,m,n);
Y=randn(m,n);
Z=randn(N,1);
W=fc_amat.random.randn(N,m,n);
A= X>=0;
info(A)
B= X<Y;
info(B)
C= X==Z;
info(C)
D= X~=W;
disp(D)

```

Output

```

A is a 100x2x3 amat[logical] object
B is a 100x2x3 amat[logical] object
C is a 100x2x3 amat[logical] object
D is a 100x2x3 amat[logical] object
D(1)=
  1  1  1
  1  1  1

D(2)=
  1  1  1
  1  1  1

...

D(99)=
  1  1  1
  1  1  1

D(100)=
  1  1  1
  1  1  1

```

6.3 Logical operations

The implemented logical operators/methods for **amat** objects are:

- **&** / **and** , logical and
- **|** / **or** , logical or
- **~** / **not** , logical not
- **xor** , logical xor
- **all** , ...
- **any** , ...

With the binary operators **and** , **or** , and **xor** four kind element by element operations occur. They are the same as those described for the *element by*

element arithmetic operations, section 6.1, and given by (1) to (4) except that the output differs: it is a **logical amat** object.

In Listing 41, some examples are provided.

Listing 41: : examples of relational operators

```

N=100; m=2;n=3;
X=( fc_amat.random.randi([-2,2],N,m,n) >=0 );
y=( randi([-2,2],m,n) <0 );
w=( randi([-2,2],N,1) <=1 );
A= X & y;
info(A)
B= X | w;
info(B)
C= ~B;
info(C)
D= xor(X,C);
disp(D)

```

Output

```

A is a 100x2x3 amat[logical] object
B is a 100x2x3 amat[logical] object
C is a 100x2x3 amat[logical] object
D is a 100x2x3 amat[logical] object
D(1)=
  1  1  1
  1  1  1

D(2)=
  1  1  1
  1  1  1

...

D(99)=
  0  1  0
  1  0  0

D(100)=
  0  1  1
  1  0  0

```

6.3.1 all method

Let **X** be a **N**-by-**m**-by-**n** **amat** object. The **all** method of **X** return a **N**-by-**1**-by-**1** logical **amat** object such that its *k*-th element (**1**-by-**1** matrix) is **true** (logical 1) if all elements of the *k*-th matrix of **X** are all nonzero.

Syntaxe

```

B=all(X)
B=all(X,dim)

```

Description

B=all(X)

return a **N**-by-**1**-by-**1** logical **amat** object such that **B(k,1,1)** is one (logical **true**) if $\forall i \in [1:m], \forall j \in [1:n], A(k,i,j)$ is nonzero. Otherwise **B(k,1,1)** is zero (logical **false**).

`B=all(X,dim)`

- `dim=1` , along rows of matrices of `X`. Returns a `N-by-1-by-n` logical `amat` object such that `B(k,1,j)` is one (logical `true`) if $\forall i \in [1:m]$, `A(k,i,j)` is nonzero. Otherwise, `B(k,1,j)` is zero (logical `false`).
- `dim=2` , along columns of matrices of `X`. Returns a `N-by-m-by-1` logical `amat` object such that `B(k,i,1)` is one (logical `true`) if $\forall j \in [1:n]$, `A(k,i,j)` is nonzero. Otherwise, `B(k,i,1)` is zero (logical `false`).
- `dim=3` , (default value) , along rows and columns of matrices of `X`. Returns a `N-by-1-by-1` logical `amat` object such that `B(k,1,1)` is one (logical `true`) if $\forall i \in [1:m]$, $\forall j \in [1:n]$, `A(k,i,j)` is nonzero. Otherwise, `B(k,1,1)` is zero (logical `false`).
- `dim=0` , along matrices index of `X`. Returns return a `m-by-n` logical matrix such that `B(i,j)` is one (logical `true`) if $\forall k \in [1:N]$, `A(k,i,j)` is nonzero. Otherwise, `B(i,j)` is zero (logical `false`).

In Listing 42, some examples are provided.

Listing 42: : examples of `all` function usage

```

X=fc_amat.random.rand(100,2,3);
info(X)
A=all(X>0); info(A)
B=all(X>0,1); info(B)
C=all(X>0,2); info(C)
D=all(X>0,0);
fprintf('D is \n'); disp(D)
E=all(all(X>0),0);
fprintf('E is \n'); disp(E)

```

Output

```

X is a 100x2x3 amat[double] object
A is a 100x1x1 amat[logical] object
B is a 100x1x3 amat[logical] object
C is a 100x2x1 amat[logical] object
D is
    1    1    1
    1    1    1

E is
    1

```

6.3.2 any method

Let `X` be a `N-by-m-by-n` `amat` object. The `any` method of `X` return a `N-by-1-by-1` logical `amat` object such that its k -th element (`1-by-1` matrix) is `true` (logical 1) if any of the elements of the k -th matrix of `X` is nonzero.

Syntaxe

```
B=any(X)
B=any(X,dim)
```

Description

```
B=any(X)
```

return a **N-by-1-by-1** logical **amat** object such that **B(k,1,1)** is one (logical **true**) if $\exists i \in [1:m], \exists j \in [1:n], A(k,i,j)$ is nonzero.

```
B=any(X,dim)
```

- **dim=1** , along rows of matrices of **X**. Returns a **N-by-1-by-n** logical **amat** object such that **B(k,1,j)** is one (logical **true**) if $\exists i \in [1:m], A(k,i,j)$ is nonzero. Otherwise, **B(k,1,j)** is zero (logical **false**).
- **dim=2** , along columns of matrices of **X**. Returns a **N-by-m-by-1** logical **amat** object such that **B(k,i,1)** is one (logical **true**) if $\exists j \in [1:n], A(k,i,j)$ is nonzero. Otherwise, **B(k,i,1)** is zero (logical **false**).
- **dim=3** , (default value) , along rows and columns of matrices of **X**. Returns a **N-by-1-by-1** logical **amat** object such that **B(k,1,1)** is one (logical **true**) if $\exists i \in [1:m], \exists j \in [1:n], A(k,i,j)$ is nonzero. Otherwise, **B(k,1,1)** is zero (logical **false**).
- **dim=0** , along matrices index of **X**. Returns return a **m-by-n** logical matrix such that **B(i,j)** is one (logical **true**) if $\exists k \in [1:N], A(k,i,j)$ is nonzero. Otherwise, **B(i,j)** is zero (logical **false**).

In Listing 43, some examples are provided.

Listing 43: : examples of `fc_amat.random.randher` function usage

```
X=fc_amat.random.rand(100,2,3);
info(X)
A=any(X>0); info(A)
B=any(X>0,1); info(B)
C=any(X>0,2); info(C)
D=any(X>0,0);
fprintf('D is\n');disp(D)
E=any(any(X>0),0);
fprintf('E is\n');disp(E)
```

Output

```
X is a 100x2x3 amat[double] object
A is a 100x1x1 amat[logical] object
B is a 100x1x3 amat[logical] object
C is a 100x2x1 amat[logical] object
D is
    1    1    1
    1    1    1

E is
    1
```

7 Elementary mathematical functions

A lot of elementary mathematical functions can be used with `amat` objects. In Listing 44, some examples are provided and complete lists are given thereafter.

Listing 44: : examples of elementary mathematical functions

```
A=fc_amat.random.randiher(10,100,3);
info(A);
X=cos(A);
info(X);
Y=sin(A);
info(Y);
Z=X.^2+Y.^2;
disp('Print Z Amat object: ')
Z
```

Output

```
A is a 100x3x3 amat[complex double] object
X is a 100x3x3 amat[complex double] object
Y is a 100x3x3 amat[complex double] object
Print Z amat object :

Z =

Z is a 100x3x3 amat[complex double] object
Z(1)=
 1.0000 + 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i
 1.0000 - 0.0000i 1.0000 - 0.0000i 1.0000 - 0.0000i
 1.0000 + 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i

Z(2)=
 1.0000 + 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i
 1.0000 - 0.0000i 1.0000 + 0.0000i 1.0000 - 0.0000i
 1.0000 + 0.0000i 1.0000 + 0.0000i 1.0000 - 0.0000i

...

Z(99)=
 1.0000 - 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i
 1.0000 + 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i
 1.0000 - 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i

Z(100)=
 1.0000 + 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i
 1.0000 - 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i
 1.0000 + 0.0000i 1.0000 + 0.0000i 1.0000 + 0.0000i
```

7.1 trigonometric functions

- `sin` , `asin` , `sind` , `asind` , `sinh` , `asinh` for sine functions
- `cos` , `acos` , `cosd` , `acosd` , `cosh` , `acosh` for cosine functions
- `tan` , `atan` , `tand` , `atand` , `tanh` , `atanh` , `atan2` , `atan2d` for tangent functions
- `csc` , `acsc` , `cscd` , `acscd` , `csch` , `acsch` for cosecant functions
- `sec` , `asec` , `secd` , `asecd` , `sech` , `asech` for secant functions
- `cot` , `acot` , `cotd` , `acotd` , `coth` , `acoth` for cotangent functions
- `hypot` , square root of the sum of the squares
- `deg2rad` , `rad2deg` for convert functions

7.2 Exponents and Logarithms

- `exp` , exponential function

- `expm1` , exponential function minus one
- `log` , natural logarithm
- `reallog` , real-valued natural logarithm
- `log1p` , compute `log(1+x)`
- `log10` , base-10 logarithm
- `log2` , base-2 logarithm
- `pow2` , base-2 power
- `nextpow2` , exponent of next higher power of 2
- `realpow` , real-valued power
- `sqrt` , square root
- `realsqrt` , real-valued square root
- `cbrt` , cube root
- `cbrtsqrt` , real-valued cube root
- `nthroot` , real (non-complex) n -th root

7.3 Complex Arithmetic

- `abs` , magnitude
- `arg` , `angle` , argument
- `conj` , complex conjugate
- `imag` , imaginary part
- `real` , real part

7.4 Utility methods

- `ceil` , round toward positive infinity
- `fix` , round toward zero
- `floor` , round toward negative infinity
- `round` , Round to the nearest integer

7.4.1 max method

Let **X** be a **N**-by-**m**-by-**n** **amat** object. The **max** method of **X** return its maximum values.

Syntaxe

```
W = max (X)
W = max (X, [], DIM)
W = max (X, Y)
[W, I] = max (X)
[W, I] = max (X, [], DIM)
[W, I, J] = max (X, [], 3)
```

Description

```
W=max(X)
```

return a **m**-by-**n** matrix such that $W(i,j)$ is the maximum value of $X(:,i,j)$

```
W = max (X, [], dim)
```

- **dim=0** , along the number of matrices of **X**. Same as $W = \max (X)$.
- **dim=1** , along rows of matrices of **X**. Returns a **N**-by-**1**-by-**n** **amat** object such that $W(k,1,j)$ is the maximum value of $X(k,:,j)$.
- **dim=2** , along columns of matrices of **X**. Returns a **N**-by-**m**-by-**1** **amat** object such that $W(k,i,1)$ is the maximum value of $X(k,i,:)$.
- **dim=3** , along rows and columns of matrices of **X**. Returns a **N**-by-**1**-by-**1** **amat** object such that $W(k,1,1)$ is the maximum value of $X(k,:,:)$.

```
W = max (X, Y)
```

Returns a **N**-by-**m**-by-**n** **amat** object such that

- $W(k,i,j)=\max(X(k,i,j),Y(k,i,j))$ if **Y** is a **N**-by-**m**-by-**n** **amat** object,
- $W(k,i,j)=\max(X(k,i,j),Y(i,j))$ if **Y** is a **m**-by-**n** matrix,
- $W(k,i,j)=\max(X(k,i,j),Y(k))$ if **Y** is a **N**-by-**1** or **1**-by-**N** array,
- $W(k,i,j)=\max(X(k,i,j),Y)$ if **Y** is a scalar.

```
[W, K] = max (X)
```

Returns two **m**-by-**n** matrices such that

$$W(i,j)=\max(X(:,i,j)) \text{ and } W(i,j)=X(K(i,j),i,j)$$

```
[W, Idx] = max (X, [], DIM)
```

- if `DIM=0` , command is equivalent to `[W, Idx] = max (X)`,
- if `DIM=1` , returns two `N`-by-1-by-`n` `amat` objects such that

$$W(k,1,j)=\max(X(k, :, j)) \text{ and } W(k,1,j)=X(K, Idx(k,1,j), j),$$

- if `DIM=2` , returns two `N`-by-`m`-by-1 `amat` objects such that

$$W(k,i,1)=\max(X(k, i, :)) \text{ and } W(k,i,1)=X(K, i, Idx(k, i, 1)).$$

```
[W, I, J] = max (X, [], 3)
```

returns three `N`-by-1-by-1 `amat` objects such that

$$W(k,1,1)=\max(X(k, :, :)) \text{ and } W(k,1,1)=X(K, I(k,1,1), J(k,1,1)).$$

In Listing 45, some examples are provided.

Listing 45: : examples of `fc_amat.random.randher` function usage

```
N=3;m=2;n=3;
X=fc_amat.random.randi(9,[N,m,n]);
Y=fc_amat.random.randi(9,[N,m,n]);
disp(X)
W=max(X);
fprintf('W=max(X) \n')
disp(W)
W1=max(X,[],1);
fprintf('W1=max(X,[],1) \n')
disp(W1)
```

Output

```
X is a 3x2x3 amat[double] object
X(1)=
     8     3     9
     9     9     2

X(2)=
     9     5     5
     6     2     4

X(3)=
     2     9     8
     1     9     9

W=max(X) ->
     9     9     9
     9     9     9

W1=max(X,[],1) ->
W1 is a 3x1x3 amat[double] object
W1(1)=
     9
     9
     9

W1(2)=
     9
     5
     5

W1(3)=
     2
     9
     9
```

7.4.2 min method

Let **X** be a **N**-by-**m**-by-**n** **amat** object. The **min** method of **X** return its minimum values.

Syntaxe

```
W = min (X)
W = min (X, [], DIM)
W = min (X, Y)
[W, I] = min (X)
[W, I] = min (X, [], DIM)
[W, I, J] = min (X, [], 3)
```

Description

```
W=min(X)
```

return a **m**-by-**n** matrix such that $W(i,j)$ is the minimum value of $X(:,i,j)$

```
W = min (X, [], dim)
```

- **dim=0** , along the number of matrices of **X**. Same as $W = \min (X)$.
- **dim=1** , along rows of matrices of **X**. Returns a **N**-by-**1**-by-**n** **amat** object such that $W(k,1,j)$ is the minimum value of $X(k,:,j)$.
- **dim=2** , along columns of matrices of **X**. Returns a **N**-by-**m**-by-**1** **amat** object such that $W(k,i,1)$ is the minimum value of $X(k,i,:)$.
- **dim=3** , along rows and columns of matrices of **X**. Returns a **N**-by-**1**-by-**1** **amat** object such that $W(k,1,1)$ is the minimum value of $X(k,:,:)$.

```
W = min (X, Y)
```

Returns a **N**-by-**m**-by-**n** **amat** object such that

- $W(k,i,j)=\min(X(k,i,j),Y(k,i,j))$ if **Y** is a **N**-by-**m**-by-**n** **amat** object,
- $W(k,i,j)=\min(X(k,i,j),Y(i,j))$ if **Y** is a **m**-by-**n** matrix,
- $W(k,i,j)=\min(X(k,i,j),Y(k))$ if **Y** is a **N**-by-**1** or **1**-by-**N** array,
- $W(k,i,j)=\min(X(k,i,j),Y)$ if **Y** is a scalar.

```
[W, K] = min (X)
```

Returns two **m**-by-**n** matrices such that

$$W(i,j)=\min(X(:,i,j)) \text{ and } W(i,j)=X(K(i,j),i,j)$$

$[W, \text{Idx}] = \min(X, [], \text{DIM})$

- if $\text{DIM}=0$, command is equivalent to $[W, \text{Idx}] = \min(X)$,
- if $\text{DIM}=1$, returns two N -by-1-by- n `amat` objects such that

$$W(k,1,j)=\min(X(k,:,j)) \text{ and } \text{Idx}(k,1,j)=X(k,1,j),$$

- if $\text{DIM}=2$, returns two N -by- m -by-1 `amat` objects such that

$$W(k,i,1)=\min(X(k,i,:)) \text{ and } \text{Idx}(k,i,1)=X(k,i,\text{Idx}(k,i,1)).$$

$[W, I, J] = \min(X, [], 3)$

returns three N -by-1-by-1 `amat` objects such that

$$W(k,1,1)=\min(X(k,:,:)) \text{ and } I(k,1,1)=X(k,I(k,1,1),J(k,1,1)).$$

In Listing 46, some examples are provided.

Listing 46: : examples of `fc_amat.random.randher` function usage

```
N=10;m=2;n=3;
X=fc_amat.random.randi(9,[N,m,n]);
disp(X)
W=min(X);
fprintf('W=min(X)_->\n')
disp(W)
W1=min(X,[],1);
fprintf('W1=min(X,[],1)_->\n')
disp(W1)
```

Output

```
X is a 10x2x3 amat[double] object
X(1)=
     8     6     4
     2     7     3

X(2)=
     9     1     4
     9     1     7

...

X(9)=
     9     6     7
     8     9     6

X(10)=
     9     2     7
     9     1     3

W=min(X) ->
     1     1     2
     2     1     2

W1=min(X,[],1) ->
W1 is a 10x1x3 amat[double] object
W1(1)=
     2
     6
     3

W1(2)=
     9
     1
     4

...

W1(9)=
     8
     6
     6

W1(10)=
     9
     1
     3
```

8 Linear algebra

8.1 Linear combination

. Let **X** be a **N**-by-**m**-by-**n** `amat` object, **alpha** and **beta** two scalars. We define four kinds of linear combinations for the Matlab instruction:

$$Z = \text{alpha} * X + \text{beta} * Y \quad (5)$$

where Z be also a N -by- m -by- n `amat` object, and we have $\forall k \in 1:N, \forall i \in 1:m, \forall j \in 1:n$,

$$Z(k,i,j) = \alpha * X(k,i,j) + \begin{cases} \beta * Y(k,i,j) & \text{if } Y \text{ is a } N\text{-by-}m\text{-by-}n \text{ } \text{amat} \text{ object} \\ \beta * Y(i,j) & \text{if } Y \text{ is a } m\text{-by-}n \text{ matrix} \\ \beta * Y(i,j) & \text{if } Y \text{ is a scalar} \\ \beta * Y(k) & \text{if } Y \text{ is a } N\text{-by-}1 \text{ array} \end{cases}$$

In Listing 47, some examples are provided.

Listing 47: : examples of linear combinations	
<pre> N=100;m=2;n=3; X=fc_amat.random.randi(9,[N,m,n]); info(X) Y=fc_amat.random.randi(9,[N,m,n]); info(Y) A=3*X-2*Y; info(A) Y2=randi(9,[m,n]); B=2*Y2-4*X; info(B) C=3*X-1; info(C) Y3=randi(9,[N,1]); D=3*Y3-X; info(D) </pre>	
Output	
<pre> X is a 100x2x3 amat [double] object Y is a 100x2x3 amat [double] object A is a 100x2x3 amat [double] object B is a 100x2x3 amat [double] object C is a 100x2x3 amat [double] object D is a 100x2x3 amat [double] object </pre>	

8.2 Matrix product

We define (and extend) matricial products for `amat` objects by using operator `*` (i.e. `mtimes` method)

$$Z = X * Y \quad (6)$$

where X and/or Y are `amat` objects. Explanations on programming techniques can be found in [1].

We choose to only described this operator when the left operand X is a N -by- m -by- n `amat` object. We can easily deduced results when X is not an `amat` object and Y is an `amat` object.

- With Y a N -by- n -by- p `amat` object (compatible dimensions), instruction (6) defines Z as a N -by- m -by- p `amat` object and is equivalent to the N matricial products

$$Z(k) = X(k) * Y(k), \quad \forall k \in 1:N$$

i.e. $\forall i \in 1:m, \forall j \in 1:p$,

$$Z(k,i,j) = \sum_{r=1}^n X(k,i,r) * Y(k,r,j), \quad \forall k \in 1:N.$$

- With Y a n -by- p matrix (compatible dimensions), instruction (6) defines Z as a N -by- m -by- p `amat` object and is equivalent to the N matricial products

$$Z(k) = X(k) * Y, \quad \forall k \in 1:N$$

i.e. $\forall i \in 1:m, \forall j \in 1:p,$

$$Z(k, i, j) = \sum_{r=1}^n X(k, i, r) * Y(r, j), \quad \forall k \in 1:N.$$

- With Y a N -by-1 1D-array, instruction (6) defines Z as a N -by- m -by- n `amat` object and we have

$$Z(k) = X(k) * Y(k), \quad \forall k \in 1:N$$

i.e. $\forall i \in 1:m, \forall j \in 1:n,$

$$Z(k, i, j) = X(k, i, j) * Y(k), \quad \forall k \in 1:N.$$

- With Y a scalar, instruction (6) defines Z as a N -by- m -by- n `amat` object and we have

$$Z(k) = X(k) * Y, \quad \forall k \in 1:N$$

i.e. $\forall i \in 1:m, \forall j \in 1:n,$

$$Z(k, i, j) = X(k, i, j) * Y, \quad \forall k \in 1:N.$$

In Listing 47, some examples are provided.

Listing 48: : examples of matricial products

```
N=100;m=2;n=4;p=3;
X=fc_amat.random.randi(9,[N,m,n]);
info(X)
Y=fc_amat.random.randi(9,[N,n,p]);
info(Y)
A=X*Y; % <- matricial products
info(A)
X2=randi(9,[m,n]);
B=X2*Y;% <- matricial products
info(B)
Y2=randi(9,[n,p]);
C=X*Y2;% <- matricial products
info(C)
T=C(1)-X(1)*Y2;
fprintf('T is\n')
disp(T)
```

Output

```
X is a 100x2x4 amat [double] object
Y is a 100x4x3 amat [double] object
A is a 100x2x3 amat [double] object
B is a 100x2x3 amat [double] object
C is a 100x2x3 amat [double] object
T is
    0    0    0
    0    0    0
```

8.2.1 Efficiency

For benchmarking purpose the function `fc_amat.benchs.mtimes` can be used and is described in Section 8.2.2. This function uses the `FC-BENCH` Matlab toolbox described in [2] and performs all computational times of this section.

Let $\mathbf{X}$ and $\mathbf{Y}$ be N -by- d -by- d `amat` objects, in Table 2 computational times in seconds of `mtimes(X,Y)` ($\mathbf{X}*\mathbf{Y}$ matricial products) are given. In Figure 1, computational times in seconds for a given N are represented in function of very small values of d .

N	<code>mtimes</code>
200 000	0.130(s)
400 000	0.304(s)
600 000	0.453(s)
800 000	0.556(s)
1 000 000	0.704(s)
5 000 000	5.117(s)

Table 2: Computational times in seconds of `mtimes(X,Y)` ($\mathbf{X}*\mathbf{Y}$ matrix product) where $\mathbf{X}$ and $\mathbf{Y}$ are N -by- d -by- d `amat` objects.

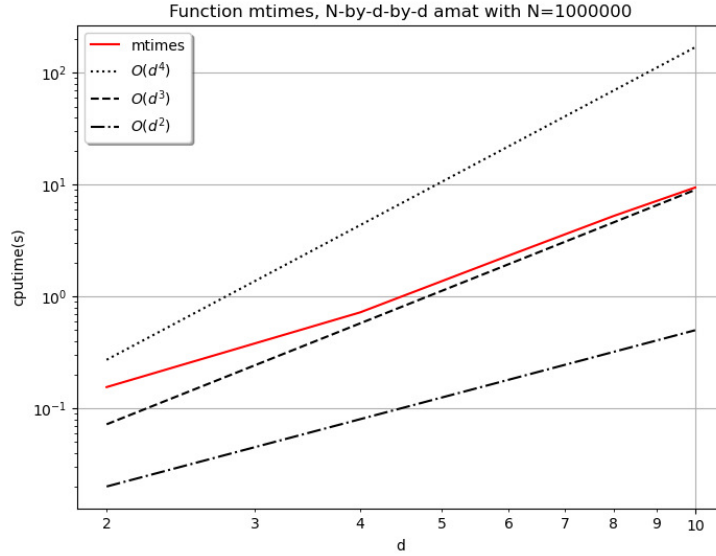


Figure 1: Computational times in seconds of `mtimes(X,Y)` or $\mathbf{X}*\mathbf{Y}$ (matrix product) where $\mathbf{X}$ and $\mathbf{Y}$ are N -by- d -by- d `amat` objects.

8.2.2 Benchmark function

The function `fc_amat.benchs.mtimes` measures performance of matricial products of `amat` objects done by `mtimes(X,Y)` or $\mathbf{X}*\mathbf{Y}$ command. At least one of

the inputs must be an `amat` object. When running this function the matrices orders are fixed and only the number `N` of matrices contained in `amat` objects varies and it is given by a list of values `LN`.

Syntaxe

```
fc_amat.benchs.mtimes(LN)
fc_amat.benchs.mtimes(LN, key, value, ...)
```

Description

```
fc_amat.benchs.mtimes(LN)
```

runs a benchmark of the `mtimes` method of the `amat` class between two `N`-by-2-by-2 `amat` objects for all `N` in `LN`.

```
fc_amat.benchs.mtimes(LN, key, value, ...)
```

Optional key/value pairs arguments are available. `key` can be one of the following strings

- `'d'`, left and right matrices dimension (default `value` is `[2,2]`)
- `'type'`, to set type of left and right operands. `value` is either `'amat'` (`amat` object), `'mat'` (matrix), `'array1d'` (`N`-by-1 1D-array) or `'scalar'` (default `value` is `'amat'`).
- `'class'`, to set classname of left and right operands. Value can be `'double'` (default), `'single'`, `'int32'`, ...
- `'complex'`, if `true` left and right operands are complex (default `value` is `false`).
- `'ld'`, same as `'d'` but only for left operand.
- `'rd'`, same as `'d'` but only for right operand.
- `'ltype'` same as `'type'` but only for left operand.
- `'rtype'` same as `'type'` but only for right operand.
- `'lclass'` same as `'class'` but only for left operand.
- `'rclass'` same as `'class'` but only for right operand.
- `'lcomplex'` same as `'complex'` but only for left operand.
- `'rcomplex'` same as `'complex'` but only for right operand.

In Listings 49 and 50 two examples with outputs are provided.

Listing 49: : Benchmarking `mtimes(X,Y)` with `X` a 3-by-4 matrix and `Y` a N-by-4-by-5 `amat` object

```
LN=10^5*[2:2:10];
fc_amat.benchs.mtimes(LN,'ltype','mat','ld',[3,4],'rd',[4,5]);
```

Output

```
#-----
# computer: ryzen
# system: Ubuntu 22.04.1 LTS (x86_64)
# processor: AMD Ryzen 5 3500U with Radeon Vega Mobile Gfx
# (1 procs/4 cores by proc/2 threads by core)
# RAM: 13.6 Go
# software: Matlab
# release: 2022a
# MaxThreads: 4
#-----
# 1st parameter is :
# -> matrix[double] with (m,n)=(3,4), size=[3 4]
# 2nd parameter is :
# -> amat[double] with (N,nr,nc)=(200000,4,5), size=[200000 4 5]
#-----
#date:2022/12/19 17:50:48
#nbruns:5
#numpy:      i4      f4
#format:     %d      %.3f
#labels:      N      mtimes(s)
200000      0.099
400000      0.201
600000      0.314
800000      0.387
1000000     0.498
```

Listing 50: : Benchmarking `mtimes(X,Y)` where `X` and `Y` are N-by-4-by-4 `amat` object with `complex single` values.

```
LN=10^5*[2:2:10];
fc_amat.benchs.mtimes(LN,'d',[4,4],'complex',true,'class','single', ...
    'info',false);
```

Output

```
#-----
# 1st parameter is :
# -> amat[complex single] with (N,nr,nc)=(200000,4,4), size=[200000 4 4]
# 2nd parameter is :
# -> amat[complex single] with (N,nr,nc)=(200000,4,4), size=[200000 4 4]
#-----
#date:2022/12/19 17:51:15
#nbruns:5
#numpy:      i4      f4
#format:     %d      %.3f
#labels:      N      mtimes(s)
200000      0.168
400000      0.404
600000      0.601
800000      0.709
1000000     0.782
```

8.3 LU Factorization

Let `A` be a N-by-m-by-m `amat` object. The `[L,U,P]=lu(A)` command returns three N-by-m-by-m `amat` objects where `L`, `U` and `P` are respectively a unit lower triangular `amat`, an upper triangular `amat` and a permutation `amat` such that

$$P*A=L*U \text{ or } A=P'*L*U. \quad (7)$$

Here, operator `*` is the `amat` matricial product, i.e.

$$\forall k \in 1:N, \quad P(k) * A(k) = L(k) * U(k).$$

Explanations on programming techniques can be found in [1].

Syntaxe Let A be a N -by- m -by- m `amat` object.

```
[L,U,P]=lu(A)
[L,U,P]=lu(A,type)
```

Description

```
[L,U,P]=lu(A)
```

returns three N -by- m -by- m `amat` objects where L , U and P are respectively a unit lower triangular `amat`, an upper triangular `amat` and a permutation `amat` such that

$$P*A=L*U \text{ or } A=P'*L*U. \quad (8)$$

Here operator $*$ is the `amat` matricial product, i.e.

$$\forall k \in 1:N, \quad P(k)*A(k)=L(k)*U(k).$$

```
[L,U,P]=lu(A,type)
```

- If `type` is `'amat'`, then the command is equivalent to `[L,U,P]=lu(A)`.
- If `type` is `'vector'` or `'matrix'` then, returns the permutation information P as a N -by- m matrix instead of an `amat`. If so, the permutation `amat` object can be build with the `fc_amat.permind2amat(P)` command.

In Listing 51, some examples are provided.

Listing 51: : examples of `lu` method usage

```

A=complex(fc_amat.random.randn(100,3,3),fc_amat.random.randn(100,3,3));
info(A)
[L,U,P]=lu(A);
info(L);info(U);info(P);
E=P*A-L*U;
disp(E);

```

Output

```

A is a 100x3x3 amat[complex double] object
L is a 100x3x3 amat[complex double] object
U is a 100x3x3 amat[complex double] object
P is a 100x3x3 amat[double] object
E is a 100x3x3 amat[complex double] object
E(1)=
 1.0e-15 *

 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.1110 - 0.0069i 0.0000 + 0.0000i 0.0000 + 0.0000i

E(2)=
 1.0e-15 *

 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i 0.1110 + 0.0000i -0.2220 + 0.0000i
 0.0000 + 0.0000i 0.0555 + 0.0000i 0.0278 + 0.0278i

...

E(99)=
 1.0e-15 *

 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i -0.1110 + 0.0278i 0.0000 + 0.0000i
 0.0000 + 0.0000i -0.0278 + 0.0000i 0.0000 + 0.0000i

E(100)=
 1.0e-15 *

 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 - 0.2220i 0.0000 - 0.0833i 0.0000 + 0.0000i

```

8.3.1 Efficiency

For benchmarking purpose the function `fc_amat.benchs.lu` can be used and is described in Section 8.3.2. This function uses the `FC-BENCH` Matlab toolbox described in [2] and performs all computational times of this section.

Let A be a N -by- d -by- d `amat` object, in Table 3 computational times in seconds of `[L,U,P]=lu(A)` are given. In Figure 2, computational times in seconds for a given N are represented in function of very small values of d .

N	$d=2$	$d=4$	$d=6$	$d=8$	$d=10$
200 000	0.080(s)	0.213(s)	0.650(s)	1.252(s)	1.981(s)
400 000	0.123(s)	0.525(s)	1.275(s)	2.217(s)	4.062(s)
600 000	0.162(s)	0.818(s)	1.911(s)	3.686(s)	6.059(s)
800 000	0.220(s)	1.073(s)	2.675(s)	4.770(s)	8.623(s)
1 000 000	0.295(s)	1.338(s)	3.411(s)	6.521(s)	10.726(s)

Table 3: Computational times in seconds of `[L,U,P]=lu(A)` where A is a N -by- d -by- d `amat` object.

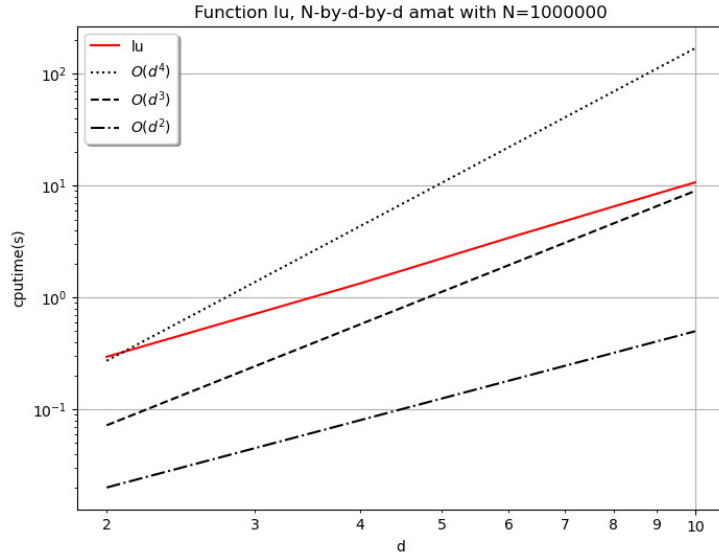


Figure 2: Computational times in seconds of `[L,U,P]=lu(A)` where `A` is a `N-by-d-by-d amat` object.

8.3.2 Benchmark function

The function `fc_amat.benchs.lu` measures performance of LU factorization `[L,U,P]=lu(A)` where the input `A` is a `N-by-d-by-d amat` object. When running this function the `d` value is fixed, the number `N` varies and it is given by a list of values `LN`.

Syntaxe

```
fc_amat.benchs.lu(LN)
fc_amat.benchs.lu(LN,key,value,...)
```

Description

```
fc_amat.benchs.lu(LN)
```

runs a benchmark of the `lu` method on a `N-by-2-by-2 amat` object for all `N` in `LN`.

```
fc_amat.benchs.lu(LN,key,value,...)
```

Optional key/value pairs arguments are available and can modify the input `N-by-d-by-d amat` object of the `lu` function. `key` can be one of the following strings

- `'d'`, to set `d` (default `value` is `2`)

- `'class'`, to set classname of the input `amat` object. Value can be `'double'` (default) or `'single'`.
- `'complex'`, if `true` the input `amat` object is complex (default value is `false`).

In Listings 52 and 53 two examples with outputs are provided.

Listing 52: : Benchmarking `[L,U,P]=lu(A)` with `A` a `N`-by-4-by-4 matrix `amat` object

```
LN=10^5*[2:2:10];
fc_amat.benchs.lu(LN,'d',4);
```

Output

```
#-----
#   computer: ryzen
#   system: Ubuntu 22.04.1 LTS (x86_64)
#   processor: AMD Ryzen 5 3500U with Radeon Vega Mobile Gfx
#             (1 procs/4 cores by proc/2 threads by core)
#   RAM: 13.6 Go
#   software: Matlab
#   release: 2022a
#   MaxThreads: 4
#-----
# input parameter is :
# -> amat[double] with (N,nr,nc)=(200000,4,4), size=[200000 4    4]
#-----
#date:2022/12/19 18:10:35
#nbruns:5
#numpy:      i4      f4      f4
#format:      %d    %.3f    %.3e
#labels:      N    lu(s)    Error[0]
200000      0.304    1.388e-15
400000      0.591    2.304e-15
600000      0.813    1.985e-15
800000      1.202    2.415e-15
1000000     1.347    2.776e-15
```

Listing 53: : Benchmarking `[L,U,P]=lu(A)` where `A` is `N`-by-3-by-3 `amat` object with `complex single` values.

```
LN=10^5*[2:2:10];
fc_amat.benchs.lu(LN,'d',3,'complex',true,'class','single', ...
'info',false);
```

Output

```
#-----
# input parameter is :
# -> amat[complex single] with (N,nr,nc)=(200000,3,3), size=[200000 3    3]
#-----
#date:2022/12/19 18:11:21
#nbruns:5
#numpy:      i4      f4      f4
#format:      %d    %.3f    %.3e
#labels:      N    lu(s)    Error[0]
200000      0.148    8.525e-07
400000      0.356    1.035e-06
600000      0.563    9.562e-07
800000      0.758    9.058e-07
1000000     0.858    8.937e-07
```

8.4 Cholesky Factorization

The `chol(A)` command returns the positive Cholesky factorization of symmetric (or hermitian) positive definite `amat` object `A` as a upper triangular `amat` object with strictly positive diagonal entries. Explanations on programming techniques can be found in [1].

Syntaxe Let A be a N -by- d -by- d symmetric (or hermitian) positive definite `amat` object.

```
B=chol(A)
B=chol(A,type)
```

Description

```
B=chol(A)
```

returns the positive Cholesky factorization of A as a N -by- d -by- d upper triangular `amat` object B with strictly positive diagonal entries such that

$$A=B' * B \quad (9)$$

Here, operator $*$ is the `amat` matricial product, i.e.

$$\forall k \in 1:N, \quad A(k)=B(k)' * B(k) .$$

```
B=chol(A,type)
```

- If `type` is `'upper'` , then the command is equivalent to `B=chol(A)` .
- If `type` is `'lower'` , then B is a N -by- d -by- d lower triangular `amat` object with strictly positive diagonal entries such that

$$A=B * B' \quad (10)$$

Here, operator $*$ is the `amat` matricial product, i.e.

$$\forall k \in 1:N, \quad A(k)=B(k) * B(k)' .$$

In Listing 54, some examples are provided.

Listing 54: : examples of `chol` method usage

```

A=fc_amat.random.randnherpd(100,3);
info(A)
B=chol(A);
info(B);
E=A-B'*B;
disp(E);

```

Output

```

A is a 100x3x3 amat[complex double] object
B is a 100x3x3 amat[complex double] object
E is a 100x3x3 amat[complex double] object
E(1)=
 1.0e-14 *

 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i 0.3553 + 0.0000i -0.1776 + 0.0000i
 0.0000 + 0.0000i -0.1776 + 0.0000i 0.3553 + 0.0000i

E(2)=
 1.0e-14 *

-0.3553 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i

...

E(99)=
 1.0e-14 *

-0.3553 + 0.0000i 0.0000 + 0.0000i 0.0000 + 0.0000i
 0.0000 + 0.0000i 0.0000 + 0.0000i 0.0000 - 0.0444i
 0.0000 + 0.0000i 0.0000 + 0.0444i -0.3553 + 0.0000i

E(100)=
 1.0e-14 *

 0.0000 + 0.0000i 0.0000 - 0.1776i 0.0000 - 0.0028i
 0.0000 + 0.1776i 0.0000 + 0.0000i 0.0000 + 0.1776i
 0.0000 + 0.0028i 0.0000 - 0.1776i 0.0000 + 0.0000i

```

8.4.1 Efficiency

For benchmarking purpose the function `fc_amat.benchs.chol` can be used and is described in Section 8.4.2. This function uses the **FC-BENCH** Matlab toolbox described in [2] and performs all computational times of this section.

Let A be a N -by- d -by- d symmetric (or hermitian) positive definite `amat` object, in Table 4 computational times in seconds of `B=chol(A)` are given. In Figure 3, computational times in seconds for a given N are represented in function of very small values of d .

N	$d=2$	$d=4$	$d=6$	$d=8$	$d=10$
200 000	0.006(s)	0.021(s)	0.052(s)	0.118(s)	0.217(s)
400 000	0.009(s)	0.047(s)	0.139(s)	0.245(s)	0.459(s)
600 000	0.014(s)	0.084(s)	0.221(s)	0.420(s)	0.828(s)
800 000	0.019(s)	0.115(s)	0.258(s)	0.618(s)	0.993(s)
1 000 000	0.026(s)	0.145(s)	0.378(s)	0.781(s)	1.319(s)

Table 4: Computational times in seconds of `B=chol(A)` where A is a N -by- d -by- d symmetric positive definite `amat` object.

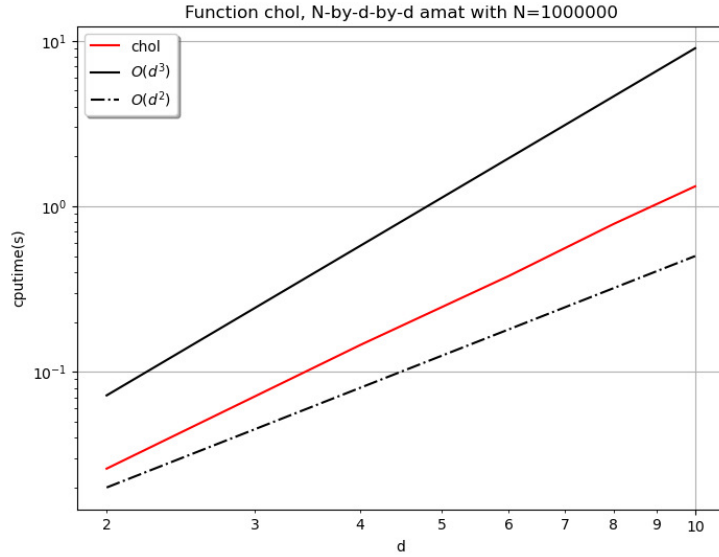


Figure 3: Computational times in seconds of `B=chol(A)` where `A` is a `N`-by-`d`-by-`d` symmetric positive definite `amat` object.

8.4.2 Benchmark function

The function `fc_amat.benchs.chol` measures performance of Cholesky factorization `B=chol(A)` where the input `A` is a `N`-by-`d`-by-`d` symmetric (or hermitian) positive definite `amat` object. When running this function the `d` value is fixed, the number `N` varies and it is given by a list of values `LN`.

Syntaxe

```
fc_amat.benchs.chol(LN)
fc_amat.benchs.chol(LN,key,value,...)
```

Description

```
fc_amat.benchs.chol(LN)
```

runs a benchmark of the `chol` method on a `N`-by-2-by-2 symmetric positive definite `amat` object for all `N` in `LN`.

```
fc_amat.benchs.chol(LN,key,value,...)
```

Optional key/value pairs arguments are available and can modify the input `N`-by-`d`-by-`d` `amat` object of the `chol` function. `key` can be one of the following strings

- `'d'`, to set `d` (default `value` is 2)

- `'kind'`, to set the kind of the square output `amat` object. If `value` is `'lower'`, then the output is a lower triangular `amat` object with strictly positive diagonal entries. Default `value` is `'upper'`. `d` (default `value` is `2`)
- `'class'`, to set classname of the input `amat` object. Value can be `'double'` (default) or `'single'`.
- `'complex'`, if `true` the input `amat` object is Hermitian positive definite (default `value` is `false`).

In Listings 55 and 56 two examples with outputs are provided.

Listing 55: : Benchmarking `B=chol(A)` with `A` a `N`-by-4-by-4 matrix `amat` object

```
LN=10^5*[2:2:10];
fc_amat.benchs.chol(LN,'d',4,'kind','lower');
```

Output

```
#-----
# computer: ryzen
# system: Ubuntu 22.04.1 LTS (x86_64)
# processor: AMD Ryzen 5 3500U with Radeon Vega Mobile Gfx
# (1 procs/4 cores by proc/2 threads by core)
# RAM: 13.6 Go
# software: Matlab
# release: 2022a
# MaxThreads: 4
#-----
# Symmetric Positive Definite matrices
# -> amat[double] with (N,m,n)=(N,4,4)
# Error function: @(X)max(norm(X*X'-A))+all(~istrl(X),0)
#-----
# Benchmarking command: @(A) chol(A,'lower');
#-----
#date:2022/12/19 18:18:30
#nbruns:5
#numpy:      i4      f4      f4
#format:      %d      %.3f      %.3e
#labels:      N chol(s) Error[0]
200000      0.022  2.132e-14
400000      0.054  2.842e-14
600000      0.086  2.842e-14
800000      0.114  3.197e-14
1000000     0.120  3.197e-14
```

Listing 56: : Benchmarking `B=chol(A)` where `A` is `N`-by-3-by-3 `amat` object with `complex single` vacholes.

```
LN=10^5*[2:2:10];
fc_amat.benchs.chol(LN,'d',3,'complex',true,'class','single', ...
'info',false);
```

Output

```
#-----
# Hermitian Positive Definite matrices
# -> amat[complex single] with (N,m,n)=(N,3,3)
# Error function: @(X)max(norm(X'*X-A))+all(~istriu(X),0)
#-----
# Benchmarking command: @(A) chol(A,'upper');
#-----
#date:2022/12/19 18:18:51
#nbruns:5
#numpy:      i4      f4      f4
#format:      %d      %.3f      %.3e
#labels:      N chol(s) Error[0]
200000      0.050  1.024e-05
400000      0.100  1.157e-05
600000      0.113  1.141e-05
800000      0.204  1.257e-05
1000000     0.253  1.188e-05
```

8.5 Determinants

The `det(A)` command returns determinants of the matrices of the square `amat` object. Explanations on programming techniques can be found in [1].

Syntaxe Let `A` be a `N-by-d-by-d amat` object.

```
D=det(A)
D=det(A,'select',value)
```

Description

```
D=det(A)
```

returns determinants of the matrices of `A` as a `N-by-1-by-1 amat` object `D` such that

$$\forall k \in 1:N, \quad D(k)=\det(A(k)) .$$

```
D=det(A,'select',value)
```

when `value` is

- `'lu'` , uses LU factorizations.
- `'laplace'` , uses vectorized Laplace expansion.
- `'auto'` (default), uses vectorized Laplace expansion for `d<=5` and LU factorization otherwise.

In Listing 57, some examples are provided.

Listing 57: : examples of `det` method usage

```
A=complex(fc_amat.random.randn(100,3),fc_amat.random.randn(100,3));
info(A)
D1=det(A);
info(D1);
D2=det(A,'select','lu');
info(D2);
D3=det(A,'select','laplace');
info(D3);
E=abs(D1-D2)+abs(D1-D3);
disp(E)
```

Output

```
A is a 100x3x3 amat[complex double] object
D1 is a 100x1x1 amat[complex double] object
D2 is a 100x1x1 amat[complex double] object
D3 is a 100x1x1 amat[complex double] object
E is a 100x1x1 amat[double] object
E(1)=
    4.0030e-16

E(2)=
    7.8505e-16

...

E(99)=
    6.2804e-16

E(100)=
    2.5121e-15
```

8.5.1 Efficiency

For benchmarking purpose the function `fc_amat.benchs.det` can be used and is described in Section 8.5.2. This function uses the `FC-BENCH` Matlab toolbox described in [2] and performs all computational times of this section.

Let $\mathbf{A}$ be a N -by- d -by- d `amat` object, in Table 5 computational times in seconds of $\mathbf{B}=\text{det}(\mathbf{A})$ are given. In Figure 4, computational times in seconds for a given N are represented in function of very small values of d .

N	$d=2$	$d=4$	$d=6$	$d=8$	$d=10$
200 000	0.063(s)	0.242(s)	0.596(s)	1.193(s)	1.943(s)
400 000	0.084(s)	0.554(s)	1.271(s)	2.400(s)	3.859(s)
600 000	0.132(s)	0.835(s)	1.521(s)	3.671(s)	6.224(s)
800 000	0.229(s)	0.859(s)	2.396(s)	5.076(s)	8.145(s)
1 000 000	0.310(s)	1.369(s)	3.095(s)	6.188(s)	10.579(s)

Table 5: Computational times in seconds of $\mathbf{B}=\text{det}(\mathbf{A})$ where $\mathbf{A}$ is a N -by- d -by- d `amat` object.

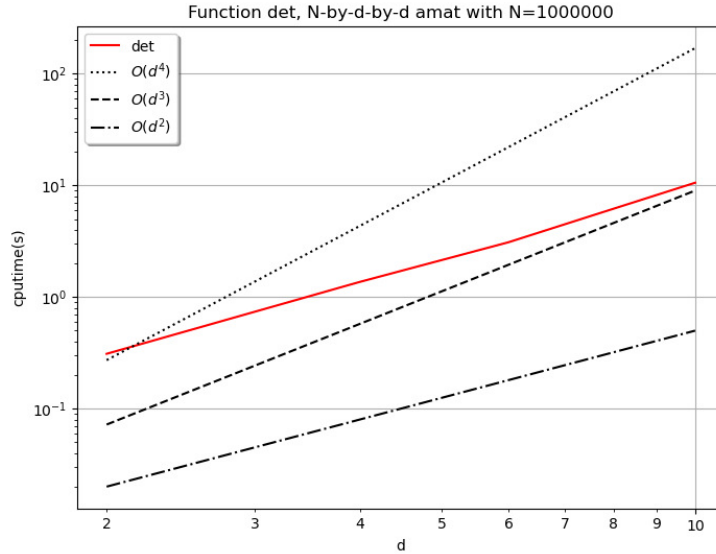


Figure 4: Computational times in seconds of $\mathbf{B}=\text{det}(\mathbf{A})$ where $\mathbf{A}$ is a N -by- d -by- d `amat` object.

8.5.2 Benchmark function

The function `fc_amat.benchs.det` measures performance of $\mathbf{B}=\text{det}(\mathbf{A})$ where the input $\mathbf{A}$ is a N -by- d -by- d `amat` object. When running this function the d value is fixed, the number N varies and it is given by a list of values LN .

Syntaxe

```
fc_amat.benchs.det(LN)
fc_amat.benchs.det(LN,key,value,...)
```

Description

```
fc_amat.benchs.det(LN)
```

runs a benchmark of the `det` method on a `N`-by-2-by-2 `amat` object for all `N` in `LN`.

```
fc_amat.benchs.det(LN,key,value,...)
```

Optional key/value pairs arguments are available and can modify the input `N`-by-`d`-by-`d` `amat` object of the `det` function. `key` can be one of the following strings

- `'d'`, to set `d` (default `value` is `2`)
- `'select'`, to set the `'select'` option of the `'det'` function: `value` can be `'lu'` (default), `'laplace'` or `'auto'`.
- `'class'`, to set classname of the input `amat` object. Value can be `'double'` (default) or `'single'`.
- `'complex'`, if `true` the input `amat` object is complex (default `value` is `false`).

In Listings 58 and 59 two examples with outputs are provided.

Listing 58: : Benchmarking `D=det(A)` with `A` a `N`-by-4-by-4 matrix `amat` object

```
LN=10^5*[2:2:10];
fc_amat.benchs.det(LN,'d',4,'select','lu');
```

Output

```
#-----
#   computer: ryzen
#   system: Ubuntu 22.04.1 LTS (x86_64)
#   processor: AMD Ryzen 5 3500U with Radeon Vega Mobile Gfx
#             (1 procs/4 cores by proc/2 threads by core)
#   RAM: 13.6 Go
#   software: Matlab
#   release: 2022a
#   MaxThreads: 4
#-----
# input parameter for N=200000 is :
# -> amat[double] with (N,nr,nc)=(200000,4,4), size=[200000 4    4]
#-----
# Benchmarking command: @(A) det(A,'select','lu');
#-----
#date:2022/12/19 18:34:23
#nbruns:5
#numpy:      i4      f4
#format:     %d      %.3f
#labels:     N      det(s)
#           200000    0.284
#           400000    0.545
#           600000    0.678
#           800000    1.086
#          1000000    1.326
```

Listing 59: : Benchmarking $B=\det(A)$ where A is N -by-3-by-3 `amat` object with `complex single` vadetes.

```
LN=10^5*[2:2:10];
fc_amat.benchs.det(LN,'d',3,'complex',true,'class','single', ...
'info',false);
```

Output

```
#-----
# input parameter for N=200000 is :
# -> amat[complex single] with (N,nr,nc)=(200000,3,3), size=[200000 3    3]
#-----
# Benchmarking command: @(A) det(A,'select','lu');
#-----
#date:2022/12/19 18:35:00
#nbruns:5
#numpy:      i4      f4
#format:      %d      %.3f
#labels:      N      det(s)
           200000    0.222
           400000    0.357
           600000    0.573
           800000    0.730
          1000000    0.885
```

8.6 Solving particular linear systems

There are three functions to solve linear systems $A \cdot X = B$ where A is a particular (regular) `amat` object.

- $X = \text{solvetriu}(A, B)$, if A is an upper triangular `amat` object.
- $X = \text{solvetril}(A, B)$, if A is a lower triangular `amat` object.
- $X = \text{solvediag}(A, B)$, if A is a diagonal `amat` object.

Explanations on programming techniques can be found in [1]. We only describe the `solvetriu` function because the two others are used similarly.

The $X = \text{solvetriu}(A, B)$ command returns solutions of the linear systems $A \cdot X = B$ where A is a regular upper triangular `amat` object. If A is not upper triangular, then X is solution of $\text{triu}(A) \cdot X = B$.

Description

$X = \text{solvetriu}(A, B)$

The input A supposes to be a N -by- d -by- d regular upper triangular `amat` object and B is either a N -by- d -by- n `amat` object or a d -by- n matrix. Then, the output X is the N -by- d -by- n `amat` object such that

$$\forall k \in 1:N, \quad A(k) \cdot X(k) = \begin{cases} B(k) & \text{if } B \text{ is an } \text{amat} \text{ object} \\ B & \text{if } B \text{ is a matrix} \end{cases}.$$

In Listing 60, some examples are provided.

Listing 60: : examples of `solvetriu` method usage

```
N=100; d=3;
A=fc_amat.random.randtriu(N,d);
info(A)
B1=fc_amat.random.randn(N,d,4);
info(B1)
X1=solvetriu(A,B1);
info(X1)
fprintf('Max. of errors in Inf. norm: %.4e\n',max(norm(A*X1-B1)))
B2=randn(d,1);
X2=solvetriu(A,B2);
info(X2)
E2=A*X2-B2;
disp(E2)
```

Output

```
A is a 100x3x3 amat[double] object
B1 is a 100x3x4 amat[double] object
X1 is a 100x3x4 amat[double] object
Max. of errors in Inf. norm: 1.3822e-14
X2 is a 100x3x1 amat[double] object
E2 is a 100x3x1 amat[double] object
E2(1)=
 1.0e-15 *

-0.1110
      0
      0

E2(2)=
 1.0e-15 *

 0.1665
 0.2220
      0

...

E2(99)=
 1.0e-15 *

 0.4996
      0
      0

E2(100)=
 1.0e-15 *

-0.6106
      0
      0
```

8.6.1 Efficiency

For benchmarking purpose the function `fc_amat.benchs.solvetriu` can be used and is described in Section 8.6.2. This function uses the **FC-BENCH** Matlab toolbox described in [2] and performs all computational times of this section.

Let A be a N -by- d -by- d regular triangular upper `amat` object and B be a N -by- d -by-1 `amat` object. In Table 6 computational times in seconds of $X=\text{solvetriu}(A,B)$ are given. In Figure 5, computational times in seconds for a given N are represented in function of very small values of d .

8.6.2 Benchmark function

The function `fc_amat.benchs.solvetriu` measures performance of $X=\text{solvetriu}(A,B)$ where the input A is a N -by- d -by- d regular triangular upper `amat` object and

N	<code>solvetriu</code>	Error
200 000	0.014(s)	$6.2170e - 15$
400 000	0.027(s)	$5.9950e - 15$
600 000	0.040(s)	$7.6610e - 15$
800 000	0.060(s)	$6.8830e - 15$
1 000 000	0.075(s)	$1.1770e - 14$
5 000 000	0.525(s)	$1.2550e - 14$

Table 6: Computational times in seconds of $X=\text{solvetriu}(A,B)$ where A is a N -by- d -by- d `amat` object and B is a N -by- d -by-1 `amat` object with $d=4$.

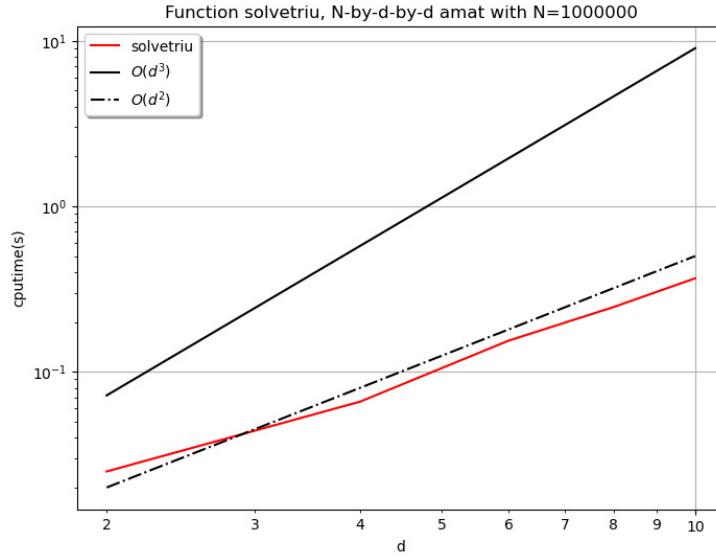


Figure 5: Computational times in seconds of $X=\text{solvetriu}(A,B)$ where A is a N -by- d -by- d `amat` object and B is a N -by- d -by-1 `amat` object.

B is either a **N**-by-**d**-by-**n** **amat** object or a **d**-by-**n** matrix. When running this function the **d** and **n** value are fixed, the number **N** varies and it is given by a list of values **LN**.

Syntaxe

```
fc_amat.benchs.solvetriu(LN)
fc_amat.benchs.solvetriu(LN,key,value,...)
```

Description

```
fc_amat.benchs.solvetriu(LN)
```

runs a benchmark of the **X=solvetriu(A,B)** command where **A** is a **N**-by-2-by-2 regular triangular upper **amat** object and **B** is a **N**-by-2-by-1 **amat** object for all **N** in **LN**. So, by default **d=2** and **n=1**.

```
fc_amat.benchs.solvetriu(LN,key,value,...)
```

Optional key/value pairs arguments are available and can modify inputs of the **solvetriu** function. **key** can be one of the following strings

- **'d'**, to set **d** (default **value** is **2**)
- **'n'**, to set **n** (default **value** is **1**)
- **'rhstype'**, to set the kind of **B** : **'amat'** (default) for **amat** object and **'mat'** for matrix
- **'class'**, to set classname of the two inputs. Value can be **'double'** (default) or **'single'**.
- **'complex'**, if **true** the inputs are complex (default **value** is **false**).
- **'a'**, to set the lower bound of the interval of the uniform distribution used to generate input data (default **value** is **0.5**).
- **'b'**, to set **b** the upper bound of the interval of the uniform distribution used to generate input data (default **value** is **2**).

In Listings 61 and 62 two examples with outputs are provided.

Listing 61: : Benchmarking `X=solvetriu(A,B)` with `A` a `N`-by-4-by-4 matrix `amat` object and `B` a `N`-by-4-by-5 matrix `amat` object.

```
LN=10^5*[2:2:10];
fc_amat.benchs.solvetriu(LN,'d',4,'n',5, 'rhstype','mat');
```

Output

```
#-----
# computer: ryzen
# system: Ubuntu 22.04.1 LTS (x86_64)
# processor: AMD Ryzen 5 3500U with Radeon Vega Mobile Gfx
# (1 procs/4 cores by proc/2 threads by core)
# RAM: 13.6 Go
# software: Matlab
# release: 2022a
# MaxThreads: 4
#-----
# 1st parameter is :
# -> amat[double] with (N,m,n)=(N,4,4)
# containing upper triangular matrices
# 2nd parameter is :
# -> matrix[double] with (m,n)=(4,5), size=[4 5]
# Error function: @(X)max(norm(A*X-B))
#-----
# Benchmarking command: @(A,B) solvetriu(A,B);
#-----
#date:2022/12/19 18:37:15
#nbruns:5
#numpy:      i4      f4      f4
#format:     %d      %.3f    %.3e
#labels:      N solvetriu(s) Error[0]
200000      0.057  7.161e-15
400000      0.131  2.526e-14
600000      0.192  6.505e-15
800000      0.234  2.337e-14
1000000     0.303  1.554e-14
```

Listing 62: : Benchmarking `X=solvetriu(A,B)` where `A` is `N`-by-3-by-3 `amat` object and `B` is `N`-by-3-by-1 `amat` object with both `complex single` values.

```
LN=10^5*[2:2:10];
fc_amat.benchs.solvetriu(LN,'d',3,'complex',true,'class','single', ...
    'info',false);
```

Output

```
#-----
# 1st parameter is :
# -> amat[complex single] with (N,m,n)=(N,3,3)
# containing upper triangular matrices
# 2nd parameter is :
# -> amat[complex single] with (N,nr,nc)=(200000,3,1), size=[200000 3 1]
# Error function: @(X)max(norm(A*X-B))
#-----
# Benchmarking command: @(A,B) solvetriu(A,B);
#-----
#date:2022/12/19 18:37:36
#nbruns:5
#numpy:      i4      f4      f4
#format:     %d      %.3f    %.3e
#labels:      N solvetriu(s) Error[0]
200000      0.024  3.198e-06
400000      0.038  1.862e-06
600000      0.071  2.282e-06
800000      0.101  2.102e-06
1000000     0.124  2.188e-06
```

8.7 Solving linear systems

The `X=mldivide(A,B)` or `X=A\B` commands return solutions of the linear systems $A \cdot X = B$ where `A` is a regular `amat` object. Explanations on programming techniques can be found in [1].

Description

`X=mldivide(A,B)` or `X=A\B`

The input `A` supposes to be a `N`-by-`d`-by-`d` regular `amat` object and `B` is either a `N`-by-`d`-by-`n` `amat` object or a `d`-by-`n` matrix. Then, the output `X` is the `N`-by-`d`-by-`n` `amat` object such that

$$\forall k \in 1:N, \quad A(k)*X(k) = \begin{cases} B(k) & \text{if } B \text{ is an } \text{amat} \text{ object} \\ B & \text{if } B \text{ is a matrix} \end{cases}.$$

In Listing 63, some examples are provided.

Listing 63: : examples of `mldivide` method operator usage

```
N=100; d=3;
A=fc_amat.random.randnsdd(N,d);
info(A)
B1=fc_amat.random.randn(N,d,4);
info(B1)
X1=mldivide(A,B1); % using function
info(X1)
fprintf('Max. of errors in Inf. norm: %.4e\n',max(norm(A*X1-B1)))
B2=randn(d,1);
X2=A\B2; % using operator
info(X2)
E2=A*X2-B2;
disp(E2)
```

Output

```
A is a 100x3x3 amat[double] object
B1 is a 100x3x4 amat[double] object
X1 is a 100x3x4 amat[double] object
Max. of errors in Inf. norm: 3.4417e-15
X2 is a 100x3x1 amat[double] object
E2 is a 100x3x1 amat[double] object
E2(1)=
    1.0e-15 *

    0.0139
   -0.1110
         0

E2(2)=
    1.0e-16 *

    0.4163
         0
   -0.2082

...

E2(99)=
    1.0e-15 *

   -0.0139
   -0.1110
   -0.0486

E2(100)=
    1.0e-16 *

   -0.1388
         0
   -0.2082
```

8.7.1 Efficiency

For benchmarking purpose the function `fc_amat.benchs.mldivide` can be used and is described in Section 8.7.2. This function uses the `FC-BENCH` Matlab

toolbox described in [2] and performs all computational times of this section.

Let A be a N -by- d -by- d regular triangular upper `amat` object and B be a N -by- d -by-1 `amat` object. In Table 7 computational times in seconds of $X=\text{mldivide}(A,B)$ are given. In Figure 6, computational times in seconds for a given N are represented in function of very small values of d .

N	$d=2$	$d=4$	$d=6$	$d=8$	$d=10$
200 000	0.115(s)	0.260(s)	0.749(s)	1.334(s)	1.995(s)
400 000	0.180(s)	0.548(s)	1.414(s)	2.716(s)	4.591(s)
600 000	0.225(s)	1.033(s)	2.285(s)	4.325(s)	7.273(s)
800 000	0.242(s)	1.249(s)	3.209(s)	5.853(s)	9.810(s)
1 000 000	0.384(s)	1.716(s)	4.334(s)	7.460(s)	11.574(s)

Table 7: Computational times in seconds of $X=\text{mldivide}(A,B)$ where A is a N -by- d -by- d `amat` object and B is a N -by- d -by-1 `amat` object.

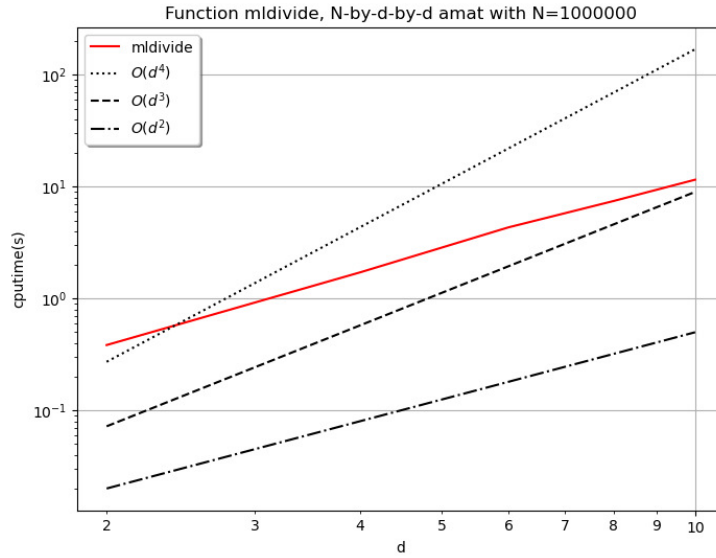


Figure 6: Computational times in seconds of $X=\text{mldivide}(A,B)$ where A is a N -by- d -by- d `amat` object and B is a N -by- d -by-1 `amat` object.

8.7.2 Benchmark function

The function `fc_amat.benchs.mldivide` measures performance of $X=\text{mldivide}(A,B)$ where the input A is a N -by- d -by- d regular triangular upper `amat` object and B is either a N -by- d -by- n `amat` object or a d -by- n matrix. When running this function the d and n value are fixed, the number N varies and it is given by a list of values LN .

Syntaxe

```
fc_amat.benchs.mldivide(LN)
fc_amat.benchs.mldivide(LN,key,value,...)
```

Description

```
fc_amat.benchs.mldivide(LN)
```

runs a benchmark of the `X=mldivide(A,B)` command where `A` is a `N`-by-2-by-2 regular triangular upper `amat` object and `B` is a `N`-by-2-by-1 `amat` object for all `N` in `LN`. So, by default `d=2` and `n=1`.

```
fc_amat.benchs.mldivide(LN,key,value,...)
```

Optional key/value pairs arguments are available and can modify inputs of the `mldivide` function. `key` can be one of the following strings

- `'d'`, to set `d` (default `value` is `2`)
- `'n'`, to set `n` (default `value` is `1`)
- `'rhstype'`, to set the kind of `B`: `'amat'` (default) for `amat` object and `'mat'` for matrix
- `'class'`, to set classname of the two inputs. Value can be `'double'` (default) or `'single'`.
- `'complex'`, if `true` the inputs are complex (default `value` is `false`).
- `'a'`, to set the lower bound of the interval of the uniform distribution used to generate input datas (default `value` is `0.5`).
- `'b'`, to set `b` the upper bound of the interval of the uniform distribution used to generate input datas (default `value` is `2`).

In Listings 64 and 65 two examples with outputs are provided.

Listing 64: : Benchmarking `X=mldivide(A,B)` with `A` a `N-by-4-by-4` matrix `amat` object and `B` a `N-by-4-by-5` matrix `amat` object.

```
LN=10^5*[2:2:10];
fc_amat.benchs.mldivide(LN,'d',4,'n',5, 'rhstype','mat');
```

Output

```
#-----
# computer: ryzen
# system: Ubuntu 22.04.1 LTS (x86_64)
# processor: AMD Ryzen 5 3500U with Radeon Vega Mobile Gfx
# (1 procs/4 cores by proc/2 threads by core)
# RAM: 13.6 Go
# software: Matlab
# release: 2022a
# MaxThreads: 4
#-----
# 1st parameter is :
# -> amat[double] with (N,m,n)=(N,4,4)
# containing strictly diagonally dominant matrices
# 2nd parameter is :
# -> matrix[double] with (m,n)=(4,5), size=[4 5]
# Error function: @(X)max(norm(A*X-B))
#-----
#date:2022/12/19 18:56:21
#nbruns:5
#numpy:      i4      f4      f4
#format:      %d      %.3f      %.3e
#labels:      N mldivide(s) Error[0]
200000      0.635  1.099e-14
400000      1.152  1.510e-14
600000      1.753  1.928e-14
800000      2.411  2.792e-14
1000000     3.055  2.011e-14
```

Listing 65: : Benchmarking `X=mldivide(A,B)` where `A` is `N-by-3-by-3` `amat` object and `B` is `N-by-3-by-1` `amat` object with both `complex single` values.

```
LN=10^5*[2:2:10];
fc_amat.benchs.mldivide(LN,'d',3,'complex',true,'class','single', ...
    'info',false);
```

Output

```
#-----
# 1st parameter is :
# -> amat[complex single] with (N,m,n)=(N,3,3)
# containing strictly diagonally dominant matrices
# 2nd parameter is :
# -> amat[complex single] with (N,nr,nc)=(200000,3,1), size=[200000 3 1]
# Error function: @(X)max(norm(A*X-B))
#-----
#date:2022/12/19 18:57:38
#nbruns:5
#numpy:      i4      f4      f4
#format:      %d      %.3f      %.3e
#labels:      N mldivide(s) Error[0]
200000      0.241  2.458e-06
400000      0.558  2.387e-06
600000      0.851  1.966e-06
800000      1.147  2.588e-06
1000000     1.522  2.110e-06
```

8 References

- [1] François Cuvelier. Efficient algorithms to perform linear algebra operations on 3d arrays in vector languages. 2018.

- [2] Francois Cuvelier. fc-bench: Matlab toolbox for benckmarking. <http://www.math.univ-paris13.fr/~cuvelier/software/Matlab/fc-bench.html>, 2018.