
pyOptFEM Documentation

Release 1.0.1

F. Cuvelier

October 14, 2013

1	Presentation	3
1.1	Classical assembling algorithm (version base)	6
1.2	Sparse matrix requirement	7
1.3	Classical optimized assembling algorithm (version OptV1)	7
1.4	New Optimized assembling algorithm (version OptV2)	7
2	2D benchmarks	15
2.1	Benchmark usage	15
2.2	Mass Matrix	16
2.3	Stiffness Matrix	18
2.4	Stiffness Elasticity Matrix	22
3	3D benchmarks	27
3.1	Benchmark usage	27
3.2	Mass Matrix	28
3.3	Stiffness Matrix	30
3.4	Elasticity Stiffness Matrix	34
4	FEM2D module	39
4.1	Assembly matrices (versions base, OptV1 and OptV2)	40
4.2	Elementary matrices (used by versions base and OptV1)	46
4.3	Vectorized tools (used by version OptV2)	49
4.4	Vectorized elementary matrices (used by version OptV2)	50
4.5	Mesh	55
5	FEM3D module	59
5.1	Assembly matrix (versions base, OptV1 and OptV2)	60
5.2	Elementary matrix (used by versions base and OptV1)	64
5.3	Vectorized tools (used by version OptV2)	70
5.4	Vectorized elementary matrix (used by version OptV2)	70
5.5	Mesh	75
6	valid2D module	77
6.1	Mass Matrix	77
6.2	Stiffness matrix	78
6.3	Stiffness Elasticity Matrix	82
7	valid3D module	85
7.1	Mass Matrix	85
7.2	Stiffness matrix	86
7.3	Stiffness Elasticity Matrix	89

8 Quick testing	93
9 Testing and Working	95
10 Requirements	97
11 Installation	99
12 License issues	101
13 Indices and tables	103
Python Module Index	105
Index	107

pyOptFEM is a Python module which aims to measure and compare the performance of three programming techniques for **assembling finite element matrices in 2D and 3D**. For each of the matrices studied, three assembly versions are available: `base`, `OptV1` and `OptV2`

Actually, three matrices are implemented (more details are given in [FEM2D module](#) and [FEM3D module](#)) :

- **Mass matrix :**

$$\mathbb{M}_{i,j} = \int_{\Omega_h} \varphi_i(q) \varphi_j(q) dq, \quad \forall (i,j) \in \{1, \dots, n_q\}^2.$$

- **Stiffness matrix :**

$$\mathbb{S}_{i,j} = \int_{\Omega_h} \nabla \varphi_i(q) \cdot \nabla \varphi_j(q) dq, \quad \forall (i,j) \in \{1, \dots, n_q\}^2.$$

- **Stiffness elasticity matrix :**

$$\mathbb{K}_{m,l} = \int_{\Omega_h} \underline{\epsilon}^t(\psi_m(q)) \underline{\sigma}(\psi_l(q)) dq, \quad \forall (m,l) \in \{1, \dots, dn_q\}^2.$$

where d is the space dimension.

Contents:

PRESENTATION

Let Ω_h be a triangular (2d) or tetrahedral (3d) mesh of $\Omega \subset \mathbb{R}^d$ corresponding to the following structure datas:

name	type	dimension	description
n_q	integer	1	number of vertices
n_{me}	integer	1	number of elements
q	double	$d \times n_q$	array of vertices coordinates. $q(\nu, j)$ is the ν -th coordinate of the j -th vertex, $\nu \in \{1, \dots, d\}$, $j \in \{1, \dots, n_q\}$. The j -th vertex will be also denoted by q^j
me	integer	$(d+1) \times n_{me}$	connectivity array. $me(\beta, k)$ is the storage index of the β -th vertex of the k -th element, in the array q , for $\beta \in \{1, \dots, (d+1)\}$ and $k \in \{1, \dots, n_{me}\}$
volumes	double	$1 \times n_{me}$	array of volumes in 3d or areas in 2d. $volumes(k)$ is the k -th element volume (3d) or element area (2d), $k \in \{1, \dots, n_{me}\}$

• **Scalar finite elements :**

Let $H_h^1(\Omega_h) = \{v \in C^0(\overline{\Omega_h}), v|_T \in \mathcal{P}_1(T), \forall T \in \mathcal{T}_h\}$, be the finite dimensional space spanned by the $\mathcal{P}_1$ -Lagrange (scalar) basis functions $\{\varphi_i\}_{i \in \{1, \dots, n_q\}}$ where $\mathcal{P}_1(T)$ denotes the space of all polynomials defined over T of total degree less than or equal to 1. The functions φ_i satisfied

$$\varphi_i(q^j) = \delta_{i,j}, \quad \forall (i, j) \in \{1, \dots, n_q\}^2$$

Then we have $\varphi_i \equiv 0$ on $T_k, \forall k \in \{1, \dots, n_{me}\}$ such that $q^i \notin T_k$.

A $\mathcal{P}_1$ -Lagrange (scalar) finite element matrix is of the generic form

$$\mathbb{D}_{i,j} = \int_{\Omega_h} \mathcal{D}(\varphi_j, \varphi_i) d\Omega_h, \quad \forall (i, j) \in \{1, \dots, n_q\}^2$$

where $\mathcal{D}$ is the bilinear differential operator (order 1) defined for all $u, v \in H_h^1(\Omega_h)$ by

$$\mathcal{D}(u, v) = \langle \mathbb{A} \nabla u, \nabla v \rangle - (u \langle \mathbf{b}, \nabla v \rangle - v \langle \nabla u, \mathbf{c} \rangle) + duv$$

and $\mathbb{A} \in (L^\infty(\Omega_h))^{d \times d}$, $\mathbf{b} \in (L^\infty(\Omega_h))^d$, $\mathbf{c} \in (L^\infty(\Omega_h))^d$ and $d \in L^\infty(\Omega_h)$ are given functions on Ω_h .

We can note that $\mathbb{D}$ is a **sparse** matrix due to supports propertie of φ_i functions.

Let $n_e = d + 1$. The element matrix $\mathbb{D}_{\alpha, \beta}(T_k)$, associated to $\mathbb{D}$, is the $n_e \times n_e$ matrix defined by

$$\mathbb{D}_{\alpha, \beta}(T_k) = \int_{T_k} \mathcal{D}(\varphi_\beta^k, \varphi_\alpha^k)(q) dq, \quad \forall (\alpha, \beta) \in \{1, \dots, n_e\}^2$$

where $\varphi_\alpha^k = \varphi_{\text{me}(\alpha,k)}$ is the α -th local basis function associated to k -th element.

For examples,

- the **Mass** matrix is defined by

$$\mathbb{M}_{i,j} = \int_{\Omega_h} \varphi_j \varphi_i d\Omega_h$$

The corresponding bilinear differential operator $\mathcal{D}$ is completely defined with $\mathbb{A} = 0$, $\mathbf{b} = \mathbf{c} = 0$ and $d = 1$.

- the **Stiffness** matrix is defined by

$$\mathbb{S}_{i,j} = \int_{\Omega_h} \langle \nabla \varphi_j, \nabla \varphi_i \rangle d\Omega_h$$

The corresponding bilinear differential operator $\mathcal{D}$ is completely defined with $\mathbb{A} = \mathbb{I}$, $\mathbf{b} = \mathbf{c} = 0$ and $d = 0$.

• **Vector finite elements :**

The dimension of the space $(H_h^1(\Omega_h))^d$ is $n_{\text{df}} = d n_q$.

- in dimension $d = 2$, we have two natural basis :

the global *alternate* basis $\mathcal{B}_a$ defined by

$$\mathcal{B}_a = \{\boldsymbol{\psi}_1, \dots, \boldsymbol{\psi}_{2n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \end{pmatrix}, \begin{pmatrix} \varphi_2 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_{n_q} \end{pmatrix} \right\}$$

and the global *block* basis $\mathcal{B}_b$ defined by

$$\mathcal{B}_b = \{\boldsymbol{\phi}_1, \dots, \boldsymbol{\phi}_{2n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_2 \\ 0 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2 \end{pmatrix}, \dots, \begin{pmatrix} 0 \\ \varphi_{n_q} \end{pmatrix} \right\}.$$

- in dimension $d = 3$, we have two natural basis :

the global *alternate* basis $\mathcal{B}_a$ defined by

$$\mathcal{B}_a = \{\boldsymbol{\psi}_1, \dots, \boldsymbol{\psi}_{3n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_1 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_{n_q} \end{pmatrix} \right\}$$

and the global *block* basis $\mathcal{B}_b$ defined by

$$\mathcal{B}_b = \{\boldsymbol{\phi}_1, \dots, \boldsymbol{\phi}_{3n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \\ 0 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \\ 0 \end{pmatrix}, \dots, \begin{pmatrix} 0 \\ \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_1 \end{pmatrix}, \dots, \begin{pmatrix} 0 \\ 0 \\ \varphi_{n_q} \end{pmatrix} \right\}.$$

A $\mathcal{P}_1$ -Lagrange (vector) finite element matrix in $\mathcal{B}_a$ basis is of the generic form

$$\mathbb{H}_{l,m} = \int_{\Omega_h} \mathcal{H}(\psi_m, \psi_l) d\Omega_h, \quad \forall (l, m) \in \{1, \dots, d n_q\}^2$$

where $\mathcal{H}$ is the bilinear differential operator (order 1) defined by

$$\mathcal{H}(\mathbf{u}, \mathbf{v}) = \sum_{\alpha, \beta=1}^d \mathcal{D}^{\alpha, \beta}(u_\alpha, v_\beta)$$

and $\mathcal{D}^{\alpha, \beta}$ is a bilinear differential operator of scalar type.

For example, in dimension $d = 2$, the **Stiffness Elasticity** matrix is defined by

$$\mathbb{K}_{m,l} = \int_{\Omega_h} \underline{\epsilon}^t(\psi_l(q)) \mathbb{C} \underline{\epsilon}(\psi_m(q)), \quad \forall (m, l) \in \{1, \dots, 2 n_q\}^2.$$

where $\underline{\epsilon} = (\epsilon_{xx}, \epsilon_{yy}, \epsilon_{xy})^t$ is strain tensors respectively and $\mathbb{C}$ is the Hooke matrix

$$\mathbb{C} = \begin{pmatrix} \lambda + 2\mu & \lambda & 0 \\ \lambda & \lambda + 2\mu & 0 \\ 0 & 0 & \mu \end{pmatrix}$$

Then the bilinear differential operator associated with this matrix is given by

$$\begin{aligned} \mathcal{H}(\mathbf{u}, \mathbf{v}) &= \left\langle \begin{pmatrix} \lambda + 2\mu & 0 \\ 0 & \mu \end{pmatrix} \nabla u_1, \nabla v_1 \right\rangle + \left\langle \begin{pmatrix} 0 & \mu \\ \lambda & 0 \end{pmatrix} \nabla u_2, \nabla v_1 \right\rangle \\ &+ \left\langle \begin{pmatrix} 0 & \lambda \\ \mu & 0 \end{pmatrix} \nabla u_1, \nabla v_2 \right\rangle + \left\langle \begin{pmatrix} \mu & 0 \\ 0 & \lambda + 2\mu \end{pmatrix} \nabla u_2, \nabla v_2 \right\rangle \end{aligned}$$

We present now three algorithms (versions `base`, `OptV1` and `OptV2`) for assembling this kind of matrix.

Note: These algorithms can be successfully implemented in various interpreted languages under some assumptions. For all versions, it must have a sparse matrix implementation. For version `OptV1` and `OptV2`, we also need a particular sparse matrix constructor (see [Sparse matrix requirement](#)). And, finally, `OptV2` also required that the interpreted languages support classical **vectorization** operations. Here is the actual list of interpreted languages for which we have successfully implemented these three algorithms :

- Python with *Numpy* and *Scipy* modules,
- Matlab,
- Octave,
- Scilab

1.1 Classical assembling algorithm (version base)

Due to support properties of P_1 -Lagrange basis functions, we have the classical algorithm :

Note: We recall the classical matrix assembling in dimension d with $n_e = d + 1$.

```

1:  $\mathbb{M} \leftarrow 0$ 
2: for  $k \leftarrow 1$  to  $n_{me}$  do
3:    $\mathbb{E} \leftarrow \text{ElemMat}(\text{areas}(k), \dots)$ 
4:   for  $\alpha \leftarrow 1$  to  $n_e$  do
5:      $i \leftarrow \text{me}(\alpha, k)$ 
6:     for  $\beta \leftarrow 1$  to  $d + 1$  do
7:        $j \leftarrow \text{me}(\beta, k)$ 
8:        $\mathbb{M}_{i,j} \leftarrow \mathbb{M}_{i,j} + \mathbb{E}_{\alpha,\beta}$ 
9:     end for
10:  end for
11: end for

```

$\triangleright$ Sparse matrix $n_q \times n_q$
 $\triangleright$ Loop over mesh elements
 $\triangleright$ Compute element matrix $n_e \times n_e$

Figure 1.1: Classical matrix assembling in 2d or 3d

In fact, for each element we add its element matrix to the global sparse matrix (lines 4 to 10 of previous algorithm). This operation is illustrated in the following figure in 2d scalar fields case :

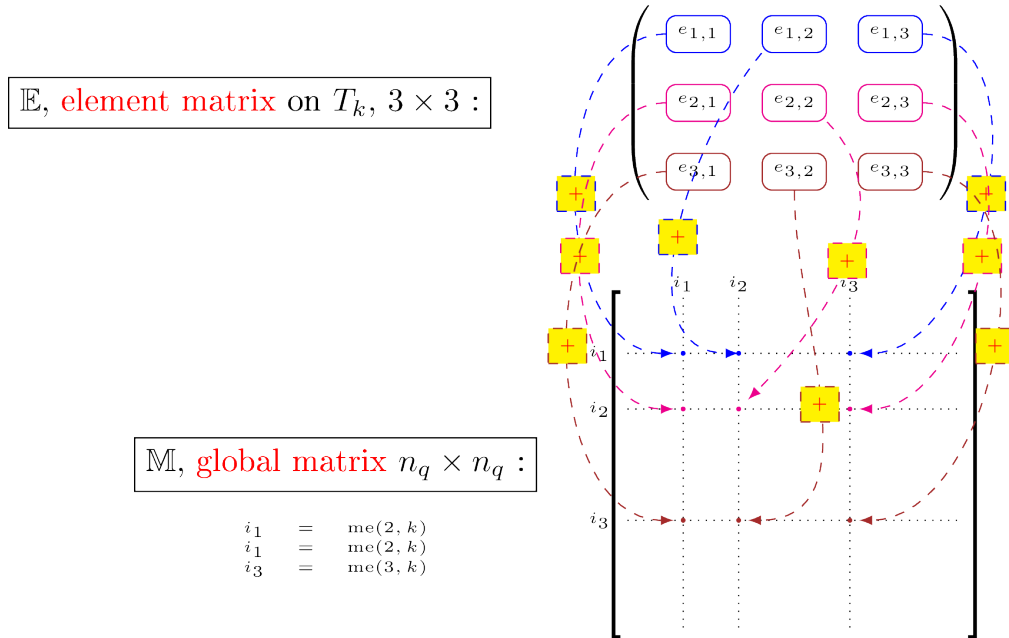


Figure 1.2: Adding of an element matrix to global matrix in 2d scalar fields case

The repetition of elements insertion in **sparse** matrix is very expensive.

1.2 Sparse matrix requirement

The interpreted language must contain a function to generate a sparse matrix M from three 1d arrays of same length I_g , J_g and K_g such that $M(I_g(k), J_g(k)) = K_g(k)$. Furthermore, the elements of K_g having the same indices in I_g and J_g must be summed.

We give for several interpreted languages the corresponding function :

- Python (*scipy.sparse* module) : $M = \text{sparse}.\langle \text{format} \rangle_matrix(K_g, (I_g, J_g), \text{shape}=(m, n))$ where $\langle \text{format} \rangle$ is the sparse matrix format chosen in *csc*, *csr*, *lil*, ...
- Matlab : $M = \text{sparse}(I_g, J_g, K_g, m, n)$, only *csc* format.
- Octave : $M = \text{sparse}(I_g, J_g, K_g, m, n)$, only *csc* format.
- Scilab : $M = \text{sparse}([I_g, J_g], K_g, [m, n])$, only row-by-row format.

Obviously, this kind of function exists in compiled languages. For example, in C language, one can use the *SuiteSparse* from T. Davis and with Nvidia GPU, one can use *Thrust* library.

1.3 Classical optimized assembling algorithm (version OptV1)

The idea is to create three global 1d-arrays I_g , J_g and K_g allowing the storage of the element matrices as well as the position of their elements in the global matrix. The length of each array is $n_e^2 n_{me}$. (i.e. $9n_{me}$ for $d = 2$ and $16n_{me}$ for $d = 3$) Once these arrays are created, the matrix assembly is obtained with one of the previous command.

To create these three arrays, we first define three local 1d-arrays K_k^e , I_k^e and J_k^e of n_e^2 elements obtained from a generic element matrix $\mathbb{E}(T_k)$ of dimension n_e :

K_k^e : elements of the matrix $\mathbb{E}(T_k)$ stored column-wise,
 I_k^e : global row indices associated to the elements stored in K_k^e ,
 J_k^e : global column indices associated to the elements stored in K_k^e .

From these arrays, it is then possible to build the three global arrays I_g , J_g and K_g , of size $n_{dfe}^2 n_{me} \times 1$ defined, $\forall k \in \{1, \dots, n_{me}\}$, $\forall l \in \{1, \dots, n_{dfe}^2\}$, by

$$\begin{aligned}
 K(n_{dfe}^2(k-1) + l) &= K_k^e(l), \\
 I(n_{dfe}^2(k-1) + l) &= I_k^e(l) = \mathcal{I}^k((l-1) \bmod m + 1), \\
 J(n_{dfe}^2(k-1) + l) &= J_k^e(l) = \mathcal{I}^k(E((l-1)/m) + 1).
 \end{aligned}$$


So, for each triangle T_k , we have

Then, a simple algorithm can build these three arrays using a loop over each triangle.

Note: We give the complete OptV1 algorithm

1.4 New Optimized assembling algorithm (version OptV2)

We present the optimized version 2 algorithm where no loop is used. We define three 2d-arrays that allow to store all the element matrices as well as their positions in the global matrix. We denote by $\mathbb{K}_g$, $\mathbb{I}_g$ and $\mathbb{J}_g$ these $n_{dfe}^2 - by - n_{me}$

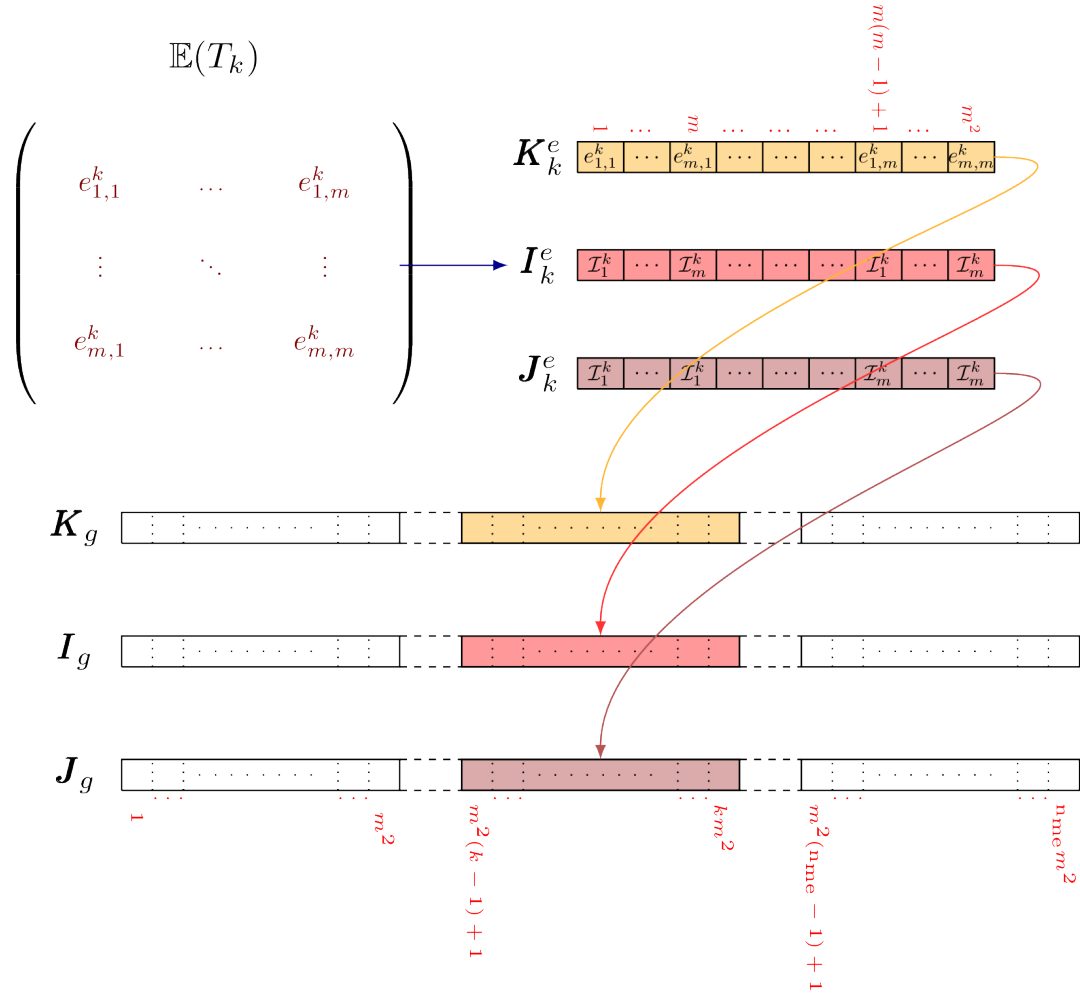
Algorithm 1 Optimized matrix assembly - version 1

```

1:  $dim \leftarrow n_{dfe}^2 n_{me}$ 
2:  $I_g \leftarrow \mathbb{O}_{dim \times 1}$ 
3:  $J_g \leftarrow \mathbb{O}_{dim \times 1}$ 
4:  $K_g \leftarrow \mathbb{O}_{dim \times 1}$ 
5:  $ii \leftarrow [1 : n_{dfe}]^t * \mathbb{1}_{1 \times n_{dfe}}; ii \leftarrow ii(:);$ 
6:  $jj \leftarrow \mathbb{1}_{n_{dfe} \times 1} * [1 : n_{dfe}]; jj \leftarrow jj(:)$ 
7:  $kk \leftarrow [1 : n_{dfe}^2]$ 
8: for  $k \leftarrow 1$  to  $n_{me}$  do
9:    $\mathbb{E} \leftarrow \text{ElemMat}(\text{areas}(k), \dots)$ 
10:   $I_g(kk) \leftarrow \mathcal{I}^k(ii)$ 
11:   $J_g(kk) \leftarrow \mathcal{I}^k(jj)$ 
12:   $K_g(kk) \leftarrow \mathbb{E}(:)$ 
13:   $kk \leftarrow kk + n_{dfe}^2$ 
14: end for
15:  $\mathbb{M} \leftarrow \text{sparse}(I_g, J_g, K_g, n_q, n_q)$ 
    
```

$\triangleright$ 1d array of size dim
 $\triangleright$ 1d array of size dim
 $\triangleright$ 1d array of size dim

arrays, defined $\forall k \in \{1, \dots, n_{me}\}, \forall il \in \{1, \dots, n_{dfe}^2\}$ by

$$\mathbb{K}_g(il, k) = \mathbf{K}_k^e(il), \quad \mathbb{I}_g(il, k) = \mathbf{I}_k^e(il), \quad \mathbb{J}_g(il, k) = \mathbf{J}_k^e(il). \quad (1.1)$$

The three local arrays $\mathbf{K}_k^e$, $\mathbf{I}_k^e$ and $\mathbf{J}_k^e$ are thus stored in the k^{th} column of the global arrays $\mathbb{K}_g$, $\mathbb{I}_g$ and $\mathbb{J}_g$ respectively.

A natural way to build these three arrays consists in using a loop through the triangles T_k in which we insert the local arrays column-wise

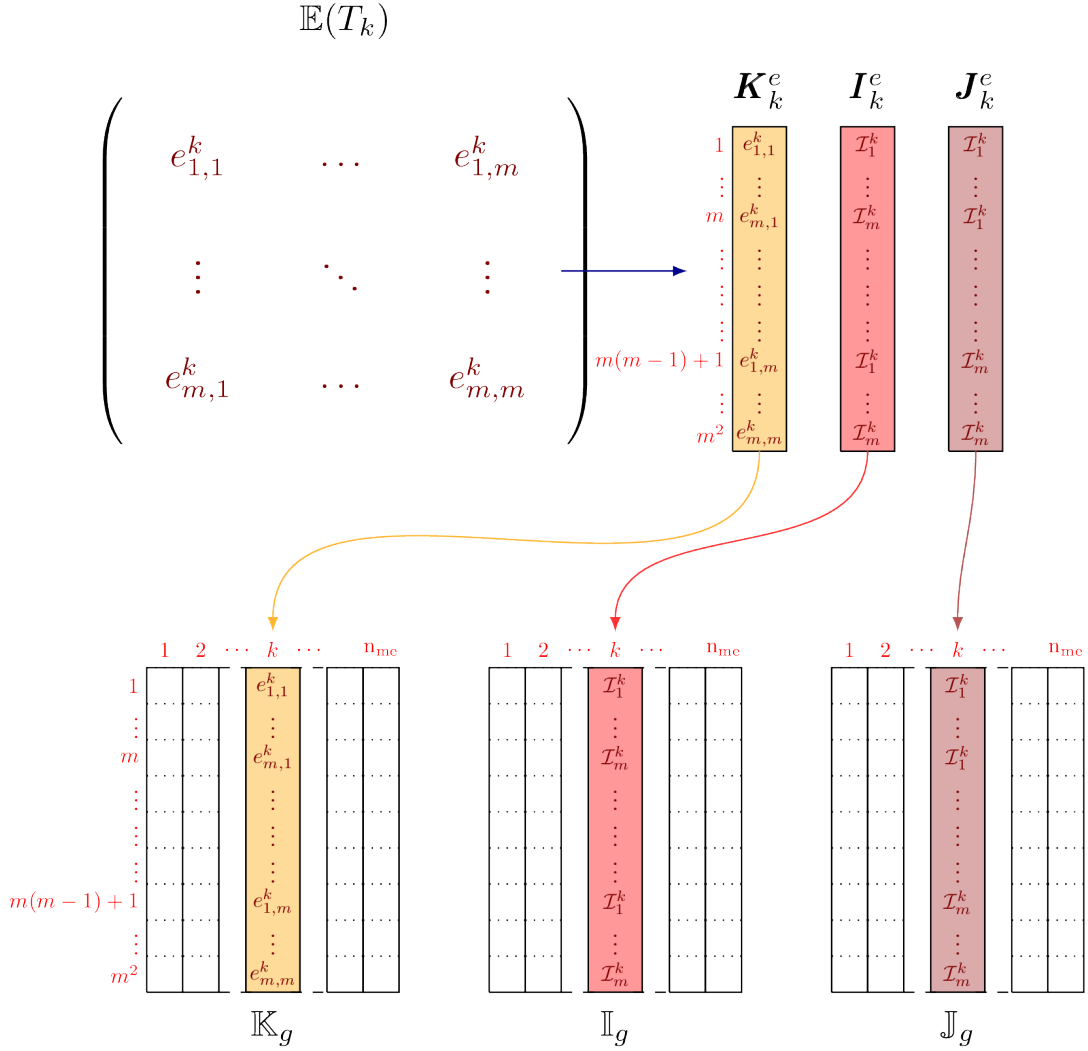


Figure 1.3: Build $\mathbb{K}_g$, $\mathbb{I}_g$ and $\mathbb{J}_g$ with loop

The natural construction of these three arrays is done column-wise. So, for each array there are n_{me} columns to compute, which depends on the mesh size. To vectorize, we must fill these arrays by row-wise operations, and then for each array there are n_{dfe}^2 rows to compute. We recall that n_{dfe} does not depend on the mesh size. These rows insertions are represented in Figure 1.4. We can also remark that, $\forall (\alpha, \beta) \in \{1, \dots, n_{dfe}\}$, with $m = n_{dfe}$,

$$\mathbb{K}_g(m(\beta - 1) + \alpha, k) = e_{\alpha, \beta}^k, \quad \mathbb{I}_g(m(\beta - 1) + \alpha, k) = \mathcal{I}_\alpha^k, \quad \mathbb{J}_g(m(\beta - 1) + \alpha, k) = \mathcal{I}_\beta^k.$$

where, in scalar fields case, $\mathcal{I}_\alpha^k = \text{me}(\alpha, k)$, $\forall \alpha \in \{1, \dots, d+1\}$ and in vector fields case, $\mathcal{I}_{da-b}^k = d \text{me}(a, k) - b$, $\forall a \in \{1, \dots, d+1\}$, $\forall b \in \{0, \dots, d-1\}$.

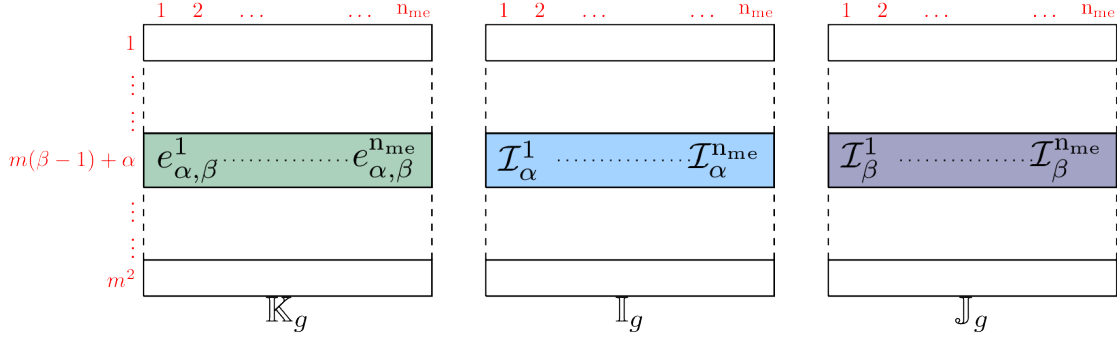


Figure 1.4: Row-wise operations on global arrays $\mathbb{I}_g$, $\mathbb{J}_g$ and $\mathbb{K}_g$

As we can see in Figures 1.5 and 1.6, it is quite easy to vectorize $\mathbb{I}_g$ and $\mathbb{J}_g$ computations in scalar fields case by filling these arrays lines by lines :

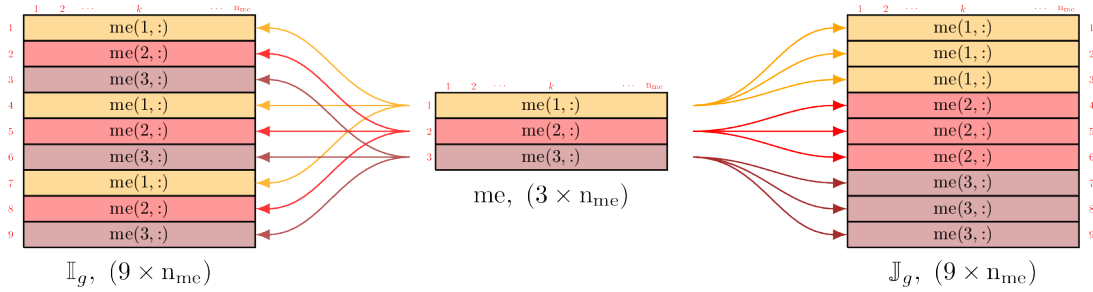


Figure 1.5: Build $\mathbb{I}_g$ and $\mathbb{J}_g$: OptV2 version for 2d *scalar* matrix

Using vectorization tools, we can compute $\mathbb{I}_g$ and $\mathbb{J}_g$ in one line. we give in Figure 1.7 the vectorized algorithms in 2d and 3d scalar fields.


In vector fields case, we construct the tabular $\mathbb{T}$ such that $\mathbb{T}(\alpha, k) = \mathcal{I}_\alpha^k$, $\forall \alpha \in \{1, \dots, n_{\text{dfe}}\}$. Then we can vectorized $\mathbb{I}_g$ and $\mathbb{J}_g$ computations in vector fields case. We represent in Figure 1.8 these operations in 2d.

Now, it remains to vectorize the computation of $\mathbb{K}_g$ array which contains all the element matrices associated to $\mathbb{D}$ or $\mathbb{H}$: it should be done by a **row-wise** vector operations.

We now describe a vectorized construction of $\mathbb{K}_g$ array associated to a generic bilinear form a . For the mesh element T_k , the elementary matrix is then

given by

$$\mathbb{E}(T_k) = \begin{pmatrix} a(\varphi_{i_1^k}, \varphi_{i_1^k}) & a(\varphi_{i_1^k}, \varphi_{i_2^k}) & a(\varphi_{i_1^k}, \varphi_{i_3^k}) \\ a(\varphi_{i_2^k}, \varphi_{i_1^k}) & a(\varphi_{i_2^k}, \varphi_{i_2^k}) & a(\varphi_{i_2^k}, \varphi_{i_3^k}) \\ a(\varphi_{i_3^k}, \varphi_{i_1^k}) & a(\varphi_{i_3^k}, \varphi_{i_2^k}) & a(\varphi_{i_3^k}, \varphi_{i_3^k}) \end{pmatrix}$$

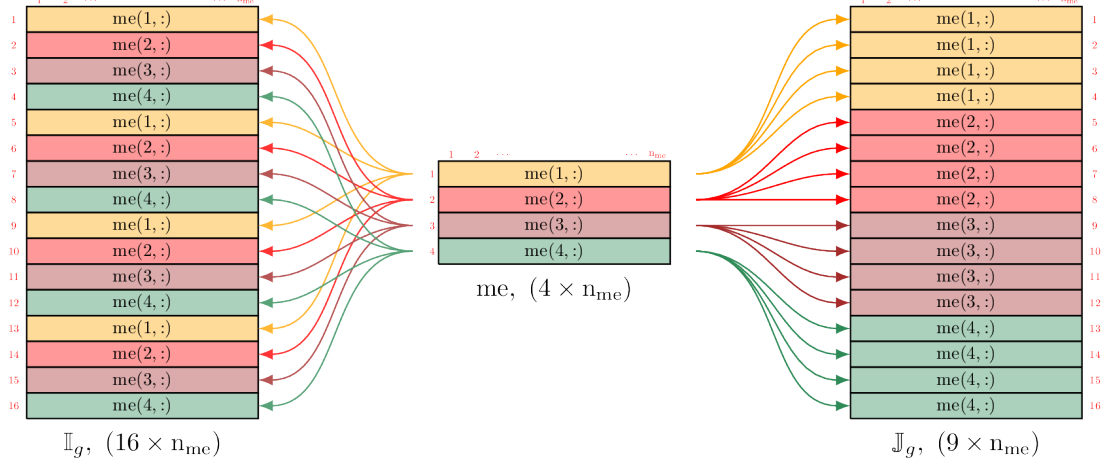
 Figure 1.6: Build I_g and J_g : OptV2 version for 3d *scalar* matrix


Algorithm 1 I_g and J_g : 2d scalar fields case

Function: $[I_g, J_g] \leftarrow \text{BUILDIGJG2D}(me)$
 $ii \leftarrow [1, 2, 3, 1, 2, 3, 1, 2, 3]$
 $jj \leftarrow [1, 1, 1, 2, 2, 2, 3, 3, 3]$
 $I_g \leftarrow me(ii, :)$ $\triangleright 9 \times n_{me}$ array
 $J_g \leftarrow me(jj, :)$ $\triangleright 9 \times n_{me}$ array
end Function:

Algorithm 2 I_g and J_g : 3d scalar fields case

Function: $[I_g, J_g] \leftarrow \text{BUILDIGJG3D}(me)$
 $ii \leftarrow [1 : 4]^t * \mathbb{1}_{1 \times 4}; ii \leftarrow ii(:);$
 $jj \leftarrow \mathbb{1}_{4 \times 1} * [1 : 4]; jj \leftarrow jj(:)$
 $I_g \leftarrow me(ii, :)$ $\triangleright 16 \times n_{me}$ array
 $J_g \leftarrow me(jj, :)$ $\triangleright 16 \times n_{me}$ array
end Function:


 Figure 1.7: Vectorized algorithms for I_g and J_g computations

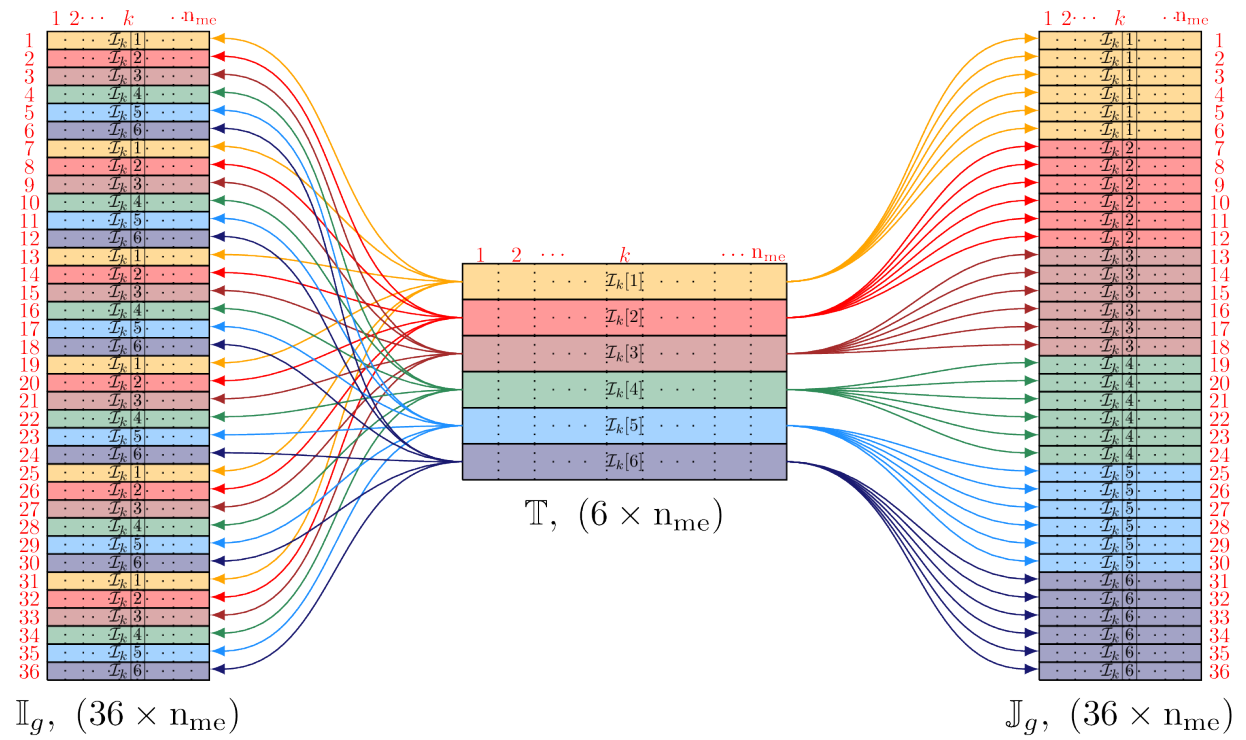
 Figure 1.8: Build $\mathbb{I}_g$ and $\mathbb{J}_g$: OptV2 version in 2d vector fields case

	1	2	...	k	...	n_{me}
1				$a(\varphi_{i_1^k}, \varphi_{i_1^k})$		
2				$a(\varphi_{i_2^k}, \varphi_{i_1^k})$		
3				$a(\varphi_{i_3^k}, \varphi_{i_1^k})$		
4				$a(\varphi_{i_1^k}, \varphi_{i_2^k})$		
5				$a(\varphi_{i_2^k}, \varphi_{i_2^k})$		
6				$a(\varphi_{i_3^k}, \varphi_{i_2^k})$		
7				$a(\varphi_{i_1^k}, \varphi_{i_3^k})$		
8				$a(\varphi_{i_2^k}, \varphi_{i_3^k})$		
9				$a(\varphi_{i_3^k}, \varphi_{i_3^k})$		

$\mathbb{K}_g$

Figure 1.9: Build $\mathbb{K}_g$ for **Mass** matrix

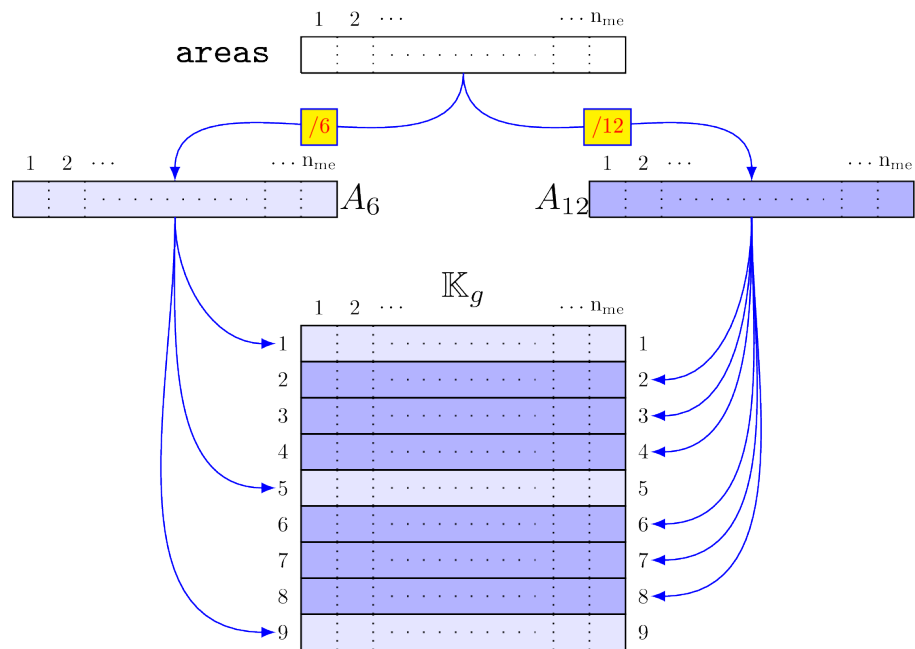Figure 1.10: Build $\mathbb{K}_g$ for Mass matrix

2D BENCHMARKS

Contents

- Benchmark usage
- Mass Matrix
- Stiffness Matrix
- Stiffness Elasticity Matrix

2.1 Benchmark usage

```
pyOptFEM.FEM2D.assemblyBench.assemblyBench ([assembly=<string>,      version=<string>,  
                                                LN=<array>,          meshname=<string>,  
                                                meshdir=<string>,      nbruns=<int>,  
                                                la=<float>,          mu=<float>,      Num=<int>,  
                                                tag=<string>, ... ])
```

Benchmark code for P_1 -Lagrange finite elements Matrices defined in FEM2D.

Parameters

- **assembly** – Name of an assembly routine. String must be : - 'MassAssembling2DP1', - 'StiffAssembling2DP1' (default) - 'StiffElasAssembling2DP1'
- **versions** – Versions list. Must be an array of in {'base','OptV1','OptV2'} (default : ['OptV2','OptV1','base'])
- **meshname** – Name of the mesh files. By default is empty string '' : use SquareMesh(N) function to generate meshes.
- **meshdir** – Directory location of FreeFEM++ mesh files. Used if meshname is not empty.
- **LN** – array of integer values. Used to generate meshes data via Th=SquareMesh(N) function if meshname is empty or via *getMesh* class to read FreeFEM++ meshes Th=getMesh(meshdir+'/' + meshname + str(N) + '.msh')
- **Default** is range(50, 90, 10)
- **nbruns** – Number of run on each mesh (default : 1)
- **save** – Save benchmark results in a file (see params <output>, <outdir> and <tag>)
- **plot** – (default : True)
- **output** – Name used to set results file name (default : 'bench2D')
- **outdir** – Directory location of saved results file name (default : './results').

- **tag** – Specify a tag string added to filename
- **la** – the first Lamé coefficient in Hooke’s law, denoted by λ . Used by stiffness elasticity assembly matrix functions (default : 2)
- **mu** – the second Lamé coefficient in Hooke’s law, denoted by μ . Used by stiffness elasticity assembly matrix functions. (default : 0.3)
- **Num** – Numbering choice. Used by stiffness elasticity assembly matrix functions. (default : 0)

2.2 Mass Matrix

- Benchmark of **MassAssembling2DP1** with versions `base`, `OptV1` and `OptV2` (see [Mass Matrix](#))

Table 2.1: MassAssembling2DP1 benchmark resume

N	nq	ndof	OptV2	OptV1	base
50	2601	2601	0.0042(s)	0.0816(s)	3.2783(s)
			x1.00	x19.50	x783.85
60	3721	3721	0.0058(s)	0.1162(s)	4.7136(s)
			x1.00	x20.02	x812.43
70	5041	5041	0.0078(s)	0.1584(s)	6.3931(s)
			x1.00	x20.32	x819.97
80	6561	6561	0.0102(s)	0.2075(s)	8.4154(s)
			x1.00	x20.33	x824.26
90	8281	8281	0.0133(s)	0.2622(s)	10.6460(s)
			x1.00	x19.66	x798.28
100	10201	10201	0.0162(s)	0.3228(s)	13.1028(s)
			x1.00	x19.89	x807.38
110	12321	12321	0.0197(s)	0.3912(s)	15.9244(s)
			x1.00	x19.88	x809.23
120	14641	14641	0.0232(s)	0.4685(s)	18.9165(s)
			x1.00	x20.21	x816.09

This tabular was build with the following code :

```
>>> from pyOptFEM.FEM2D import assemblyBench
>>> assemblyBench(assembly='MassAssembling2DP1', LN=range(50,130,10))
SquareMesh(50):
-> MassAssembling2DP1OptV2(nq=2601, nme=5000)
  run ( 1/ 1) : cputime=0.004182(s) - matrix 2601-by-2601
...
SquareMesh(120):
-> MassAssembling2DP1base(nq=14641, nme=28800)
  run ( 1/ 1) : cputime=18.916504(s) - matrix 14641-by-14641
...
```

We also obtain

- Benchmark of **MassAssembling2DP1** with versions `OptV2` and `OptV1`

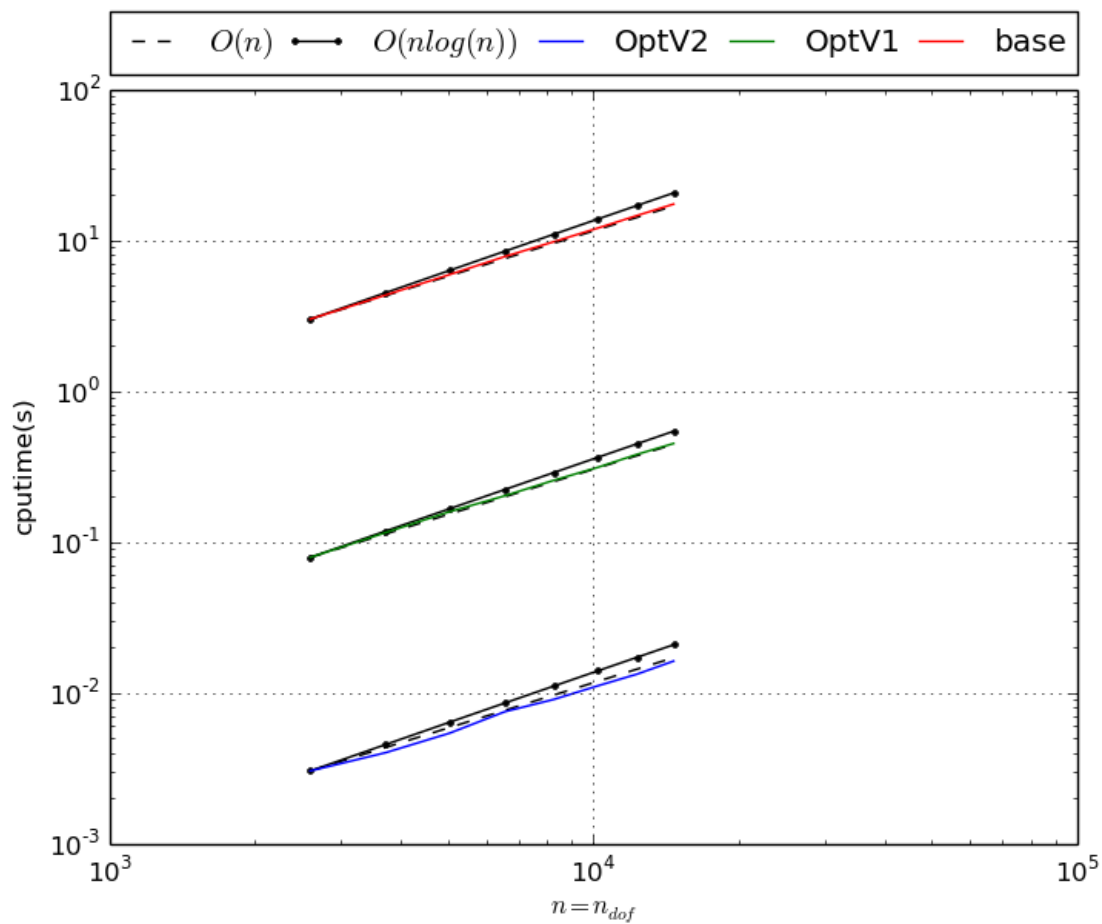


Figure 2.1: MassAssembling2DP1 benchmark

Table 2.2: MassAssembling2DP1 benchmark resume

N	nq	ndof	OptV2	OptV1
100	10201	10201	0.0163(s)	0.3196(s)
			x1.00	x19.61
200	40401	40401	0.0648(s)	1.3025(s)
			x1.00	x20.09
300	90601	90601	0.1583(s)	2.9198(s)
			x1.00	x18.45
400	160801	160801	0.2859(s)	5.1809(s)
			x1.00	x18.12
500	251001	251001	0.4591(s)	8.1059(s)
			x1.00	x17.65
600	361201	361201	0.6595(s)	11.6834(s)
			x1.00	x17.72
700	491401	491401	0.9056(s)	15.8209(s)
			x1.00	x17.47
800	641601	641601	1.1796(s)	20.8883(s)
			x1.00	x17.71
900	811801	811801	1.4933(s)	26.0264(s)
			x1.00	x17.43
1000	1002001	1002001	1.8503(s)	32.5076(s)
			x1.00	x17.57
1100	1212201	1212201	2.2262(s)	39.3237(s)
			x1.00	x17.66
1200	1442401	1442401	2.6616(s)	46.6362(s)
			x1.00	x17.52

This tabular was build with the following code :

```
>>> from pyOptFEM.FEM2D import assemblyBench
>>> assemblyBench(assembly='MassAssembling2DP1', versions=['OptV2', 'OptV1'], LN=range(100, 1300, 100)
SquareMesh(100):
-> MassAssembling2DP1OptV2(nq=10201, nme=20000)
  run ( 1/ 1) : cputime=0.016294(s) - matrix 10201-by-10201
...
SquareMesh(1200):
-> MassAssembling2DP1OptV1(nq=1442401, nme=2880000)
  run ( 1/ 1) : cputime=46.636235(s) - matrix 1442401-by-1442401
...
```

We also obtain

2.3 Stiffness Matrix

- Benchmark of **StiffAssembling2DP1** with versions base, OptV1 and OptV2

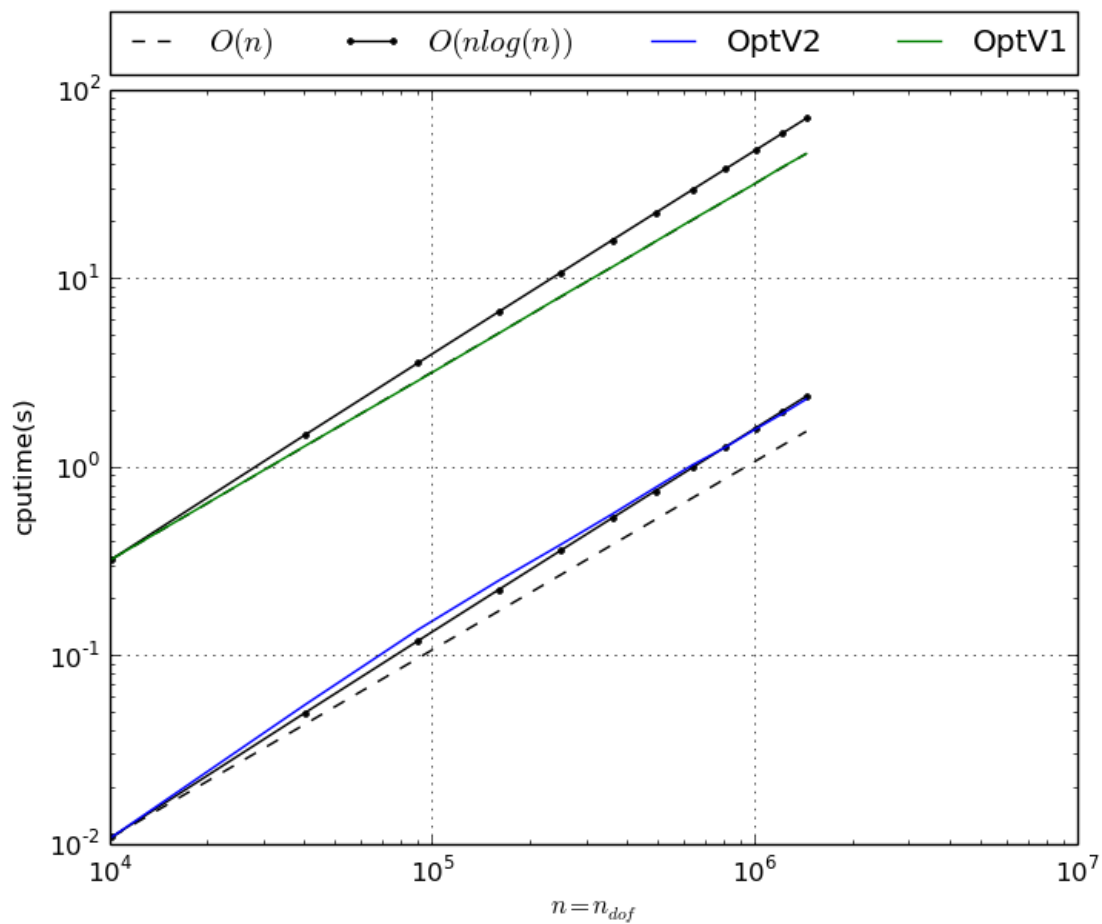


Figure 2.2: MassAssembling2DP1 benchmark

Table 2.3: StiffAssembling2DP1 benchmark resume

N	nq	ndof	OptV2	OptV1	base
50	2601	2601	0.0055(s)	0.2501(s)	3.5504(s)
			x1.00	x45.35	x643.82
60	3721	3721	0.0076(s)	0.3593(s)	5.1301(s)
			x1.00	x47.38	x676.64
70	5041	5041	0.0101(s)	0.4897(s)	6.9854(s)
			x1.00	x48.33	x689.37
80	6561	6561	0.0138(s)	0.6362(s)	9.0807(s)
			x1.00	x46.11	x658.09
90	8281	8281	0.0178(s)	0.8119(s)	11.5354(s)
			x1.00	x45.57	x647.46
100	10201	10201	0.0223(s)	1.0005(s)	14.2190(s)
			x1.00	x44.77	x636.22
110	12321	12321	0.0266(s)	1.2124(s)	17.2704(s)
			x1.00	x45.61	x649.74
120	14641	14641	0.0325(s)	1.4503(s)	20.4368(s)
			x1.00	x44.69	x629.75

This tabular was build with the following code :

```
>>> from pyOptFEM.FEM2D import assemblyBench
>>> assemblyBench(assembly='StiffAssembling2DP1', LN=range(50,130,10))
SquareMesh(50):
-> StiffAssembling2DP1OptV2(nq=2601, nme=5000)
  run ( 1/ 1) : cputime=0.005515(s) - matrix 2601-by-2601
...
SquareMesh(120):
-> StiffAssembling2DP1base(nq=14641, nme=28800)
  run ( 1/ 1) : cputime=20.436779(s) - matrix 14641-by-14641
...
```

We also obtain

- Benchmark of **StiffAssembling2DP1** with versions OptV2 and OptV1

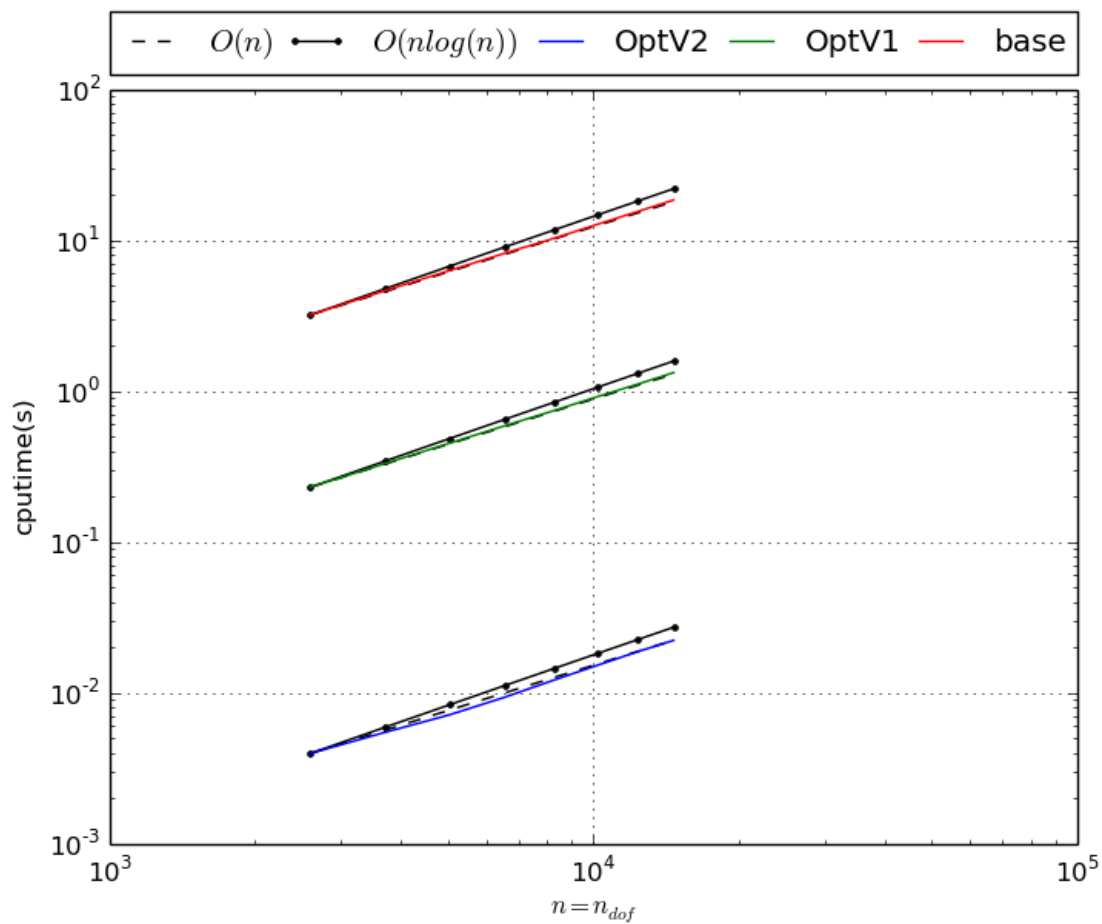


Figure 2.3: StiffAssembling2DP1 benchmark

Table 2.4: StiffAssembling2DP1 benchmark resume

N	nq	ndof	OptV2	OptV1
100	10201	10201	0.0225(s)	1.0104(s)
			x1.00	x44.93
200	40401	40401	0.0945(s)	4.0847(s)
			x1.00	x43.22
300	90601	90601	0.2379(s)	9.1818(s)
			x1.00	x38.59
400	160801	160801	0.4459(s)	16.3333(s)
			x1.00	x36.63
500	251001	251001	0.7169(s)	25.6513(s)
			x1.00	x35.78
600	361201	361201	1.0316(s)	36.8382(s)
			x1.00	x35.71
700	491401	491401	1.4316(s)	49.9507(s)
			x1.00	x34.89
800	641601	641601	1.8965(s)	65.8354(s)
			x1.00	x34.71
900	811801	811801	2.4164(s)	82.7545(s)
			x1.00	x34.25
1000	1002001	1002001	2.9450(s)	102.3931(s)
			x1.00	x34.77
1100	1212201	1212201	3.4908(s)	123.9802(s)
			x1.00	x35.52
1200	1442401	1442401	4.3144(s)	147.2963(s)
			x1.00	x34.14

This tabular was build with following code :

```
>>> from pyOptFEM.FEM2D import assemblyBench
>>> assemblyBench(assembly='StiffAssembling2DP1', versions=['OptV2', 'OptV1'], LN=range(100, 1300, 100))
SquareMesh(100):
-> StiffAssembling2DP1OptV2(nq=10201, nme=20000)
  run ( 1/ 1) : cputime=0.022488(s) - matrix 10201-by-10201
...
SquareMesh(1200):
-> StiffAssembling2DP1OptV1(nq=1442401, nme=2880000)
  run ( 1/ 1) : cputime=147.296321(s) - matrix 1442401-by-1442401
...
```

We also obtain

2.4 Stiffness Elasticity Matrix

- Benchmark of **StiffElasAssembling2DP1** with versions base, OptV1 and OptV2

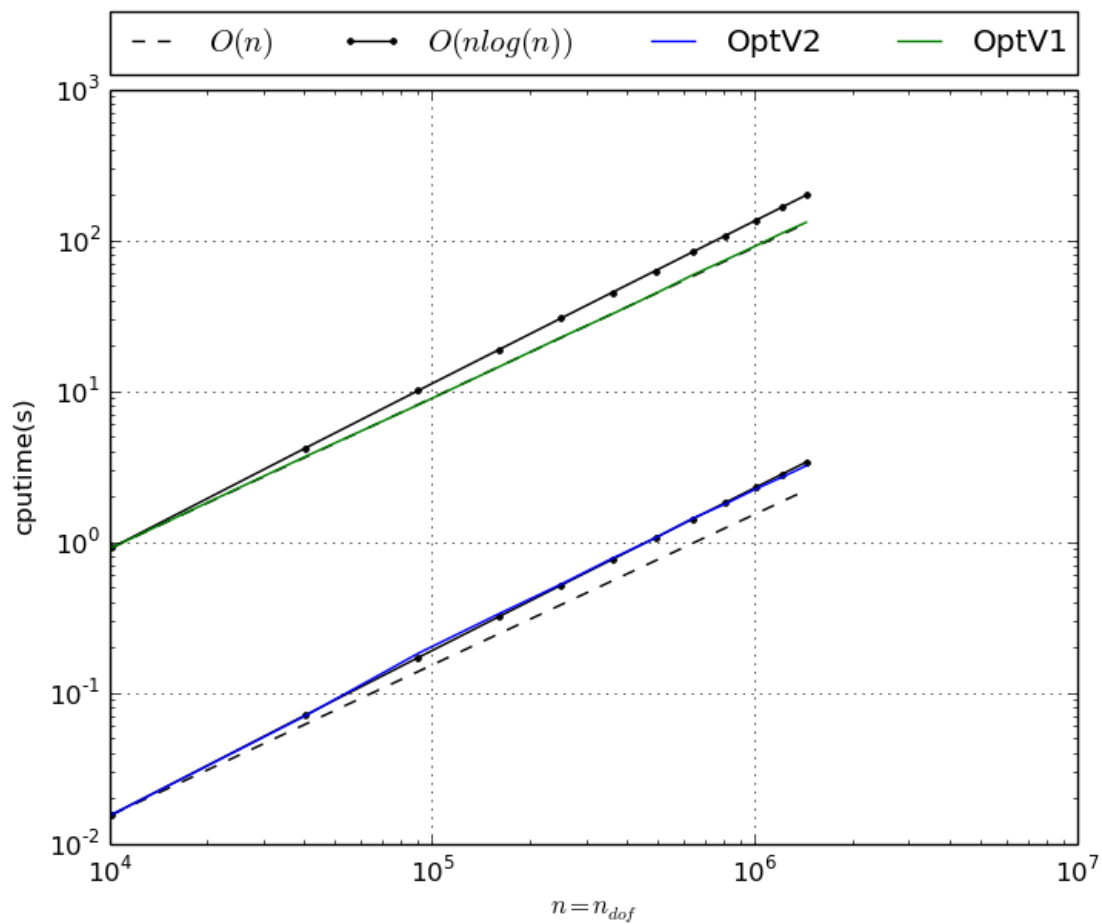


Figure 2.4: StiffAssembling2DP1 benchmark

Table 2.5: StiffElasAssembling2DP1 benchmark resume

N	nq	ndof	OptV2	OptV1	base
30	961	1922	0.0107(s)	0.2809(s)	1.8485(s)
			x1.00	x26.29	x173.04
35	1296	2592	0.0134(s)	0.3807(s)	2.5109(s)
			x1.00	x28.37	x187.11
40	1681	3362	0.0172(s)	0.4986(s)	3.2952(s)
			x1.00	x28.92	x191.13
45	2116	4232	0.0216(s)	0.6306(s)	4.1589(s)
			x1.00	x29.26	x192.97
50	2601	5202	0.0269(s)	0.7800(s)	5.1323(s)
			x1.00	x29.04	x191.07
55	3136	6272	0.0322(s)	0.9453(s)	6.2180(s)
			x1.00	x29.39	x193.35
60	3721	7442	0.0386(s)	1.1282(s)	7.4995(s)
			x1.00	x29.21	x194.14

This tabular was build with following code :

```
>>> from pyOptFEM.FEM2D import assemblyBench
>>> assemblyBench(assembly='StiffElasAssembling2DP1', LN=range(30, 65, 5))
SquareMesh(30) :
-> StiffElasAssembling2DP1OptV2(nq=961, nme=1800)
  run ( 1/ 1) : cputime=0.010683(s) - matrix 1922-by-1922
...
SquareMesh(30) :
-> StiffElasAssembling2DP1OptV2(nq=961, nme=1800)
  run ( 1/ 1) : cputime=0.010683(s) - matrix 1922-by-1922
...
```

We also obtain

- Benchmark of **StiffElasAssembling2DP1** with versions OptV2 and OptV1

Table 2.6: StiffElasAssembling2DP1 benchmark resume

N	nq	ndof	OptV2	OptV1
100	10201	20402	0.1110(s)	3.1286(s)
			x1.00	x28.18
200	40401	80802	0.5036(s)	12.5861(s)
			x1.00	x24.99
300	90601	181202	1.2058(s)	28.2232(s)
			x1.00	x23.41
400	160801	321602	2.1346(s)	50.2407(s)
			x1.00	x23.54
500	251001	502002	3.5360(s)	78.4291(s)
			x1.00	x22.18
600	361201	722402	5.3290(s)	113.4194(s)
			x1.00	x21.28
700	491401	982802	7.4691(s)	153.6793(s)
			x1.00	x20.58
800	641601	1283202	9.8943(s)	201.4319(s)
			x1.00	x20.36

This tabular was build with following code :

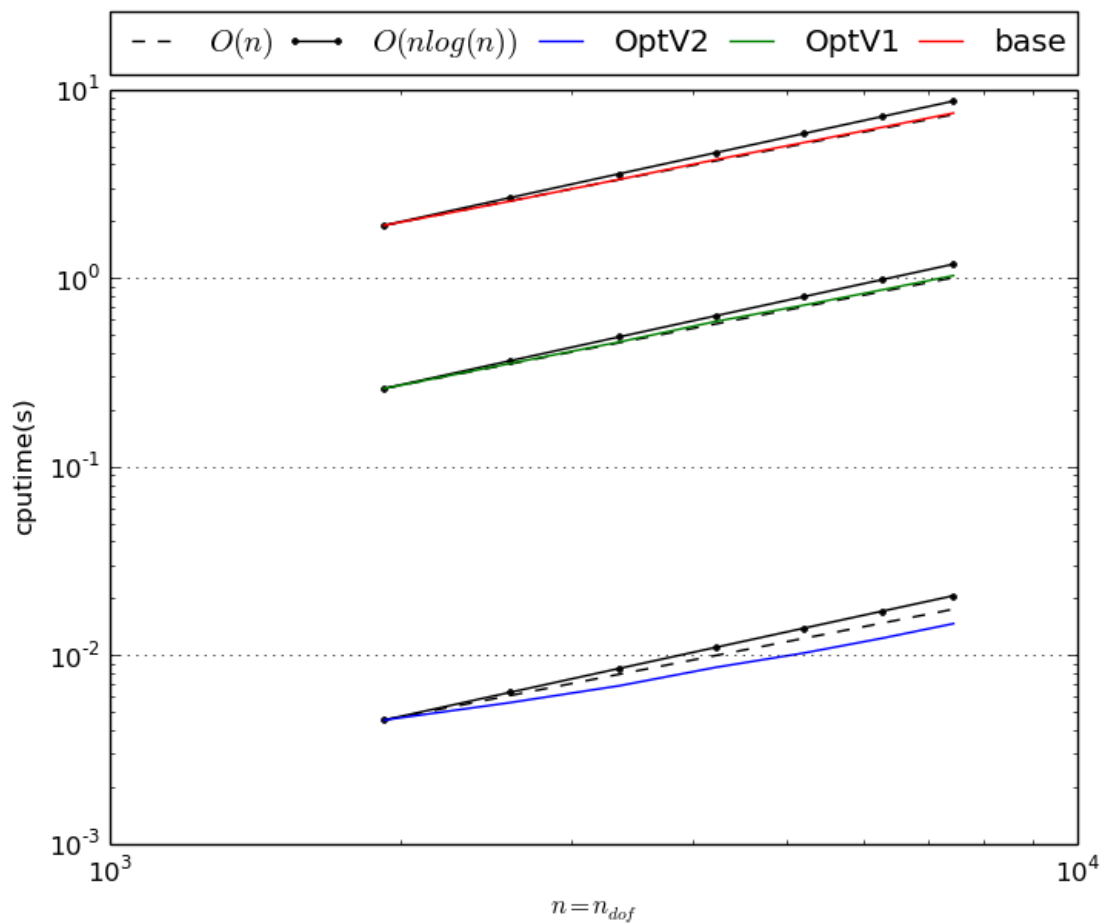


Figure 2.5: StiffElasAssembling2DP1 benchmark

```

>>> from pyOptFEM.FEM2D import assemblyBench
>>> assemblyBench(assembly='StiffElasAssembling2DP1', versions=['OptV2', 'OptV1'], LN=range(100, 900))
SquareMesh(100):
-> StiffElasAssembling2DP1OptV2(nq=10201, nme=20000)
  run ( 1/ 1) : cputime=0.111037(s) - matrix 20402-by-20402
...
SquareMesh(800):
-> StiffElasAssembling2DP1OptV1(nq=641601, nme=1280000)
  run ( 1/ 1) : cputime=201.431866(s) - matrix 1283202-by-1283202
...

```

We also obtain

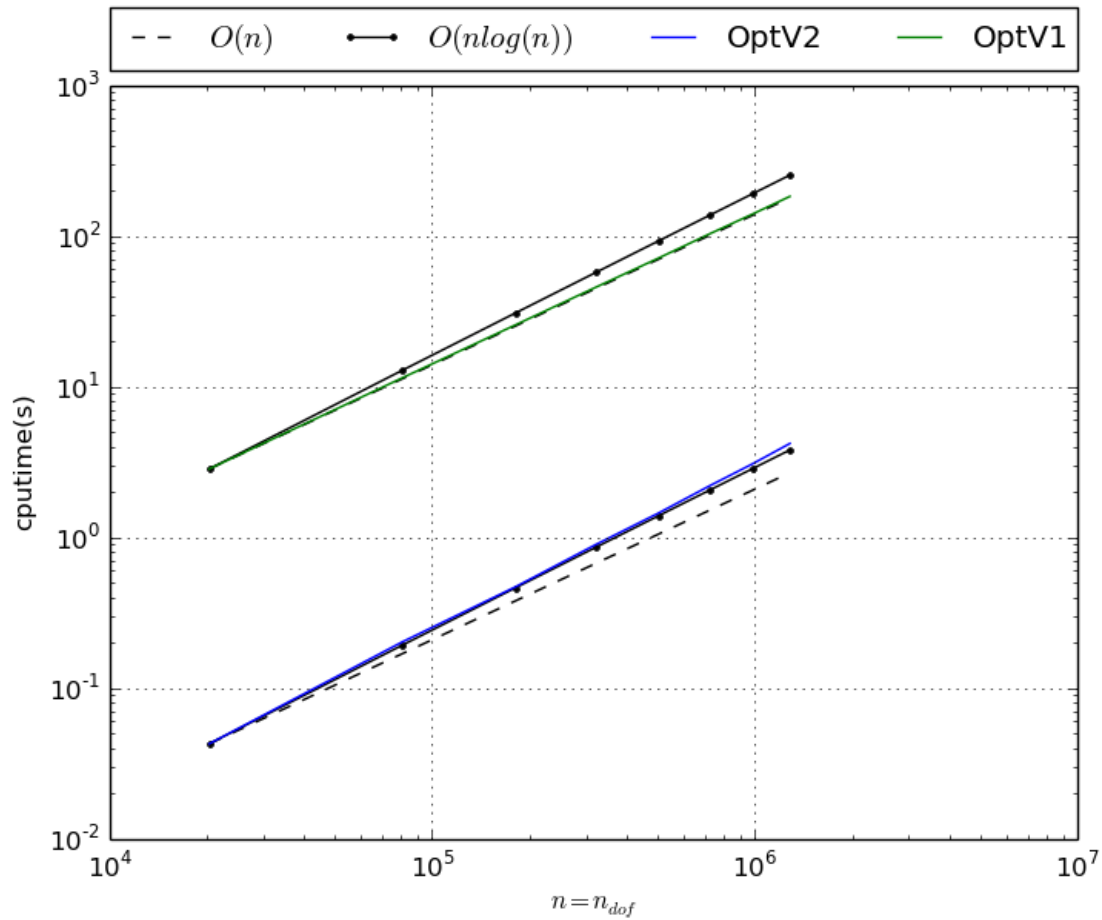


Figure 2.6: StiffElasAssembling2DP1 benchmark

3D BENCHMARKS

Contents

- Benchmark usage
- Mass Matrix
- Stiffness Matrix
- Elasticity Stiffness Matrix

3.1 Benchmark usage

```
pyOptFEM.FEM3D.assemblyBench.assemblyBench ([assembly=<string>,      version=<string>,  
                                                LN=<array>,          meshname=<string>,  
                                                meshdir=<string>,      nbruns=<int>,  
                                                la=<float>,          mu=<float>,      Num=<int>,  
                                                tag=<string>, ... ])
```

Benchmark code for P_1 -Lagrange finite elements Matrices defined in FEM3D.

Parameters

- **assembly** – Name of an assembly routine. String must be : - 'MassAssembling3DP1', - 'StiffAssembling3DP1' (default) - 'StiffElasAssembling3DP1'
- **versions** – Versions list. Must be an array of in {'base','OptV1','OptV2'} (default : ['OptV2','OptV1','base'])
- **meshname** – Name of the *medit* mesh files. By default is empty string '': use CubeMesh(N) function to generate meshes.
- **meshdir** – Directory location of *medit* mesh files. Used if meshname is not empty.
- **LN** – array of integer values. Used to generate meshes data via Th=CubeMesh(N) function if meshname is empty or via *getMesh* class to read FreeFEM++ meshes Th=getMesh(meshdir+'/' + meshname + str(N) + '.mesh')
- **Default** is range(5, 14, 2)
- **nbruns** – Number of run on each mesh (default : 1)
- **save** – Save benchmark results in a file (see params <output>, <outdir> and <tag>). (default : False)
- **plot** – (default : True)
- **output** – Name used to set results file name (default : 'bench2D')

- **outdir** – Directory location of saved results file name (default : `./results`).
- **tag** – Specify a tag string added to filename
- **la** – the first Lamé coefficient in Hooke’s law, denoted by λ . Used by stiffness elasticity assembly matrix functions. (default : 2)
- **mu** – the second Lamé coefficient in Hooke’s law, denoted by μ . Used by stiffness elasticity assembly matrix functions. (default : 0.3)
- **Num** – Numbering choice. Used by stiffness elasticity assembly matrix functions. (default : 0)

3.2 Mass Matrix

- Benchmark of **MassAssembling3DP1** with versions `base`, `OptV1` and `OptV2` (see [Mass Matrix](#))

Table 3.1: MassAssembling3DP1 benchmark resume

N	nq	ndof	OptV2	OptV1	base
5	216	216	0.0015(s)	0.0424(s)	0.8962(s)
			x1.00	x28.29	x597.49
10	1331	1331	0.0075(s)	0.3390(s)	7.1521(s)
			x1.00	x44.96	x948.64
15	4096	4096	0.0268(s)	1.1413(s)	24.2836(s)
			x1.00	x42.55	x905.35
20	9261	9261	0.0677(s)	2.7240(s)	56.9878(s)
			x1.00	x40.26	x842.21
25	17576	17576	0.1457(s)	5.2998(s)	111.0287(s)
			x1.00	x36.38	x762.11
30	29791	29791	0.2493(s)	9.2205(s)	192.1030(s)
			x1.00	x36.99	x770.64
35	46656	46656	0.4121(s)	14.6558(s)	304.5941(s)
			x1.00	x35.57	x739.17

This tabular was build with the following code :

```
>>> from pyOptFEM.FEM3D import assemblyBench
>>> assemblyBench(assembly='MassAssembling3DP1', LN=range(5, 40, 5))
CubeMesh(5):
-> MassAssembling3DP1OptV2(nq=216, nme=750)
run ( 1/ 1) : cputime=0.001254(s) - matrix 216-by-216
...
CubeMesh(35):
-> MassAssembling3DP1base(nq=46656, nme=257250)
run ( 1/ 1) : cputime=304.594078(s) - matrix 46656-by-46656
```

We also obtain

- Benchmark of **MassAssembling3DP1** with versions `OptV2` and `OptV1`

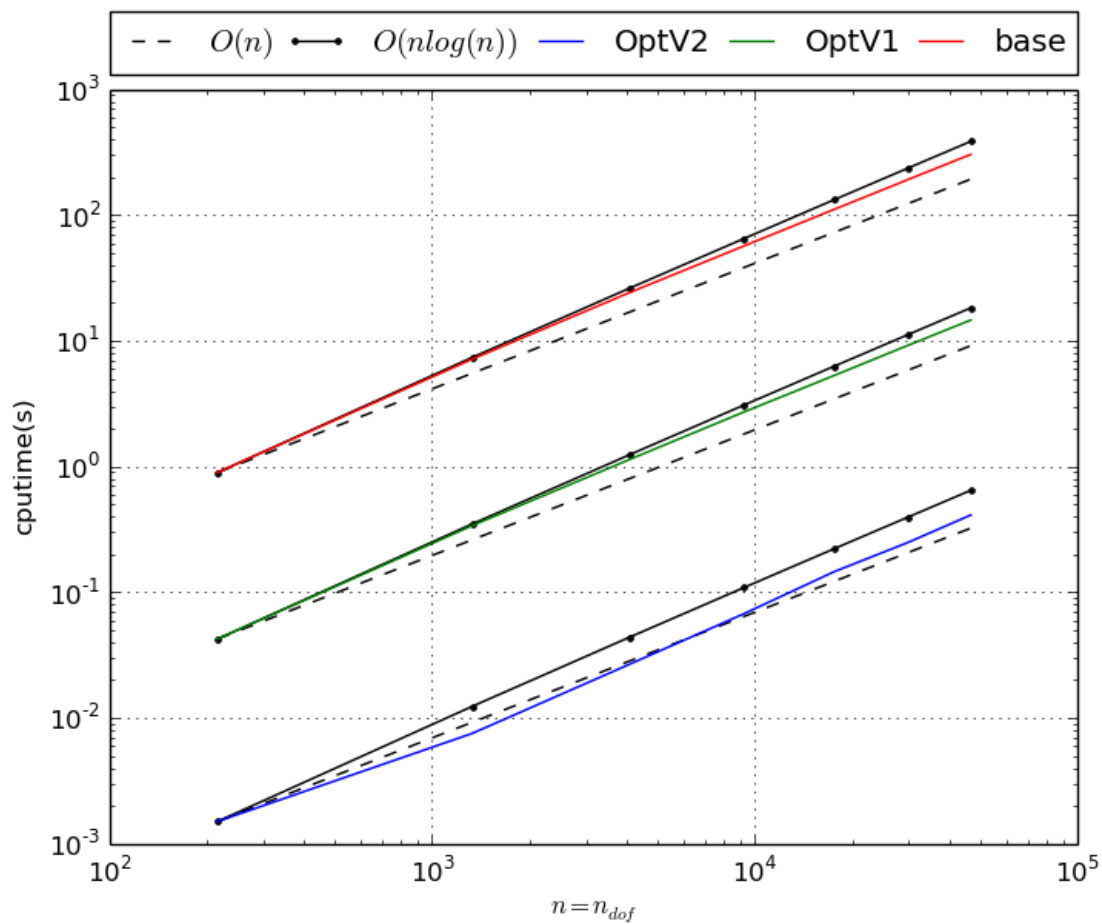


Figure 3.1: MassAssembling3DP1 benchmark

Table 3.2: MassAssembling2DP1 benchmark resume

N	nq	ndof	OptV2	OptV1
10	1331	1331	0.0065(s)	0.3656(s)
			x1.00	x56.05
20	9261	9261	0.0578(s)	2.6968(s)
			x1.00	x46.70
30	29791	29791	0.2195(s)	9.1710(s)
			x1.00	x41.77
40	68921	68921	0.6109(s)	21.7386(s)
			x1.00	x35.59
50	132651	132651	1.1558(s)	42.1679(s)
			x1.00	x36.49
60	226981	226981	2.1182(s)	73.9066(s)
			x1.00	x34.89
70	357911	357911	3.1952(s)	116.2151(s)
			x1.00	x36.37
80	531441	531441	5.1899(s)	174.4814(s)
			x1.00	x33.62
90	753571	753571	7.0460(s)	247.8245(s)
			x1.00	x35.17
100	1030301	1030301	9.8218(s)	340.9609(s)
			x1.00	x34.71

This tabular was build with the following code :

```
>>> from pyOptFEM.FEM3D import assemblyBench
>>> assemblyBench(assembly='MassAssembling3DP1', versions=['OptV2', 'OptV1'], LN=range(10, 110, 10))
CubeMesh(10):
-> MassAssembling3DP1OptV2(nq=1331, nme=6000)
  run ( 1/ 1) : cputime=0.006523(s) - matrix 1331-by-1331
...
CubeMesh(100):
-> MassAssembling3DP1OptV1(nq=1030301, nme=6000000)
  run ( 1/ 1) : cputime=340.960874(s) - matrix 1030301-by-1030301
```

We also obtain

3.3 Stiffness Matrix

- Benchmark of **StiffAssembling3DP1** with versions base, OptV1 and OptV2

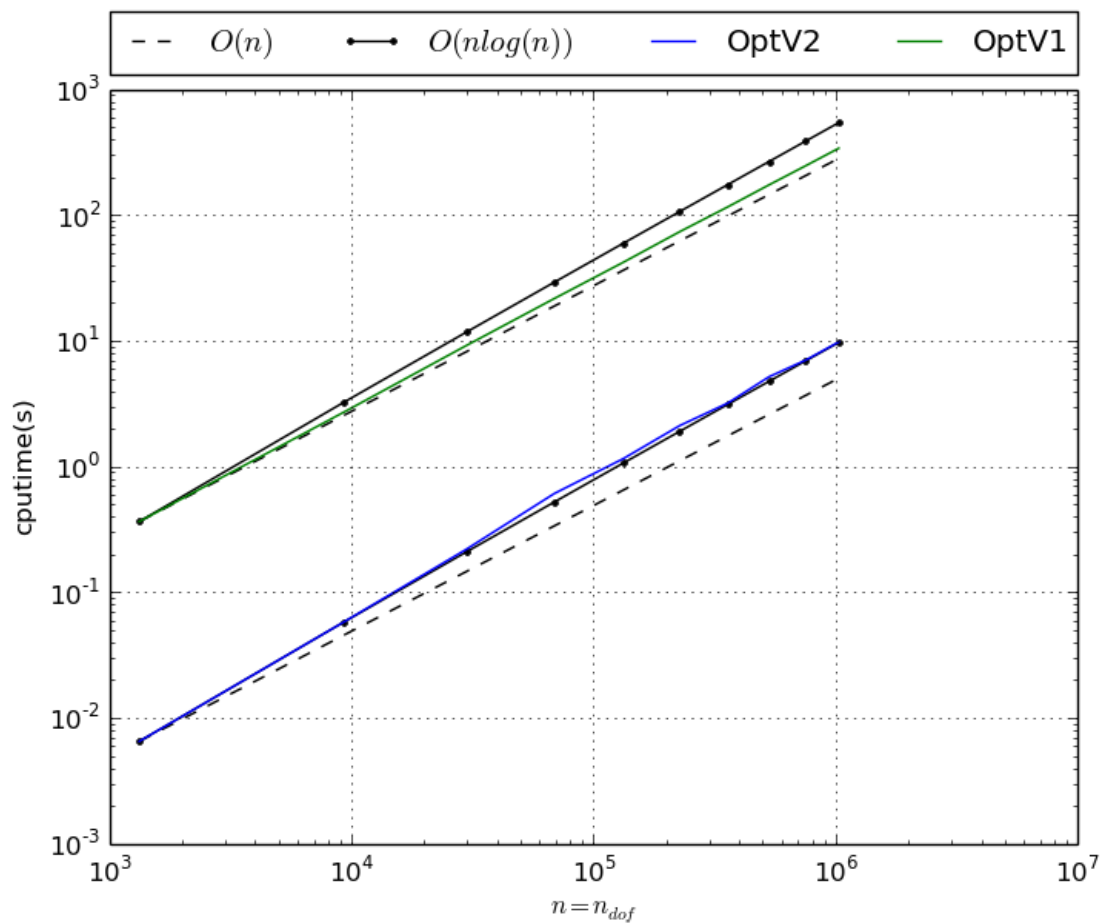


Figure 3.2: MassAssembling3DP1 benchmark

Table 3.3: StiffAssembling3DP1 benchmark resume

N	nq	ndof	OptV2	OptV1	base
5	216	216	0.0024(s)	0.0546(s)	0.9065(s)
			x1.00	x23.22	x385.72
10	1331	1331	0.0072(s)	0.4396(s)	7.2347(s)
			x1.00	x60.68	x998.63
15	4096	4096	0.0258(s)	1.4985(s)	24.5593(s)
			x1.00	x58.08	x951.81
20	9261	9261	0.0652(s)	3.4915(s)	57.9647(s)
			x1.00	x53.55	x888.96
25	17576	17576	0.1315(s)	6.7851(s)	112.9478(s)
			x1.00	x51.61	x859.14
30	29791	29791	0.2479(s)	11.8616(s)	195.8290(s)
			x1.00	x47.85	x790.05
35	46656	46656	0.4126(s)	18.3069(s)	310.0601(s)
			x1.00	x44.37	x751.46

This tabular was build with following code :

```
>>> from pyOptFEM.FEM3D import assemblyBench
>>> assemblyBench(assembly='StiffAssembling3DP1', LN=range(5, 40, 5))
CubeMesh(5):
-> StiffAssembling3DP1OptV2(nq=216, nme=750)
   run ( 1/ 1) : cputime=0.002350(s) - matrix 216-by-216
...
CubeMesh(35):
-> StiffAssembling3DP1base(nq=46656, nme=257250)
   run ( 1/ 1) : cputime=310.060121(s) - matrix 46656-by-46656
```

We also obtain

- Benchmark of **StiffAssembling3DP1** with versions OptV2 and OptV1

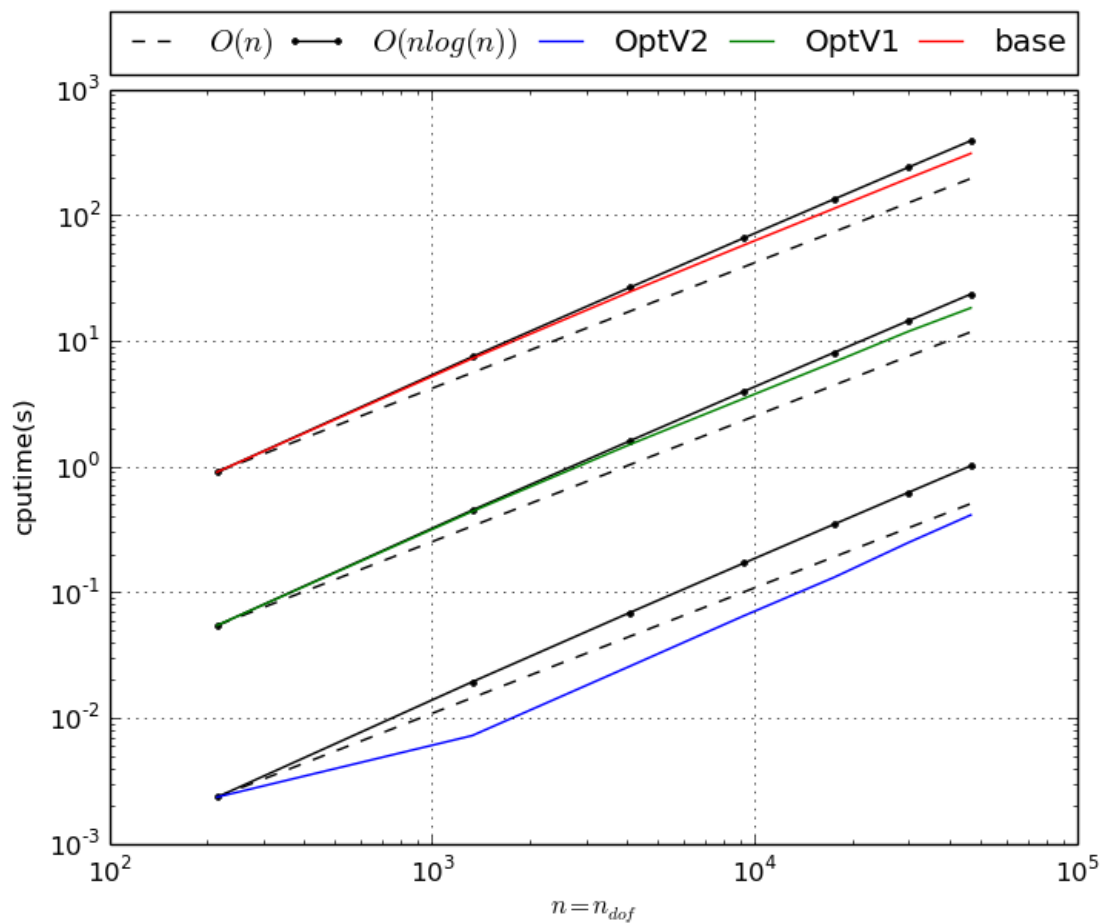


Figure 3.3: StiffAssembling3DP1 benchmark

Table 3.4: StiffAssembling3DP1 benchmark resume

N	nq	ndof	OptV2	OptV1
10	1331	1331	0.0071(s)	0.4329(s)
			x1.00	x60.68
20	9261	9261	0.0652(s)	3.4323(s)
			x1.00	x52.64
30	29791	29791	0.2525(s)	11.6349(s)
			x1.00	x46.07
40	68921	68921	0.7178(s)	27.6186(s)
			x1.00	x38.48
50	132651	132651	1.5883(s)	53.9955(s)
			x1.00	x34.00
60	226981	226981	2.8236(s)	93.1197(s)
			x1.00	x32.98
70	357911	357911	4.6881(s)	147.6608(s)
			x1.00	x31.50
80	531441	531441	7.4632(s)	220.7232(s)
			x1.00	x29.57
90	753571	753571	10.6093(s)	314.8404(s)
			x1.00	x29.68
100	1030301	1030301	14.7064(s)	427.0878(s)
			x1.00	x29.04

This tabular was build with the following code :

```
>>> from pyOptFEM.FEM3D import assemblyBench
>>> assemblyBench(assembly='StiffAssembling3DP1', versions=['OptV2', 'OptV1'], LN=range(10, 110, 10))
CubeMesh(10):
-> StiffAssembling3DP1OptV2(nq=1331, nme=6000)
run ( 1/ 1) : cputime=0.007133(s) - matrix 1331-by-1331
...
CubeMesh(100):
-> StiffAssembling3DP1OptV1(nq=1030301, nme=6000000)
run ( 1/ 1) : cputime=427.087812(s) - matrix 1030301-by-1030301
```

We also obtain

3.4 Elasticity Stiffness Matrix

- Benchmark of **StiffAssembling3DP1** with versions base, OptV1 and OptV2

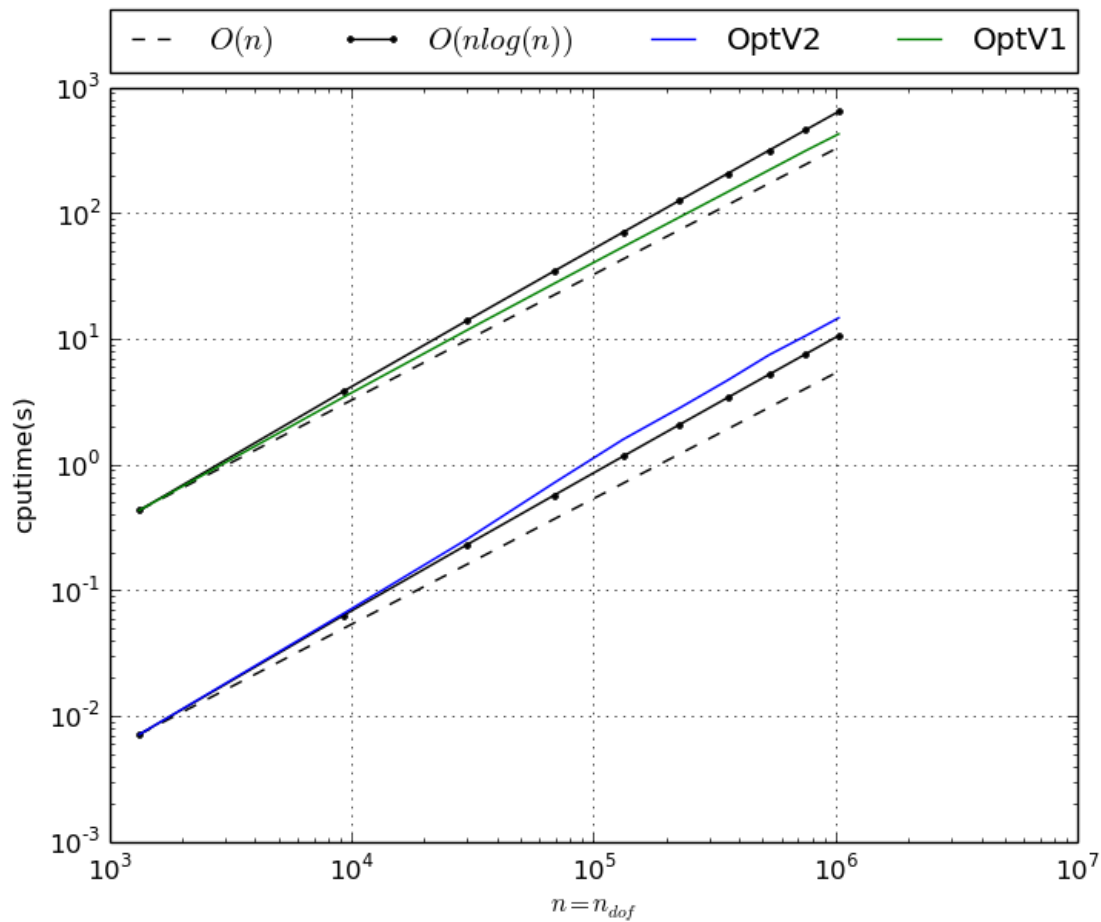


Figure 3.4: StiffAssembling3DP1 benchmark

Table 3.5: StiffAssembling3DP1 benchmark resume

N	nq	ndof	OptV2	OptV1	base
3	64	192	0.0056(s)	0.0626(s)	0.6896(s)
			x1.00	x11.23	x123.60
5	216	648	0.0085(s)	0.2877(s)	3.1838(s)
			x1.00	x33.87	x374.88
7	512	1536	0.0183(s)	0.7933(s)	8.7350(s)
			x1.00	x43.43	x478.25
10	1331	3993	0.0493(s)	2.3134(s)	25.5321(s)
			x1.00	x46.91	x517.74
13	2744	8232	0.1061(s)	5.0799(s)	55.8011(s)
			x1.00	x47.89	x526.04
17	5832	17496	0.2426(s)	11.3663(s)	126.2934(s)
			x1.00	x46.86	x520.66
20	9261	27783	0.4317(s)	18.6554(s)	205.4239(s)
			x1.00	x43.22	x475.90

This tabular was build with following code :

```
>>> from pyOptFEM.FEM3D import assemblyBench
>>> from numpy import *
>>> assemblyBench(assembly='StiffElasAssembling3DP1', LN=array([3,5,7,10,13,17,20]))
CubeMesh(3) :
-> StiffElasAssembling3DP1OptV2(nq=64, nme=162)
  run ( 1/ 1) : cputime=0.005579(s) - matrix 192-by-192
...
CubeMesh(20) :
-> StiffElasAssembling3DP1base(nq=9261, nme=48000)
  run ( 1/ 1) : cputime=205.423872(s) - matrix 27783-by-27783
```

We also obtain

- Benchmark of **StiffAssembling3DP1** with versions OptV1 and OptV2

Table 3.6: StiffAssembling3DP1 benchmark resume

N	nq	ndof	OptV2	OptV1
10	1331	3993	0.0497(s)	2.2711(s)
			x1.00	x45.73
20	9261	27783	0.4325(s)	18.1990(s)
			x1.00	x42.07
30	29791	89373	1.7316(s)	61.6716(s)
			x1.00	x35.62
40	68921	206763	4.5098(s)	146.4793(s)
			x1.00	x32.48
50	132651	397953	9.3904(s)	284.8776(s)
			x1.00	x30.34
60	226981	680943	17.2215(s)	494.1435(s)
			x1.00	x28.69
70	357911	1073733	28.1707(s)	785.3533(s)
			x1.00	x27.88

This tabular was build with following code :

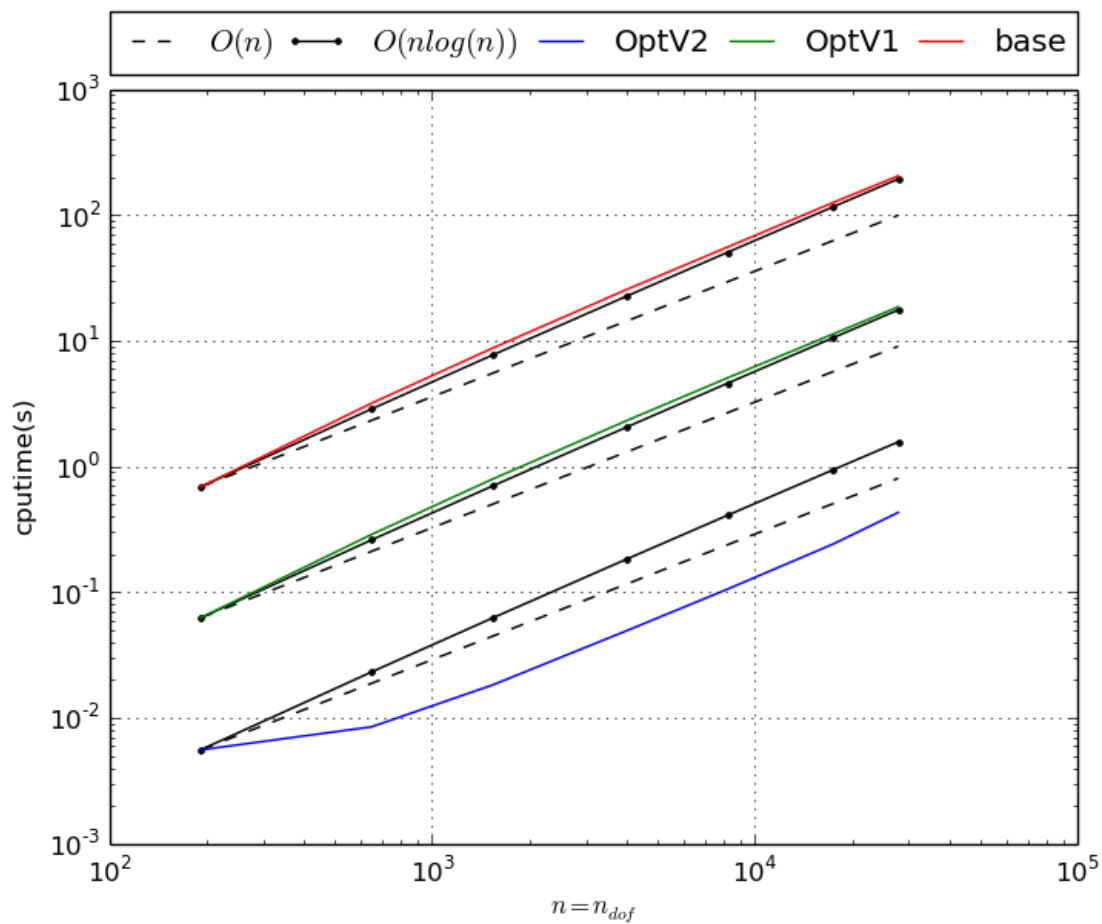


Figure 3.5: StiffElasAssembling3DP1 benchmark

```

>>> from pyOptFEM.FEM3D import assemblyBench
>>> assemblyBench(assembly='StiffElasAssembling3DP1', versions=['OptV2', 'OptV1'], LN=range(10, 80, 10))
CubeMesh(10):
-> StiffElasAssembling3DP1OptV2(nq=1331, nme=6000)
  run ( 1/ 1) : cputime=0.049666(s) - matrix 3993-by-3993
...
CubeMesh(70):
-> StiffElasAssembling3DP1OptV1(nq=357911, nme=2058000)
  run ( 1/ 1) : cputime=785.353305(s) - matrix 1073733-by-1073733

```

We also obtain

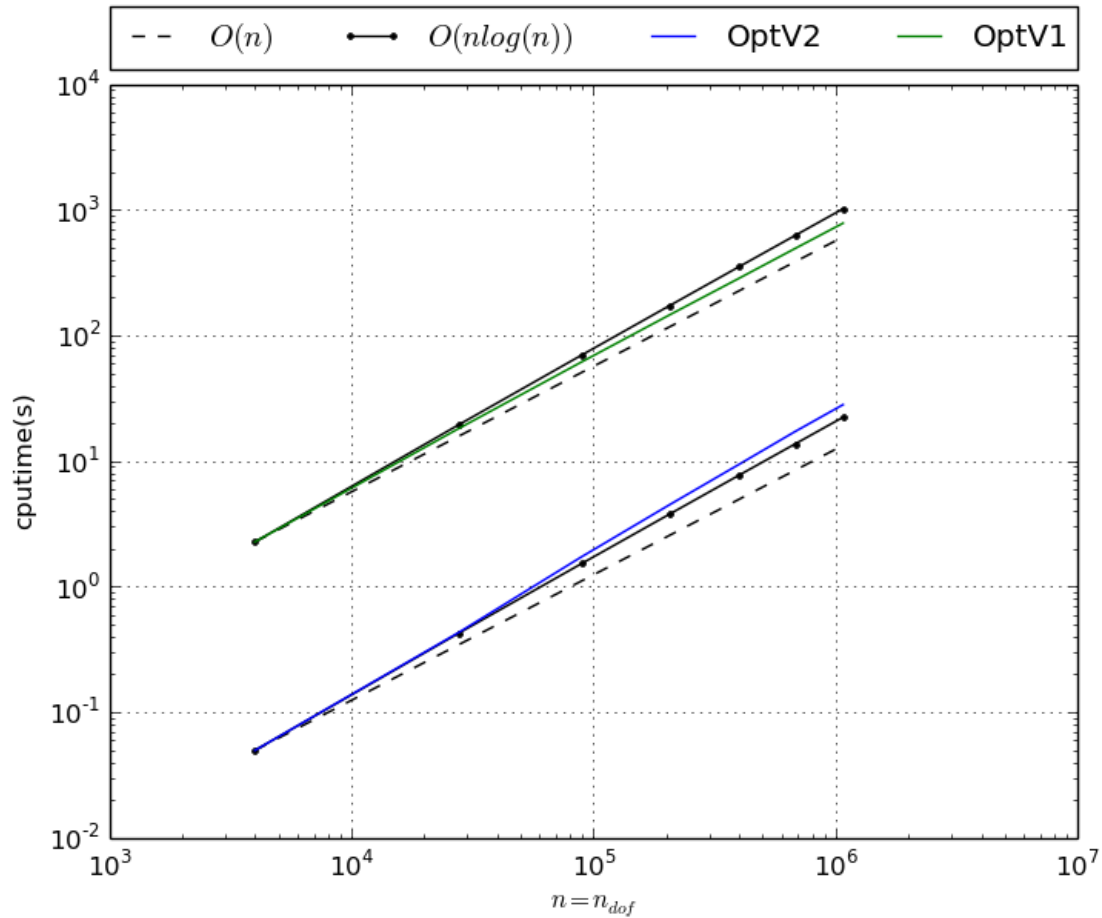


Figure 3.6: StiffElasAssembling3DP1 benchmark

FEM2D MODULE

Author Francois Cuvelier <cuvelier@math.univ-paris13.fr>

Date 15/09/2013

Contains functions to build some finite element matrices using P_1 -Lagrange finite elements on a 2D mesh. Each assembly matrix is computed by three different versions called `base`, `OptV1` and `OptV2` (see [here](#))

Contents

- Assembly matrices (versions `base`, `OptV1` and `OptV2`)
 - Mass Matrix
 - Stiffness Matrix
 - Stiffness Elasticity Matrix
- Elementary matrices (used by versions `base` and `OptV1`)
 - Element Mass Matrix
 - Element Stiffness Matrix
 - Element Stiffness Elasticity Matrix
- Vectorized tools (used by version `OptV2`)
 - Vectorized computation of basis functions gradients
- Vectorized elementary matrices (used by version `OptV2`)
 - Element Mass Matrix
 - Element Stiffness Matrix
 - Element Stiffness Elasticity Matrix
- Mesh

4.1 Assembly matrices (versions base, OptV1 and OptV2)

Let $\mathcal{T}_h$ be a triangular mesh of Ω . We note $\Omega_h = \bigcup_{T_k \in \mathcal{T}_h} T_k$ a triangulation of Ω with the following structure data:

name	type	dimension	description	Python
n_q	integer	1	number of vertices	<code>nq</code>
n_{me}	integer	1	number of elements	<code>nme</code>
q	double	$2 \times n_q$	array of vertices coordinates. $q(\nu, j)$ is the ν -th coordinate of the j -th vertex, $\nu \in \{1, 2\}$, $j \in \{1, \dots, n_q\}$. The j -th vertex will be also denoted by q^j	<code>q (transposed)</code> <code>q[j-1] = q^j</code>
me	integer	$3 \times n_{me}$	connectivity array. $me(\beta, k)$ is the storage index of the β -th vertex of the k -th element, in the array q , for $\beta \in \{1, 2, 3\}$ and $k \in \{1, \dots, n_{me}\}$	<code>me (transposed)</code>
$areas$	double	$1 \times n_{me}$	array of areas. $areas(k)$ is the k -th triangle area, $k \in \{1, \dots, n_{me}\}$	<code>areas</code>

The P_1 -Lagrange basis functions associated with Ω_h are noted φ_i for all $i \in \{1, \dots, n_q\}$ and are defined by

$$\varphi_i(q^j) = \delta_{i,j}, \quad \forall (i, j) \in \{1, \dots, n_q\}^2$$

We also define the global *alternate* basis $\mathcal{B}_a$ by

$$\mathcal{B}_a = \{\psi_1, \dots, \psi_{2n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \end{pmatrix}, \begin{pmatrix} \varphi_2 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_{n_q} \end{pmatrix} \right\}$$

and the global *block* basis $\mathcal{B}_b$ by

$$\mathcal{B}_b = \{\phi_1, \dots, \phi_{2n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_2 \\ 0 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2 \end{pmatrix}, \dots, \begin{pmatrix} 0 \\ \varphi_{n_q} \end{pmatrix} \right\}.$$

4.1.1 Mass Matrix

Assembly of the Mass Matrix by P_1 -Lagrange finite elements using respectively version base, OptV1 and OptV2 (see report). The Mass Matrix $\mathbb{M}$ is given by

$$\mathbb{M}_{i,j} = \int_{\Omega_h} \varphi_i(q) \varphi_j(q) dq, \quad \forall (i, j) \in \{1, \dots, n_q\}^2.$$

Note: generic syntax:

```
M = MassAssembling2DP1<version>(nq, nme, me, areas)
```

- `nq`: total number of nodes of the mesh, also denoted by n_q ,
- `nme`: total number of triangles, also denoted by n_{me} ,
- `me`: Connectivity array, $(n_{me}, 3)$ array,

- `areas`: Array of areas, (`nme`,) array,
- **return** a *Scipy* CSC sparse matrix of size $n_q \times n_q$

where `<version>` is `base`, `OptV1` or `OptV2`

Benchmarks of these functions are presented in *Mass Matrix*. We give a simple usage :

```
>>> from pyOptFEM.FEM2D import *
>>> Th=SquareMesh(5)
>>> Mbase = MassAssembling2DP1base(Th.nq,Th.nme,Th.me,Th.areas)
>>> MOptV1= MassAssembling2DP1OptV1(Th.nq,Th.nme,Th.me,Th.areas)
>>> print(" NormInf(Mbase-MOptV1)=%e " % NormInf(Mbase-MOptV1))
NormInf(Mbase-MOptV1)=6.938894e-18
>>> MOptV2= MassAssembling2DP1OptV2(Th.nq,Th.nme,Th.me,Th.areas)
>>> print(" NormInf(Mbase-MOptV2)=%e " % NormInf(Mbase-MOptV2))
NormInf(Mbase-MOptV2)=6.938894e-18
```

We can show sparsity of the Mass matrix :

```
>>> from pyOptFEM.FEM2D import *
>>> Th=SquareMesh(20)
>>> M=MassAssembling2DP1base(Th.nq,Th.nme,Th.me,Th.areas)
>>> showSparsity(M)
```

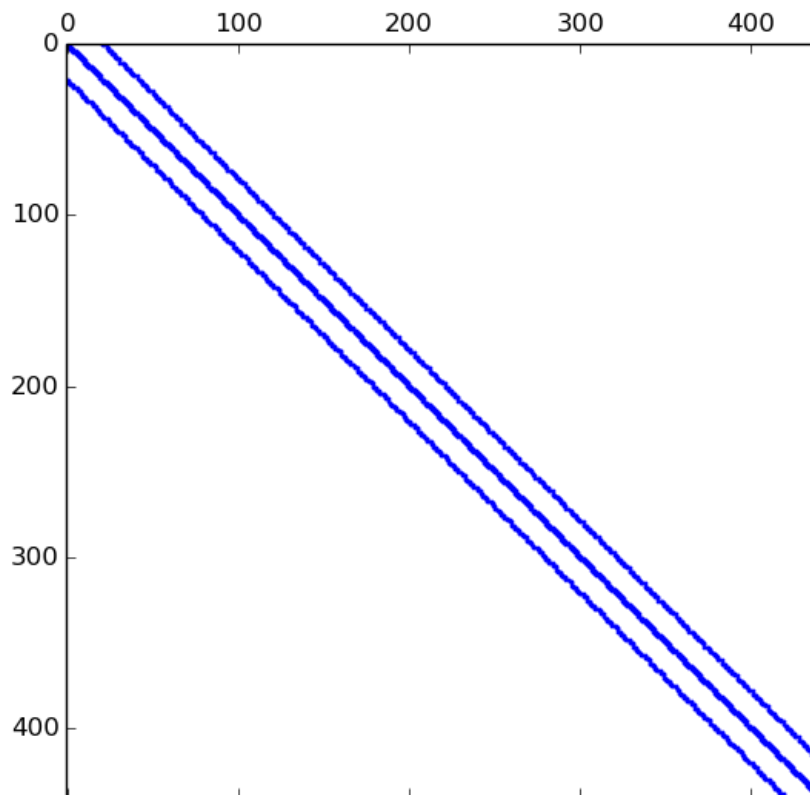


Figure 4.1: Sparsity of Mass Matrix generated with command `showSparsity(M)`

Note: sources code

```
pyOptFEM.FEM2D.assembly.MassAssembling2DP1base (nq, nme, me, areas)
    Assembly of the Mass Matrix by  $P_1$ -Lagrange finite elements using base version (see report).

pyOptFEM.FEM2D.assembly.MassAssembling2DP1OptV1 (nq, nme, me, areas)
    Assembly of the Mass Matrix by  $P_1$ -Lagrange finite elements using OptV1 version (see report).

pyOptFEM.FEM2D.assembly.MassAssembling2DP1OptV2 (nq, nme, me, areas)
    Assembly of the Mass Matrix by  $P_1$ -Lagrange finite elements using OptV2 version (see report).
```

4.1.2 Stiffness Matrix

Assembly of the Stiffness Matrix by P_1 -Lagrange finite elements using respectively version base, OptV1 and OptV2 (see report). The Stiff Matrix $\mathbb{S}$ is given by

$$\mathbb{S}_{i,j} = \int_{\Omega_h} \nabla \varphi_i(q) \cdot \nabla \varphi_j(q) dq, \quad \forall (i,j) \in \{1, \dots, n_q\}^2.$$

Note: generic syntax:

```
M = StiffAssembling2DP1<version>(nq, nme, q, me, areas)
```

- nq: total number of nodes of the mesh, also denoted by n_q ,
- nme: total number of triangles, also denoted by n_{me} ,
- q: Array of vertices coordinates, $(nq, 2)$ array
- me: Connectivity array, $(nme, 3)$ array,
- areas: Array of areas, $(nme,)$ array,
- **return** a *Scipy* CSC sparse matrix of size $n_q \times n_q$

where <version> is base, OptV1 or OptV2

Benchmarks of theses functions are presented in *Stiffness Matrix*. We give a simple usage :

```
>>> pyOptFEM.FEM2D import *
>>> Th=SquareMesh(5)
>>> Sbase = StiffAssembling2DP1base(Th.nq,Th.nme,Th.q,Th.me,Th.areas)
>>> SOptV1= StiffAssembling2DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.areas)
>>> print(" NormInf(Sbase-SOptV1)=%e " % NormInf(Sbase-SOptV1))
NormInf(Sbase-SOptV1)=0.000000e+00
>>> SOptV2= StiffAssembling2DP1OptV2(Th.nq,Th.nme,Th.q,Th.me,Th.areas)
>>> print(" NormInf(Sbase-SOptV2)=%e " % NormInf(Sbase-SOptV2))
NormInf(Sbase-SOptV1)=4.440892e-16
```

Note: sources code

```
pyOptFEM.FEM2D.assembly.StiffAssembling2DP1base (nq, nme, q, me, areas)
    Assembly of the Stiff Matrix by  $P_1$ -Lagrange finite elements using base version (see report).

pyOptFEM.FEM2D.assembly.StiffAssembling2DP1OptV1 (nq, nme, q, me, areas)
    Assembly of the Stiff Matrix by  $P_1$ -Lagrange finite elements using OptV1 version (see report).
```

`pyOptFEM.FEM2D.assembly.StiffAssembling2DP1OptV2` (*nq, nme, q, me, areas*)
 Assembly of the Stiff Matrix by P_1 -Lagrange finite elements using OptV2 version (see report).

4.1.3 Stiffness Elasticity Matrix

Assembly of the Stiffness Elasticity Matrix by P_1 -Lagrange finite elements using respectively version base, OptV1 and OptV2 (see report). The Stiffness Elasticity Matrix $\mathbb{K}$ is given by

$$\mathbb{K}_{m,l} = \int_{\Omega_h} \underline{\epsilon}^t(\psi_m(q)) \underline{\sigma}(\psi_l(q)), \quad \forall (m, l) \in \{1, \dots, 2n_q\}^2.$$

where $\underline{\sigma} = (\sigma_{xx}, \sigma_{yy}, \sigma_{xy})^t$ and $\underline{\epsilon} = (\epsilon_{xx}, \epsilon_{yy}, \epsilon_{xy})^t$ are the elastic stress and strain tensors respectively.

Note: generic syntax:

```
M = StiffElasAssembling2DP1<version>(nq,nme,q,me,areas,la,mu,Num)
```

- **nq**: total number of nodes of the mesh, also denoted by n_q ,
- **nme**: total number of triangles, also denoted by n_{me} ,
- **q**: **array of vertices coordinates**,
 - ($n_q, 2$) array for base and OptV1,
 - ($2, n_q$) array for OptV2 version,
- **me**: **Connectivity array**,
 - ($nme, 3$) array for base and OptV1,
 - ($3, nme$) array for OptV2 version,
- **areas**: ($nme, 1$) array of areas,
- **la**: the first Lamé coefficient in Hooke's law, denoted by λ ,
- **mu**: the second Lamé coefficient in Hooke's law, denoted by μ ,
- **Num**:
 - 0: global alternate numbering with local alternate numbering (classical method),
 - 1: global block numbering with local alternate numbering,
 - 2: global alternate numbering with local block numbering,
 - 3: global block numbering with local block numbering.
- **return** a *Scipy* CSC sparse matrix of size $2n_q \times 2n_q$

where <version> is base, OptV1 or OptV2

Benchmarks of these functions are presented in *Stiffness Elasticity Matrix*. We give a simple usage :

```
>>> from pyOptFEM.FEM2D import *
>>> Th=SquareMesh(5)
>>> Kbase = StiffElasAssembling2DP1base(Th.nq,Th.nme,Th.q,Th.me,Th.areas,2,0.5,0)
>>> KOptV1= StiffElasAssembling2DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.areas,2,0.5,0)
>>> print(" NormInf(Kbase-KOptV1)=%e " % NormInf(Kbase-KOptV1))
NormInf(Kbase-KOptV1)=8.881784e-16
```

```
>>> KOptV2= StiffElasAssembling2DP1OptV2(Th.nq,Th.nme,Th.q,Th.me,Th.areas,2,0.5,0)
>>> print(" NormInf(Kbase-KOptV2)=%e " % NormInf(Kbase-KOptV2))
NormInf(Kbase-KOptV2)=1.776357e-15
```

We now illustrate the consequences of the choice of the global basis on matrix sparsity

- global *alternate* basis $\mathcal{B}_a$ (Num=0 or Num=2)

```
>>> from pyOptFEM.FEM2D import *
>>> Th=SquareMesh(15)
>>> K0=StiffElasAssembling2DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.areas,2,0.5,0)
>>> showSparsity(K0)
```

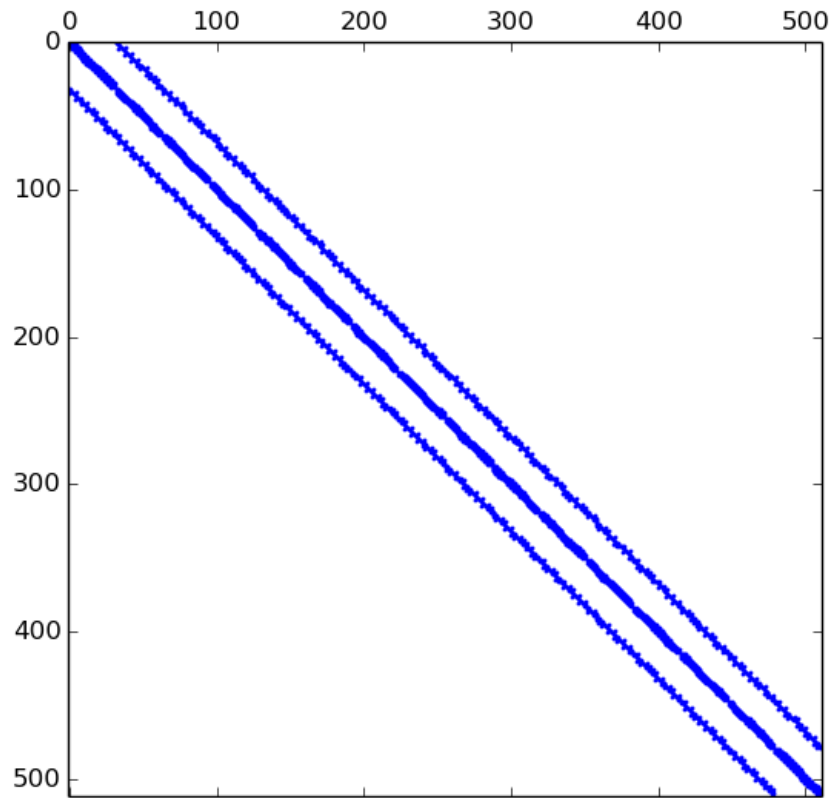


Figure 4.2: Sparsity of Stiffness Elasticity Matrix generated with global alternate numbering (Num=0 or 2)

```
>>> K3=StiffElasAssembling2DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.areas,2,0.5,3)
>>> showSparsity(K3)
```

- global *block* basis $\mathcal{B}_a$ (Num=1 or Num=3)

Note: sources code

```
pyOptFEM.FEM2D.assembly.StiffElasAssembling2DP1base(nq, nme, q, me, areas, la, mu,
                                                       Num)
    Assembly of the Stiffness Elasticity Matrix by  $P_1$ -Lagrange finite elements using OptV2 version (see report).
```

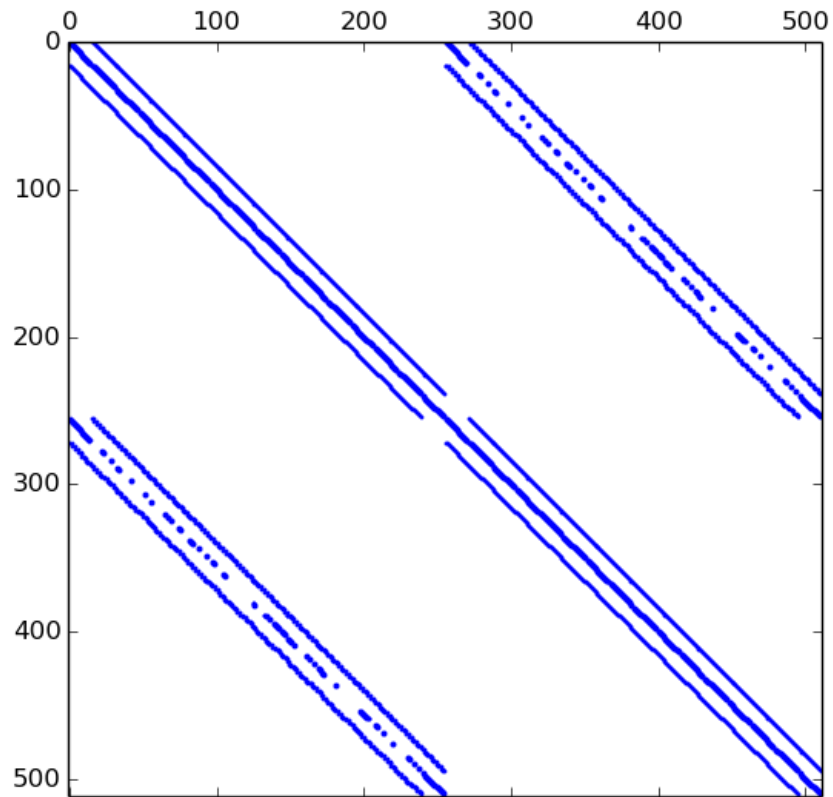


Figure 4.3: Sparsity of Stiffness Elasticity Matrix generated with global block numbering (Num=1 or 3)

`pyOptFEM.FEM2D.assembly.StiffElasAssembling2DP1OptV1` (*nq, nme, q, me, areas, la, mu, Num*)

Assembly of the Stiffness Elasticity Matrix by P_1 -Lagrange finite elements using OptV1 version (see report).

`pyOptFEM.FEM2D.assembly.StiffElasAssembling2DP1OptV2` (*nq, nme, q, me, areas, la, mu, Num*)

Assembly of the Stiffness Elasticity Matrix by P_1 -Lagrange finite elements using OptV2 version (see report).

4.2 Elementary matrices (used by versions base and OptV1)

Let T be a triangle, of area $|T|$ and with $\mathbf{q}^1, \mathbf{q}^2$ and $\mathbf{q}^3$ its three vertices. We denote by $\tilde{\varphi}_1, \tilde{\varphi}_2$ and $\tilde{\varphi}_3$ the P_1 -Lagrange local basis functions such that $\tilde{\varphi}_i(\mathbf{q}^j) = \delta_{i,j}$, $\forall (i, j) \in \{1, 2, 3\}^2$.

We also define the local *alternate* basis $\tilde{\mathcal{B}}_a$ by

$$\tilde{\mathcal{B}}_a = \{\tilde{\psi}_1, \dots, \tilde{\psi}_6\} = \left\{ \begin{pmatrix} \tilde{\varphi}_1 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_1 \end{pmatrix}, \begin{pmatrix} \tilde{\varphi}_2 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_2 \end{pmatrix}, \begin{pmatrix} \tilde{\varphi}_3 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_3 \end{pmatrix} \right\}$$

and the local *block* basis $\tilde{\mathcal{B}}_b$ by

$$\tilde{\mathcal{B}}_b = \{\tilde{\phi}_1, \dots, \tilde{\phi}_6\} = \left\{ \begin{pmatrix} \tilde{\varphi}_1 \\ 0 \end{pmatrix}, \begin{pmatrix} \tilde{\varphi}_2 \\ 0 \end{pmatrix}, \begin{pmatrix} \tilde{\varphi}_3 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_1 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_2 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_3 \end{pmatrix} \right\}.$$

The **elasticity tensor**, $\mathbb{H}$, obtained from Hooke's law with an isotropic material, defined with the Lamé parameters λ and μ is given by

$$\mathbb{H} = \begin{pmatrix} \lambda + 2\mu & \lambda & 0 \\ \lambda & \lambda + 2\mu & 0 \\ 0 & 0 & \mu \end{pmatrix}$$

and, for a function $\mathbf{u} = (u_1, u_2)$ the strain tensors is given by

$$\underline{\epsilon}(\mathbf{u}) = \left(\frac{\partial u_1}{\partial x}, \frac{\partial u_2}{\partial y}, \frac{\partial u_2}{\partial x} + \frac{\partial u_1}{\partial y} \right)^t$$

4.2.1 Element Mass Matrix

The element Mass matrix, $\mathbb{M}^e(T)$, for the triangle T , is defined by

$$\mathbb{M}_{i,j}^e(T) = \int_T \tilde{\varphi}_i(\mathbf{q}) \tilde{\varphi}_j(\mathbf{q}) d\mathbf{q}, \quad \forall (i, j) \in \{1, 2, 3\}^2$$

We obtain :

$$\mathbb{M}^e(T) = \frac{|T|}{12} \begin{pmatrix} 2 & 1 & 1 \\ 1 & 2 & 1 \\ 1 & 1 & 2 \end{pmatrix} \quad (4.1)$$

Note:

`pyOptFEM.FEM2D.elemMatrix.ElemMassMat2DP1 (area)`

Compute element Mass matrix, $\mathbb{M}^e(T)$ for a given triangle T of area $|T|$

Parameters `area (float)` – area of the triangle.

Returns 3×3 *numpy* array of floats.

4.2.2 Element Stiffness Matrix

The element Stiffness matrix, $\mathbb{S}^e(T)$, for the T is defined by

$$\mathbb{S}_{i,j}^e(T) = \int_T \langle \nabla \tilde{\varphi}_i(\mathbf{q}), \nabla \tilde{\varphi}_j(\mathbf{q}) \rangle d\mathbf{q}, \quad (i, j) \in \{1, 2, 3\}^2$$

We have :

$$\mathbb{S}^e(T) = \frac{1}{4|T|} \begin{pmatrix} \langle \mathbf{u}, \mathbf{u} \rangle & \langle \mathbf{u}, \mathbf{v} \rangle & \langle \mathbf{u}, \mathbf{w} \rangle \\ \langle \mathbf{v}, \mathbf{u} \rangle & \langle \mathbf{v}, \mathbf{v} \rangle & \langle \mathbf{v}, \mathbf{w} \rangle \\ \langle \mathbf{w}, \mathbf{u} \rangle & \langle \mathbf{w}, \mathbf{v} \rangle & \langle \mathbf{w}, \mathbf{w} \rangle \end{pmatrix}.$$

where $\mathbf{u} = \mathbf{q}^2 - \mathbf{q}^3$, $\mathbf{v} = \mathbf{q}^3 - \mathbf{q}^1$ and $\mathbf{w} = \mathbf{q}^1 - \mathbf{q}^2$.

Note:

`pyOptFEM.FEM2D.elemMatrix.ElemStiffMat2DP1 (q1, q2, q3, area)`

Compute element Stiffness matrix, $\mathbb{S}^e(T)$ for a given triangle T

Parameters

- **q1,q2,q3** (2×1 *numpy* array) – the three vertices of the triangle,
- **area (float)** – area of the triangle.

Returns

Type 3×3 *numpy* array of floats.

4.2.3 Element Stiffness Elasticity Matrix

Let $\mathbf{u} = \mathbf{q}^2 - \mathbf{q}^3$, $\mathbf{v} = \mathbf{q}^3 - \mathbf{q}^1$ and $\mathbf{w} = \mathbf{q}^1 - \mathbf{q}^2$.

- The element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given triangle T in the local *alternate* basis $\tilde{\mathcal{B}}_a$ is defined by

$$\mathbb{K}_{i,j}^e(T) = \int_T \underline{\epsilon}(\tilde{\boldsymbol{\psi}}_j)^t(\mathbf{q}) \mathbb{H} \underline{\epsilon}(\tilde{\boldsymbol{\psi}}_i)(\mathbf{q}) d\mathbf{q}, \quad \forall (i, j) \in \{1, \dots, 6\}^2.$$

We also have

$$\mathbb{K}^e(T) = \frac{1}{4|T|} \mathbb{B}^t \mathbb{H} \mathbb{B}$$

where $\mathbb{H}$ is the elasticity tensor and

$$\mathbb{B} = \begin{pmatrix} u_2 & 0 & v_2 & 0 & w_2 & 0 \\ 0 & -u_1 & 0 & -v_1 & 0 & -w_1 \\ -u_1 & u_2 & -v_1 & v_2 & -w_1 & w_2 \end{pmatrix}$$

Note:

`pyOptFEM.FEM2D.elemMatrix.ElemStiffElasMat2DP1Ba` (*ql*, *area*, *H*)

Return the element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given triangle T in the local *alternate* basis $\mathcal{B}_a$

Parameters

- **ql** (3×2 *numpy* array) – contains the three vertices of the triangle : `ql[0]`, `ql[1]` and `ql[2]`,
- **area** (*float*) – area of the triangle ,
- **H** (3×3 *numpy* array) – Elasticity tensor, $\mathbb{H}$.

Returns $\mathbb{K}^e(T)$ in $\mathcal{B}_a$ basis.

Type 6×6 *numpy* array of floats.

- The element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given triangle T in the local *block* basis $\tilde{\mathcal{B}}_b$ is defined by

$$\mathbb{K}_{i,j}^e(T) = \int_T \underline{\epsilon}(\tilde{\phi}_j)^t(\mathbf{q}) \mathbb{H} \underline{\epsilon}(\tilde{\phi}_i)(\mathbf{q}) d\mathbf{q}, \quad \forall (i, j) \in \{1, \dots, 6\}^2.$$

We also have

$$\mathbb{K}^e(T) = \frac{1}{4|T|} \mathbb{B}^t \mathbb{H} \mathbb{B}$$

where $\mathbb{H}$ is the elasticity tensor and

$$\mathbb{B} = \begin{pmatrix} u_2 & v_2 & w_2 & 0 & 0 & 0 \\ 0 & 0 & 0 & -u_1 & -v_1 & -w_1 \\ -u_1 & -v_1 & -w_1 & u_2 & v_2 & w_2 \end{pmatrix}$$

Note:

`pyOptFEM.FEM2D.elemMatrix.ElemStiffElasMat2DP1Bb` (*ql*, *area*, *H*)

Return the element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given triangle T in the local *block* basis $\mathcal{B}_b$

Parameters

- **ql** (3×2 *numpy* array) – contains the three vertices of the triangle : `ql[0]`, `ql[1]` and `ql[2]`,
- **area** (*float*) – area of the triangle,
- **H** (3×3 *numpy* array) – Elasticity tensor, $\mathbb{H}$.

Returns $\mathbb{K}^e(T)$ in $\mathcal{B}_b$ basis.

Type 6×6 *numpy* array of floats

4.3 Vectorized tools (used by version OptV2)

4.3.1 Vectorized computation of basis functions gradients

By construction, the gradients of basis functions are constants on each element T_k . So, we denote, $\forall \alpha \in \{1, \dots, 3\}$, by $\mathbf{G}^\alpha$ the $2 \times n_{me}$ array defined, $\forall k \in \{1, \dots, n_{me}\}$, by

$$\mathbf{G}^\alpha(:, k) = \nabla \varphi_{me(\alpha, k)}(\mathbf{q}), \quad \forall \mathbf{q} \in T_k.$$

On a triangle T_k , we denote by $\mathbf{D}^{12} = \mathbf{q}^{me(1, k)} - \mathbf{q}^{me(2, k)}$, $\mathbf{D}^{13} = \mathbf{q}^{me(1, k)} - \mathbf{q}^{me(3, k)}$ and $\mathbf{D}^{23} = \mathbf{q}^{me(2, k)} - \mathbf{q}^{me(3, k)}$. Then, we have

$$\nabla \varphi_1^k(\mathbf{q}) = \frac{1}{2|T_k|} \begin{pmatrix} \mathbf{D}_y^{23} \\ -\mathbf{D}_x^{23} \end{pmatrix}, \quad \nabla \varphi_2^k(\mathbf{q}) = \frac{1}{2|T_k|} \begin{pmatrix} -\mathbf{D}_y^{13} \\ \mathbf{D}_x^{13} \end{pmatrix}, \quad \nabla \varphi_3^k(\mathbf{q}) = \frac{1}{2|T_k|} \begin{pmatrix} \mathbf{D}_y^{12} \\ -\mathbf{D}_x^{12} \end{pmatrix}.$$

With these formulas, we obtain the vectorized algorithm given in Algorithm 4.4.

Algorithm 4.4

Input :

$\mathbf{q}$: array of vertices coordinates ($2 \times n_{me}$)
 $\mathbf{me}$: connectivity array ($3 \times n_{me}$)
 $\mathbf{areas}$: array of mesh elements areas ($1 \times n_{me}$)

Output :

$\mathbf{G}^1, \mathbf{G}^2, \mathbf{G}^3$: gradients arrays ($2 \times n_{me}$)
 $\mathbf{G}^\alpha(:, k) = \nabla \varphi_\alpha^k(\mathbf{q}), \quad \forall \alpha \in \{1, \dots, 3\}$

Function: $[\mathbf{G}^1, \mathbf{G}^2, \mathbf{G}^3] \leftarrow \text{GRADIENTVEC2D}(\mathbf{q}, \mathbf{me}, \mathbf{areas})$

$\mathbf{D}^{12} \leftarrow \mathbf{q}(:, \mathbf{me}(1, :)) - \mathbf{q}(:, \mathbf{me}(2, :))$

$\triangleright 2 \times n_{me}$ array

$\mathbf{D}^{13} \leftarrow \mathbf{q}(:, \mathbf{me}(1, :)) - \mathbf{q}(:, \mathbf{me}(3, :))$

$\triangleright 2 \times n_{me}$ array

$\mathbf{D}^{23} \leftarrow \mathbf{q}(:, \mathbf{me}(2, :)) - \mathbf{q}(:, \mathbf{me}(3, :))$

$\triangleright 2 \times n_{me}$ array

$\mathbf{G}^1 \leftarrow \begin{pmatrix} \mathbf{D}^{23}(2, :)/(2 * \mathbf{areas}) \\ -\mathbf{D}^{23}(1, :)/(2 * \mathbf{areas}) \end{pmatrix}$

$\triangleright 2 \times n_{me}$ array

$\mathbf{G}^2 \leftarrow \begin{pmatrix} -\mathbf{D}^{13}(2, :)/(2 * \mathbf{areas}) \\ \mathbf{D}^{13}(1, :)/(2 * \mathbf{areas}) \end{pmatrix}$

$\triangleright 2 \times n_{me}$ array

$\mathbf{G}^3 \leftarrow \begin{pmatrix} \mathbf{D}^{12}(2, :)/(2 * \mathbf{areas}) \\ -\mathbf{D}^{12}(1, :)/(2 * \mathbf{areas}) \end{pmatrix}$

$\triangleright 2 \times n_{me}$ array

end Function:

Figure 4.4: Vectorized algorithm for computation of basis functions gradients in 2d

4.4 Vectorized elementary matrices (used by version OptV2)

4.4.1 Element Mass Matrix

We have

$$\mathbb{M}^e(T_k) = \frac{|T_k|}{12} \begin{pmatrix} 2 & 1 & 1 \\ 1 & 2 & 1 \\ 1 & 1 & 2 \end{pmatrix}$$

Then with $\mathbb{K}_g$ definition (see Section *New Optimized assembling algorithm (version OptV2)*), we obtain

$$\mathbb{K}_g(3(i-1) + j, k) = |T_k| \frac{1 + \delta_{i,j}}{12} \quad 1 \leq i, j \leq 3,$$

We represent in figure 4.5 the corresponding row-wise operations.

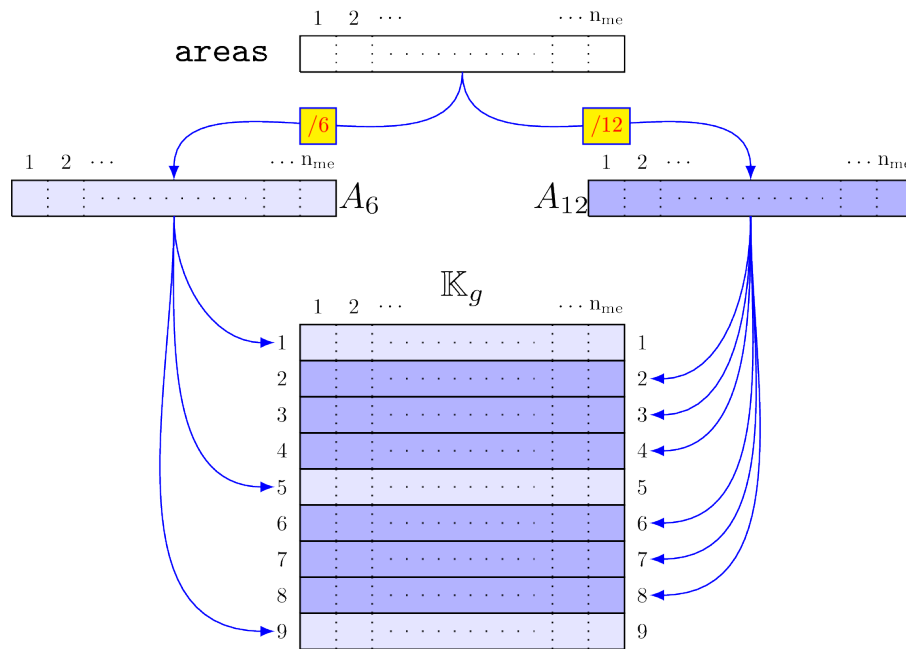


Figure 4.5: Build of $\mathbb{K}_g$ associated to 2d **Mass** matrix in

So the vectorized algorithm for $\mathbb{K}_g$ computation is simple and given in Algorithm 4.6.

Algorithm 4.6

Note:

`pyOptFEM.FEM2D.elemMatrixVec.ElemMassMat2DP1Vec (areas)`

Compute all the elementaries Mass matrices, $\mathbb{M}^e(T_k)$ for $k \in \{0, \dots, n_{me} - 1\}$

Parameters `areas` (n_{me} *numpy* array of floats) – areas of all the mesh elements.

Algorithm 1 $\mathbb{K}_g$ associated to Mass matrix in 2d

Function: $\mathbb{K}_g \leftarrow \text{ELEMMASSMAT2DP1VEC}(\text{n}_{\text{me}}, \text{areas})$
 $\mathbb{K}_g \leftarrow \mathbf{O}_{9 \times \text{n}_{\text{me}}}$ ▷ $9 \times \text{n}_{\text{me}}$ array of zeros
 $\mathbb{K}_g(1, :) \leftarrow \mathbb{K}_g(5, :) \leftarrow \mathbb{K}_g(9, :) \leftarrow \text{areas}/12$
 $\mathbb{K}_g(2, :) \leftarrow \mathbb{K}_g(3, :) \leftarrow \mathbb{K}_g(4, :) \leftarrow \mathbb{K}_g(6, :) \leftarrow \mathbb{K}_g(7, :) \leftarrow \mathbb{K}_g(8, :) \leftarrow \text{areas}/6$
end Function:

Figure 4.6: Vectorized algorithm for $\mathbb{K}_g$ associated to 2d **Mass** matrix

Returns a one dimensional *numpy* array of size 9n_{me}

4.4.2 Element Stiffness Matrix

We have $\forall(\alpha, \beta) \in \{1, \dots, 3\}^2$

$$\mathbb{S}_{\alpha, \beta}^e(T_k) = |T_k| \langle \nabla \varphi_{\beta}^k, \nabla \varphi_{\alpha}^k \rangle.$$

Using vectorized algorithm function `GRADIENTVEC2D` given in Algorithm 4.4, we obtain the vectorized algorithm 4.7 for $\mathbb{K}_g$ computation of the **Stiffness** matrix in 2d.

Algorithm 4.7

1: **Function:** $\mathbb{K}_g \leftarrow \text{ELEMSTIFFMAT2DP1VEC}(\text{n}_{\text{me}}, \text{q}, \text{me}, \text{areas})$
2: $[G^1, G^2, G^3] \leftarrow \text{GRADIENTVEC2D}(\text{me}, \text{areas})$
3: $\mathbb{K}_g \leftarrow \mathbf{O}_{9 \times \text{n}_{\text{me}}}$ ▷ $9 \times \text{n}_{\text{me}}$ array of zeros
4: $\mathbb{K}_g(1, :) \leftarrow \text{areas} \cdot \text{SUM}(G^1 \cdot G^1, 1)$
5: $\mathbb{K}_g(2, :) \leftarrow \mathbb{K}_g(2, :) \leftarrow \text{areas} \cdot \text{SUM}(G^1 \cdot G^2, 1)$
6: $\mathbb{K}_g(3, :) \leftarrow \mathbb{K}_g(7, :) \leftarrow \text{areas} \cdot \text{SUM}(G^1 \cdot G^3, 1)$
7: $\mathbb{K}_g(5, :) \leftarrow \text{areas} \cdot \text{SUM}(G^2 \cdot G^2, 1)$
8: $\mathbb{K}_g(6, :) \leftarrow \mathbb{K}_g(8, :) \leftarrow \text{areas} \cdot \text{SUM}(G^2 \cdot G^3, 1)$
9: $\mathbb{K}_g(9, :) \leftarrow \text{areas} \cdot \text{SUM}(G^3 \cdot G^3, 1)$
10: **end Function:**

Figure 4.7: Vectorized algorithm for $\mathbb{K}_g$ associated to 2d **Stiffness** matrix**Note:**

`pyOptFEM.FEM2D.elemMatrixVec.ElemStiffMat2DP1Vec` (*nme*, *q*, *me*, *areas*)

Compute all the elementaries Stiff matrices, $\mathbb{S}^e(T_k)$ for $k \in \{0, \dots, \text{n}_{\text{me}} - 1\}$

Parameters

- **nme** (*int*) – number of mesh elements,
- **q** ($\text{n}_q \times 2$ *numpy* array of floats) – mesh vertices,
- **me** ($\text{n}_{\text{me}} \times 3$ *numpy* array of integers) – mesh connectivity,

- **areas** (n_{me} *numpy* array of floats) – areas of all the mesh elements.

Returns a one dimensional *numpy* array of size $9n_{me}$

4.4.3 Element Stiffness Elasticity Matrix

- We define on T_k the local *alternate* basis $\mathcal{B}_a^k$ by

$$\mathcal{B}_a^k = \{\boldsymbol{\psi}_1^k, \dots, \boldsymbol{\psi}_6^k\} = \left\{ \begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1^k \end{pmatrix}, \begin{pmatrix} \varphi_2^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2^k \end{pmatrix}, \begin{pmatrix} \varphi_3^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_3^k \end{pmatrix} \right\}$$

where $\varphi_\alpha^k = \varphi_{me(\alpha,k)}$. With notations of [Presentation](#), we have $\forall (\alpha, \beta) \in \{1, \dots, 6\}^2$

$$\mathbb{K}_{\alpha,\beta}^e(T_k) = \int_{T_k} \underline{\epsilon}^t(\boldsymbol{\psi}_\beta^k) \mathbb{C} \underline{\epsilon}(\boldsymbol{\psi}_\alpha^k) d\mathbf{q} = \int_{T_k} \mathcal{H}(\boldsymbol{\psi}_\beta^k, \boldsymbol{\psi}_\alpha^k)(\mathbf{q}) d\mathbf{q}$$

with, $\forall \mathbf{u} = (u_1, u_2) \in H^1(\Omega)^2$, $\forall \mathbf{v} = (v_1, v_2) \in H^1(\Omega)^2$,

$$\begin{aligned} \mathcal{H}(\mathbf{u}, \mathbf{v}) &= \left\langle \begin{pmatrix} \gamma & 0 \\ 0 & \mu \end{pmatrix} \nabla u_1, \nabla v_1 \right\rangle + \left\langle \begin{pmatrix} 0 & \lambda \\ \mu & 0 \end{pmatrix} \nabla u_2, \nabla v_1 \right\rangle \\ &+ \left\langle \begin{pmatrix} 0 & \mu \\ \lambda & 0 \end{pmatrix} \nabla u_1, \nabla v_2 \right\rangle + \left\langle \begin{pmatrix} \mu & 0 \\ 0 & \gamma \end{pmatrix} \nabla u_2, \nabla v_2 \right\rangle \end{aligned} \quad (4.2)$$

For example, we can compute explicitly the first two terms in the first column of $\mathbb{K}^e(T_k)$ which are given by

$$\begin{aligned} \mathbb{K}_{1,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\boldsymbol{\psi}_1^k, \boldsymbol{\psi}_1^k)(\mathbf{q}) d\mathbf{q} \\ &= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix} \right) (\mathbf{q}) d\mathbf{q} \\ &= |T_k| \left\langle \begin{pmatrix} \gamma & 0 \\ 0 & \mu \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_1^k \right\rangle = |T_k| \left(\gamma \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_1^k}{\partial x} + \mu \frac{\partial \varphi_1^k}{\partial y} \frac{\partial \varphi_1^k}{\partial y} \right). \end{aligned}$$

and

$$\begin{aligned} \mathbb{K}_{2,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\boldsymbol{\psi}_1^k, \boldsymbol{\psi}_2^k)(\mathbf{q}) d\mathbf{q} \\ &= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1^k \end{pmatrix} \right) (\mathbf{q}) d\mathbf{q} \\ &= |T_k| \left\langle \begin{pmatrix} 0 & \mu \\ \lambda & 0 \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_1^k \right\rangle = |T_k| (\lambda + \mu) \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_1^k}{\partial y}. \end{aligned}$$

Using vectorized algorithm function `GRADIENTVEC2D` given in [Algorithm 4.4](#), we obtain the vectorized algorithm [4.7](#) for $\mathbb{K}_g$ computation of the **Elasticity Stiffness** matrix in 2d.

Algorithm 4.8

Note:

`pyOptFEM.FEM2D.elemMatrixVec.ElemStiffElasMatBaVec2DP1` (nme , q , me , $areas$, L , M)

Compute all the elementaries Stiffness elasticity matrices, $\mathbb{K}^e(T_k)$ for $k \in \{0, \dots, n_{me} - 1\}$ in local *alternate* basis.

```

1: Function:  $\mathbb{K}_g \leftarrow \text{ELEMSTIFFELASMATBAVEC2DP1}(\text{nme}, \text{q}, \text{me}, \text{areas}, \lambda, \mu)$ 
2:    $[\mathbf{G}^1, \mathbf{G}^2, \mathbf{G}^3] \leftarrow \text{GRADIENTVEC2D}(\text{q}, \text{me}, \text{areas})$ 
3:    $\mathbb{K}_g \leftarrow \mathbf{0}_{36 \times \text{nme}}$ 
4:    $\mathbb{K}_g(1, :) \leftarrow ((\lambda + 2\mu) * \mathbf{G}^1(1, :). * \mathbf{G}^1(1, :) + \mu \mathbf{G}^1(2, :). \mathbf{G}^1(2, :)). * \text{areas}$ 
5:    $\mathbb{K}_g(2, :) \leftarrow (\lambda + \mu) * \mathbf{G}^1(1, :). * \mathbf{G}^1(2, :). * \text{areas}$ 
6:    $\vdots$ 
7:    $\mathbb{K}_g(30, :) \leftarrow (\lambda + \mu) * \mathbf{G}^3(1, :). * \mathbf{G}^3(2, :). * \text{areas}$ 
8:    $\mathbb{K}_g(36, :) \leftarrow ((\lambda + 2\mu) * \mathbf{G}^3(2, :). * \mathbf{G}^3(2, :) + \mu \mathbf{G}^3(1, :). * \mathbf{G}^3(1, :)). * \text{areas}$ 
9:    $\mathbb{K}_g([7, 13, 14, 19, 20, 21, 25, 26, 27, 28, 31, 32, 33, 34, 35], :)$ 
      $\leftarrow \mathbb{K}_g([2, 3, 9, 4, 10, 16, 5, 11, 17, 23, 6, 12, 18, 24, 30], :)$ 
10: end Function:

```

Figure 4.8: Vectorized algorithm for $\mathbb{K}_g$ associated to 2d **Elasticity Stiffness** matrix

Parameters

- **nme** (*int*) – number of mesh elements,
- **q** ($(2, \text{nq})$ *numpy* array of floats) – mesh vertices,
- **me** ($(3, \text{nme})$ *numpy* array of integers) – mesh connectivity,
- **areas** ($(\text{nme},)$ *numpy* array of floats) – areas of all the mesh elements.
- **L** – the λ Lamé parameter,
- **L** – the μ Lamé parameter.

Returns a $(36 * \text{nme},)$ *numpy* array of floats.

- We define on T_k the local *block* basis $\mathcal{B}_b^k$ by

$$\mathcal{B}_b^k = \{\phi_1^k, \dots, \phi_6^k\} = \left\{ \begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_2^k \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_3^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1^k \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2^k \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_3^k \end{pmatrix} \right\}$$

where $\varphi_\alpha^k = \varphi_{\text{me}(\alpha, k)}$.

For example, using formula (4.2), we can explicitly compute the first two terms in the first column of $\mathbb{K}^e(T_k)$ which are given by

$$\begin{aligned} \mathbb{K}_{1,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\phi_1^k, \phi_1^k)(\mathbf{q}) d\mathbf{q} \\ &= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix} \right) (\mathbf{q}) d\mathbf{q} \\ &= |T_k| \left\langle \begin{pmatrix} \gamma & 0 \\ 0 & \mu \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_1^k \right\rangle = |T_k| \left(\gamma \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_1^k}{\partial x} + \mu \frac{\partial \varphi_1^k}{\partial y} \frac{\partial \varphi_1^k}{\partial y} \right). \end{aligned}$$

and

$$\begin{aligned}
\mathbb{K}_{2,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\phi_1^k, \phi_2^k)(q) dq \\
&= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_2^k \\ 0 \end{pmatrix} \right) (q) dq \\
&= |T_k| \left\langle \begin{pmatrix} \gamma & 0 \\ 0 & \mu \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_2^k \right\rangle = |T_k| \left(\gamma \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_2^k}{\partial x} + \mu \frac{\partial \varphi_1^k}{\partial y} \frac{\partial \varphi_2^k}{\partial y} \right).
\end{aligned}$$

Using vectorized algorithm function `GRADIENTVEC2D` given in Algorithm 4.4, we obtain the vectorized algorithm 4.9 for $\mathbb{K}_g$ computation of the **Elasticity Stiffness** matrix in 2d.

Algorithm 4.9

```

1: Function:  $\mathbb{K}_g \leftarrow \text{ELEMSTIFFELASMATBBVEC2DP1}(n_{me}, q, me, areas, \lambda, \mu)$ 
2:  $[G^1, G^2, G^3] \leftarrow \text{GRADIENTVEC2D}(q, me, areas)$ 
3:  $\mathbb{K}_g \leftarrow \mathbb{O}_{36 \times n_{me}}$ 
4:  $\mathbb{K}_g(1, :) \leftarrow ((\lambda + 2\mu) * G^1(1, :). * G^1(1, :) + \mu G^1(2, :).G^1(2, :)). * areas$ 
5:  $\mathbb{K}_g(2, :) \leftarrow ((\lambda + 2\mu) * G^1(1, :). * G^2(1, :) + \mu G^1(2, :).G^2(2, :)). * areas$ 
6:  $\vdots$ 
7:  $\mathbb{K}_g(30, :) \leftarrow ((\lambda + \mu) * G^2(2, :). * G^3(2, :) + \mu G^1(1, :).G^3(1, :)). * areas$ 
8:  $\mathbb{K}_g(36, :) \leftarrow ((\lambda + 2\mu) * G^3(2, :). * G^3(2, :) + \mu G^3(1, :). * G^3(1, :)). * areas$ 
9:  $\mathbb{K}_g([7, 13, 14, 19, 20, 21, 25, 26, 27, 28, 31, 32, 33, 34, 35], :)$ 
    $\leftarrow \mathbb{K}_g([2, 3, 9, 4, 10, 16, 5, 11, 17, 23, 6, 12, 18, 24, 30], :)$ 
10: end Function:

```

Figure 4.9: Vectorized algorithm for $\mathbb{K}_g$ associated to 2d **Elasticity Stiffness** matrix

Note:

`pyOptFEM.FEM2D.elemMatrixVec.ElemStiffElasMatBbVec2DP1` (*nme*, *q*, *me*, *areas*, *L*, *M*)

Compute all the elementaries Stiffness elasticity matrices, $\mathbb{K}^e(T_k)$ for $k \in \{0, \dots, n_{me} - 1\}$ in local *block* basis.

Parameters

- **nme** (*int*) – number of mesh elements,
- **q** ((2, nq) *numpy* array of floats) – mesh vertices,
- **me** ((3, nme) *numpy* array of integers) – mesh connectivity,
- **areas** ((nme,) *numpy* array of floats) – areas of all the mesh elements.
- **L** – the λ Lamé parameter,
- **L** – the μ Lamé parameter.

Returns a (36*nme,) *numpy* array of floats.

4.5 Mesh

`class pyOptFEM.FEM2D.mesh.SquareMesh(N, **kwargs)`

Build meshes of the unit square $[0, 1] \times [0, 1]$. Class attributes are :

- **nq**, total number of mesh vertices (points), also denoted n_q .
- **nme**, total number of mesh elements (triangles in 2d),
- **version**, mesh structure version,
- **q**, *Numpy* array of vertices coordinates, dimension $(n_q, 2)$ (*version 0*) or $(2, n_q)$ (*version 1*).
 $q[j]$ (*version 0*) or $q[:, j]$ (*version 1*) are the two coordinates of the j -th vertex, $j \in \{0, \dots, n_q - 1\}$
- **me**, *Numpy* connectivity array, dimension $(nme, 3)$ (*version 0*) or $(3, nme)$ (*version 1*).
 $me[k]$ (*version 0*) or $me[:, k]$ (*version 1*) are the storage index of the three vertices of the k -th triangle in the array q of vertices coordinates, $k \in \{0, \dots, nme - 1\}$.
- **areas**, Array of mesh elements areas, $(nme,)$ *Numpy* array.
 $areas[k]$ is the area of k -th triangle, k in $\text{range}(0, nme)$

Parameters **N** – points number on each sides of the square

optional parameter : `version=0` or `version=1`

```
>>> from pyOptFEM.FEM2D import *
>>> Th=SquareMesh(3)
>>> Th.nme,Th.nq
(18, 16)
>>> Th.q
array([[ 0.          ,  0.          ],
       [ 0.33333333,  0.          ],
       [ 0.66666667,  0.          ],
       [ 1.          ,  0.          ],
       [ 0.          ,  0.33333333],
       [ 0.33333333,  0.33333333],
       [ 0.66666667,  0.33333333],
       [ 1.          ,  0.33333333],
       [ 0.          ,  0.66666667],
       [ 0.33333333,  0.66666667],
       [ 0.66666667,  0.66666667],
       [ 1.          ,  0.66666667],
       [ 0.          ,  1.          ],
       [ 0.33333333,  1.          ],
       [ 0.66666667,  1.          ],
       [ 1.          ,  1.          ]])
>>> PlotMesh(Th)
```

`class pyOptFEM.FEM2D.mesh.getMesh(meshfile, **kwargs)`

Read a *FreeFEM++* mesh from file `meshfile`. Class attributes are :

- **nq**, total number of mesh vertices (points), also denoted n_q .
- **nme**, total number of mesh elements (triangles in 2d),
- **version**, mesh structure version,
- **q**, *Numpy* array of vertices coordinates, dimension $(n_q, 2)$ (*version 0*) or $(2, n_q)$ (*version 1*).
 $q[j]$ (*version 0*) or $q[:, j]$ (*version 1*) are the two coordinates of the j -th vertex, $j \in \{0, \dots, n_q - 1\}$

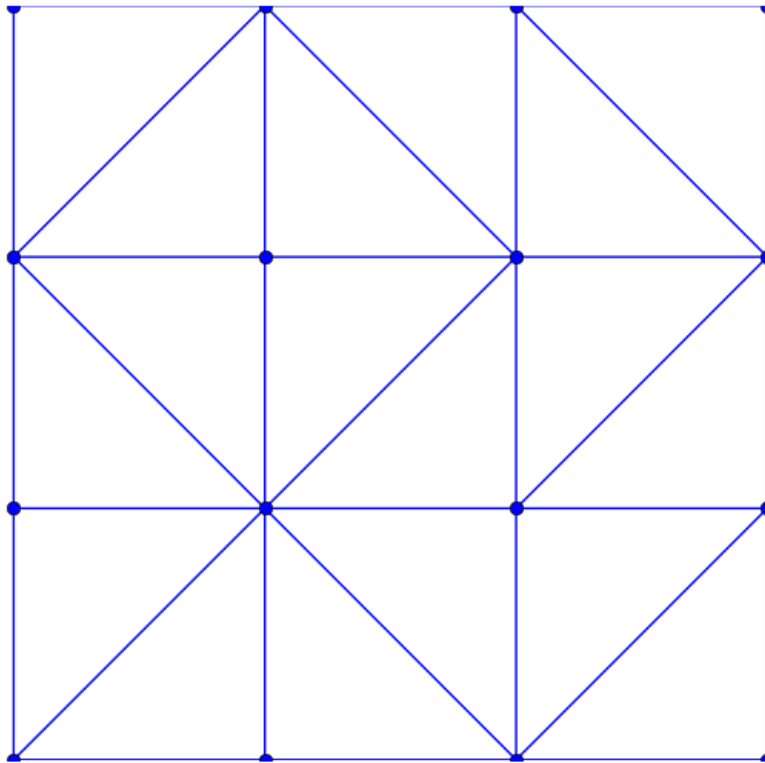


Figure 4.10: SquareMesh(3) visualisation

•**me**, *Numpy* connectivity array, dimension $(nme, 3)$ (*version 0*) or $(3, nme)$ (*version 1*).

$me[k]$ (*version 0*) or $me[:, k]$ (*version 1*) are the storage index of the three vertices of the k -th triangle in the array q of vertices coordinates, $k \in \{0, \dots, nme - 1\}$.

•**areas**, Array of mesh elements areas, $(nme,)$ *Numpy* array.

$areas[k]$ is the area of k -th triangle, k in $range(0, nme)$

Parameters **N** – points number on each sides of the square

optional parameter : `version=0` or `version=1`

```
>>> from pyOptFEM.FEM2D import *
>>> Th=getMesh('mesh/disk4-1-5.msh')
>>> PlotMesh(Th)
```

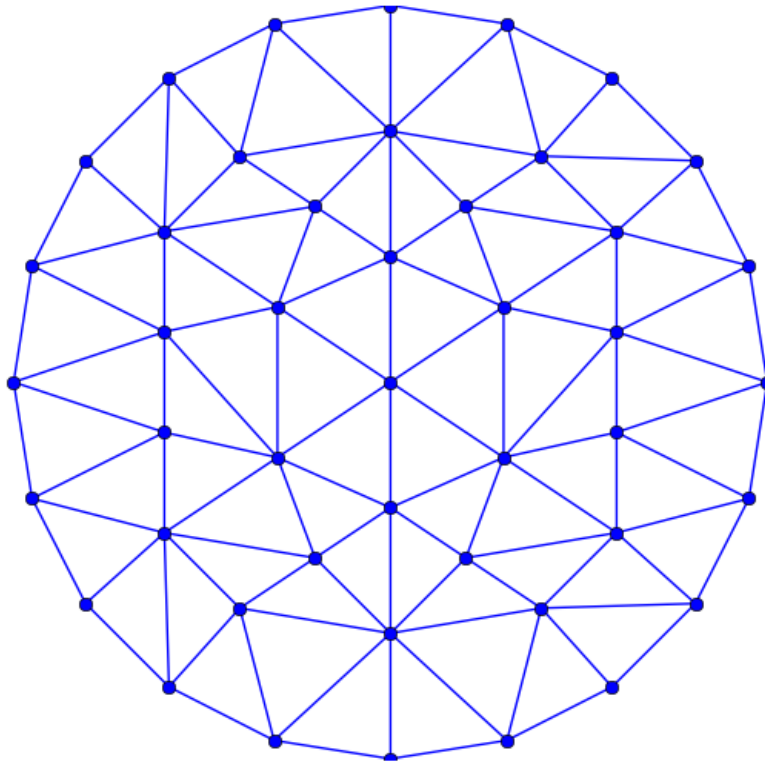


Figure 4.11: Visualisation of a *FreeFEM++* mesh (disk unit)

FEM3D MODULE

Author Francois Cuvelier <cuvelier@math.univ-paris13.fr>

Date 15/09/2013

Contains functions to build some finite element matrices using P_1 -Lagrange finite elements on a 3D mesh. Each assembly matrix is computed by three different versions called `base`, `OptV1` and `OptV2` (see [here](#))

Contents

- Assembly matrix (versions `base`, `OptV1` and `OptV2`)
 - Mass Matrix
 - Stiffness Matrix
 - Stiffness Elasticity Matrix
- Elementary matrix (used by versions `base` and `OptV1`)
 - Element Mass Matrix
 - Element Stiffness Matrix
 - Element Stiffness Elasticity Matrix
- Vectorized tools (used by version `OptV2`)
 - Vectorized computation of basis functions gradients
- Vectorized elementary matrix (used by version `OptV2`)
 - Element Mass Matrix
 - Element Stiffness Matrix
 - Element Stiffness Elasticity Matrix
- Mesh

5.1 Assembly matrix (versions base, OptV1 and OptV2)

Let Ω_h be a tetrahedral mesh of Ω corresponding to the following structure data:

name	type	dimension	description	Python
n_q	integer	1	number of vertices	<code>nq</code>
n_{me}	integer	1	number of elements	<code>nme</code>
q	double	$3 \times n_q$	array of vertices coordinates. $q(\nu, j)$ is the ν -th coordinate of the j -th vertex, $\nu \in \{1, 2, 3\}$, $j \in \{1, \dots, n_q\}$. The j -th vertex will be also denoted by q^j	<code>q</code> (transposed) <code>q[j-1] = q^j</code>
me	integer	$4 \times n_{me}$	connectivity array. $me(\beta, k)$ is the storage index of the β -th vertex of the k -th element, in the array q , for $\beta \in \{1, \dots, 4\}$ and $k \in \{1, \dots, n_{me}\}$	<code>me</code> (transposed)
$volumes$	double	$1 \times n_{me}$	array of volumes. $volumes(k)$ is the k -th tetrahedron volume, $k \in \{1, \dots, n_{me}\}$	<code>volumes</code>

The P_1 -Lagrange basis functions associated with Ω_h are denoted by φ_i for all $i \in \{1, \dots, n_q\}$ and are defined by

$$\varphi_i(q^j) = \delta_{i,j}, \quad \forall (i, j) \in \{1, \dots, n_q\}^2$$

We also define the global *alternate* basis $\mathcal{B}_a$ by

$$\mathcal{B}_a = \{\psi_1, \dots, \psi_{3n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_1 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_{n_q} \end{pmatrix} \right\}$$

and the global *block* basis $\mathcal{B}_b$ by

$$\mathcal{B}_b = \{\phi_1, \dots, \phi_{3n_q}\} = \left\{ \begin{pmatrix} \varphi_1 \\ 0 \\ 0 \end{pmatrix}, \dots, \begin{pmatrix} \varphi_{n_q} \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1 \\ 0 \end{pmatrix}, \dots, \begin{pmatrix} 0 \\ \varphi_{n_q} \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_1 \end{pmatrix}, \dots, \begin{pmatrix} 0 \\ 0 \\ \varphi_{n_q} \end{pmatrix} \right\}.$$

5.1.1 Mass Matrix

Assembly of the Mass Matrix by P_1 -Lagrange finite elements using respectively version base, OptV1 and OptV2 (see report). The Mass Matrix $\mathbb{M}$ is given by

$$\mathbb{M}_{i,j} = \int_{\Omega_h} \varphi_i(q) \varphi_j(q) dq, \quad \forall (i, j) \in \{1, \dots, n_q\}^2.$$

Note: generic syntax:

```
M = MassAssembling3DP1<version>(nq, nme, me, volumes)
```

- `nq`: total number of nodes of the mesh, also denoted by n_q ,
- `nme`: total number of tetrahedra, also denoted by n_{me} ,

- `me`: Connectivity array, $(n_{me}, 4)$ array,
- `volumes`: Array of tetrahedra volumes, $(n_{me},)$ array,
- **return** a *Scipy* CSC sparse matrix of size $n_q \times n_q$

where `<version>` is `base`, `OptV1` or `OptV2`

```
>>> from pyOptFEM.FEM3D import *
>>> Th=CubeMesh(5)
>>> Mbase = MassAssembling3DP1base(Th.nq,Th.nme,Th.me,Th.volumes)
>>> MOptV1= MassAssembling3DP1OptV1(Th.nq,Th.nme,Th.me,Th.volumes)
>>> print(" NormInf(Mbase-MOptV1)=%e " % NormInf(Mbase-MOptV1))
NormInf(Mbase-MOptV1)=1.734723e-18
>>> MOptV2= MassAssembling3DP1OptV2(Th.nq,Th.nme,Th.me,Th.volumes)
>>> print(" NormInf(Mbase-MOptV2)=%e " % NormInf(Mbase-MOptV2))
NormInf(Mbase-MOptV2)=1.734723e-18
```

We can show sparsity of the Mass matrix :

```
>>> from pyOptFEM.FEM3D import *
>>> Th=CubeMesh(5)
>>> M=MassAssembling3DP1OptV2(Th.nq,Th.nme,Th.me,Th.areas)
>>> showSparsity(M)
```

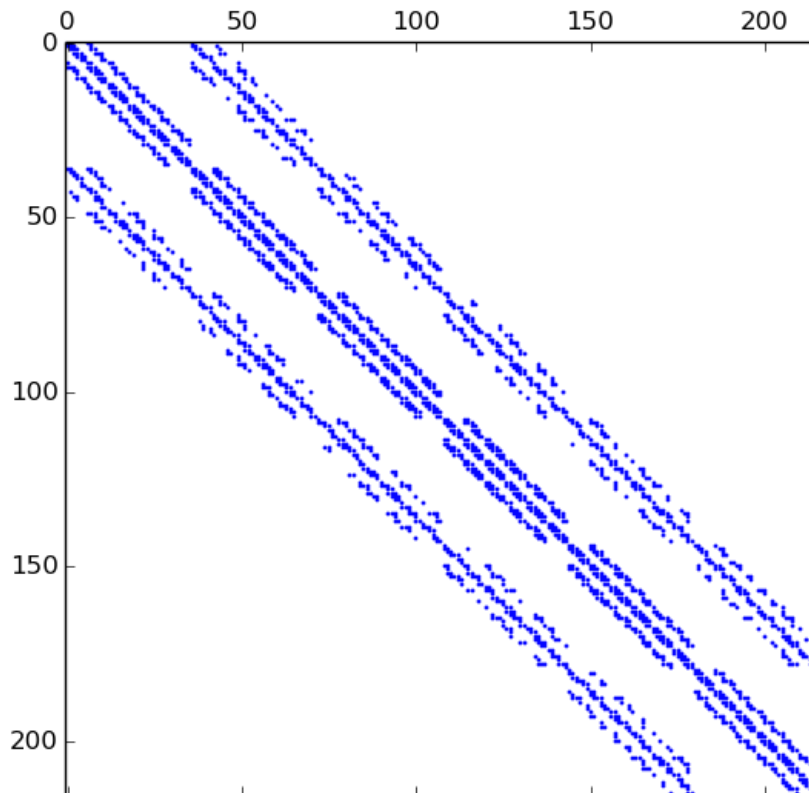


Figure 5.1: Sparsity of Mass Matrix generated with command `showSparsity(M)`

Note: sources code

```
pyOptFEM.FEM3D.assembly.MassAssembling3DP1base (nq, nme, me, volumes)
    Assembly of the Mass Matrix by  $P_1$ -Lagrange finite elements using base version (see report).

pyOptFEM.FEM3D.assembly.MassAssembling3DP1OptV1 (nq, nme, me, volumes)
    Assembly of the Mass Matrix by  $P_1$ -Lagrange finite elements using OptV1 version (see report).

pyOptFEM.FEM3D.assembly.MassAssembling3DP1OptV2 (nq, nme, me, volumes)
    Assembly of the Mass Matrix by  $P_1$ -Lagrange finite elements using OptV2 version (see report).
```

5.1.2 Stiffness Matrix

Assembly of the Stiffness Matrix by P_1 -Lagrange finite elements using respectively version base, OptV1 and OptV2 (see report). The Stiff Matrix $\mathbb{S}$ is given by

$$\mathbb{S}_{i,j} = \int_{\Omega_h} \nabla \varphi_i(q) \cdot \nabla \varphi_j(q) dq, \quad \forall (i,j) \in \{1, \dots, n_q\}^2.$$

Note: generic syntax

M=StiffAssembling3DP1<version> (nq, nme, q, me, volumes)
Compute the **stiffness** sparse matrix where <version> is base, OptV1 or OptV2

Parameters

- **nq** – total number of nodes of the mesh, also denoted by n_q ,
- **nme** – total number of tetrahedra, also denoted by n_{me} ,
- **q** (*numpy* array of float) –
array of vertices coordinates,
 - (nq, 3) array for base and OptV1 versions,
 - (3, nq) array for OptV2 version,
- **me** (*numpy* array of int) –
Connectivity array,
 - (nme, 4) array for base and OptV1 versions,
 - (4, nme) array for OptV2 version,
- **volumes** (*numpy* array of floats,) – (nme,) array of tetrahedra volumes,

Returns a *Scipy* CSC sparse matrix of size $2n_q \times 2n_q$

Benchmarks of theses functions are presented in [Stiffness Matrix](#). We give a simple usage :

```
>>> from pyOptFEM.FEM3D import *
>>> Th=CubeMesh(5)
>>> Sbase = StiffAssembling3DP1base(Th.nq,Th.nme,Th.q,Th.me,Th.volumes)
>>> SOptV1= StiffAssembling3DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.volumes)
>>> print(" NormInf(Sbase-SOptV1)=%e " % NormInf(Sbase-SOptV1))
NormInf(Sbase-SOptV1)=2.220446e-15
```

```
>>> SOptV2= StiffAssembling3DP1OptV2(Th.nq,Th.nme,Th.q,Th.me,Th.volumes)
>>> print(" NormInf(Sbase-SOptV2)=%e " % NormInf(Sbase-SOptV2))
NormInf(Sbase-SOptV2)=2.220446e-15
```

Note: sources code

```
pyOptFEM.FEM3D.assembly.StiffAssembling3DP1base(nq,nme,q,me,volumes)
    Assembly of the Stiff Matrix by  $P_1$ -Lagrange finite elements using base version (see report).

pyOptFEM.FEM3D.assembly.StiffAssembling3DP1OptV1(nq,nme,q,me,volumes)
    Assembly of the Stiff Matrix by  $P_1$ -Lagrange finite elements using OptV1 version (see report).

pyOptFEM.FEM3D.assembly.StiffAssembling3DP1OptV2(nq,nme,q,me,volumes)
    Assembly of the Stiff Matrix by  $P_1$ -Lagrange finite elements using OptV2 version (see report).
```

5.1.3 Stiffness Elasticity Matrix

Assembly of the Stiffness Elasticity Matrix by P_1 -Lagrange finite elements using respectively version base, OptV1 and OptV2 (see report). The Stiffness Elasticity Matrix $\mathbb{K}$ is given by

$$\mathbb{K}_{m,l} = \int_{\Omega_h} \underline{\epsilon}^t(\psi_m(q)) \underline{\sigma}(\psi_l(q)), \quad \forall (m,l) \in \{1, \dots, 3n_q\}^2.$$

where $\underline{\sigma} = (\sigma_{xx}, \sigma_{yy}, \sigma_{zz}, \sigma_{xy}, \sigma_{yz}, \sigma_{xz})^t$ and $\underline{\epsilon} = (\epsilon_{xx}, \epsilon_{yy}, \epsilon_{zz}, 2\epsilon_{xy}, 2\epsilon_{yz}, 2\epsilon_{xz})^t$ are the elastic stress and strain tensors respectively.

Note: generic syntax

M=StiffElasAssembling3DP1<version>(nq,nme,q,me,volumes,la,mu,Num)
 Compute the **elasticity stiffness** sparse matrix where <version> is base, OptV1 or OptV2

Parameters

- **nq** – total number of nodes of the mesh,
- **nme** – total number of tetrahedrons,
- **q** (*numpy* array of float) –
vertices coordinates,
 - (nq, 3) array for base and OptV1 versions,
 - (3, nq) array for OptV2 version,
- **me** (*numpy* array of int) –
connectivity array,
 - (nme, 4) array for base and OptV1 versions,
 - (4, nme) array for OptV2 version,
- **volumes** (*numpy* array of floats,) – (nme,) array of tetrahedra volumes,
- **la** – the first Lamé coefficient in Hooke's law, denoted by λ ,
- **mu** – the second Lamé coefficient in Hooke's law, denoted by μ ,
- **Num** –

- 0 global alternate numbering with local alternate numbering (classical method),
- 1 global block numbering with local alternate numbering,
- 2 global alternate numbering with local block numbering,
- 3 global block numbering with local block numbering.

Returns a *Scipy* CSC sparse matrix of size $3nq \times 3nq$

```
>>> from pyOptFEM.FEM3D import *
>>> Th=CubeMesh(5)
>>> Kbase = StiffElasAssembling3DP1base(Th.nq,Th.nme,Th.q,Th.me,Th.volumes,2,0.5,0)
>>> KOptV1= StiffElasAssembling3DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.volumes,2,0.5,0)
>>> print(" NormInf(Kbase-KOptV1)=%e " % NormInf(Kbase-KOptV1))
NormInf(Kbase-KOptV1)=1.332268e-15
>>> KOptV2= StiffElasAssembling3DP1OptV2(Th.nq,Th.nme,Th.q,Th.me,Th.volumes,2,0.5,0)
>>> print(" NormInf(Kbase-KOptV2)=%e " % NormInf(Kbase-KOptV2))
NormInf(Kbase-KOptV2)=1.332268e-15
```

We now illustrate the consequences of the choice of the global basis on matrix sparsity

- global *alternate* basis $\mathcal{B}_a$ (Num=0 or Num=2)

```
>>> from pyOptFEM.FEM3D import *
>>> Th=CubeMesh(5)
>>> K0=StiffElasAssembling3DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.volumes,2,0.5,0)
>>> showSparsity(K0)
```

- global *block* basis $\mathcal{B}_a$ (Num=1 or Num=3)

```
>>> K3=StiffElasAssembling3DP1OptV1(Th.nq,Th.nme,Th.q,Th.me,Th.volumes,2,0.5,3)
>>> showSparsity(K3)
```

Note: sources code

`pyOptFEM.FEM3D.assembly.StiffElasAssembling3DP1base` (*nq, nme, q, me, volumes, la, mu,*
Num)

Assembly of the Stiffness Elasticity Matrix by P_1 -Lagrange finite elements using base version (see report).

`pyOptFEM.FEM3D.assembly.StiffElasAssembling3DP1OptV1` (*nq, nme, q, me, volumes, la, mu,*
Num)

Assembly of the Stiffness Elasticity Matrix by P_1 -Lagrange finite elements using OptV1 version (see report).

`pyOptFEM.FEM3D.assembly.StiffElasAssembling3DP1OptV2` (*nq, nme, q, me, volumes, la, mu,*
Num)

Assembly of the Stiffness Elasticity Matrix by P_1 -Lagrange finite elements using OptV2 version (see report).

5.2 Elementary matrix (used by versions base and OptV1)

Let T be a tetrahedron, of volume $|T|$ and with $\tilde{q}^1, \tilde{q}^2, \tilde{q}^3$ and $\tilde{q}^4$ its four vertices. We denote by $\tilde{\varphi}_1, \tilde{\varphi}_2, \tilde{\varphi}_3$ and $\tilde{\varphi}_4$ the P_1 -Lagrange local basis functions such that $\tilde{\varphi}_i(\mathbf{q}^j) = \delta_{i,j}, \forall (i,j) \in \{1, \dots, 4\}^2$.

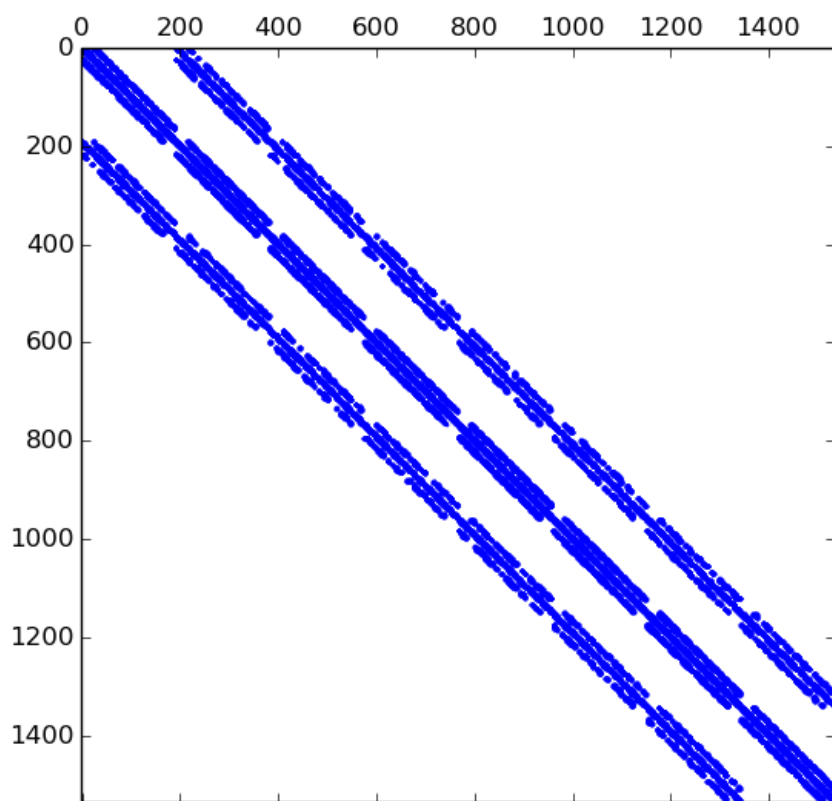


Figure 5.2: Sparsity of Stiffness Elasticity Matrix generated with global alternate numbering (Num=0 or 2)

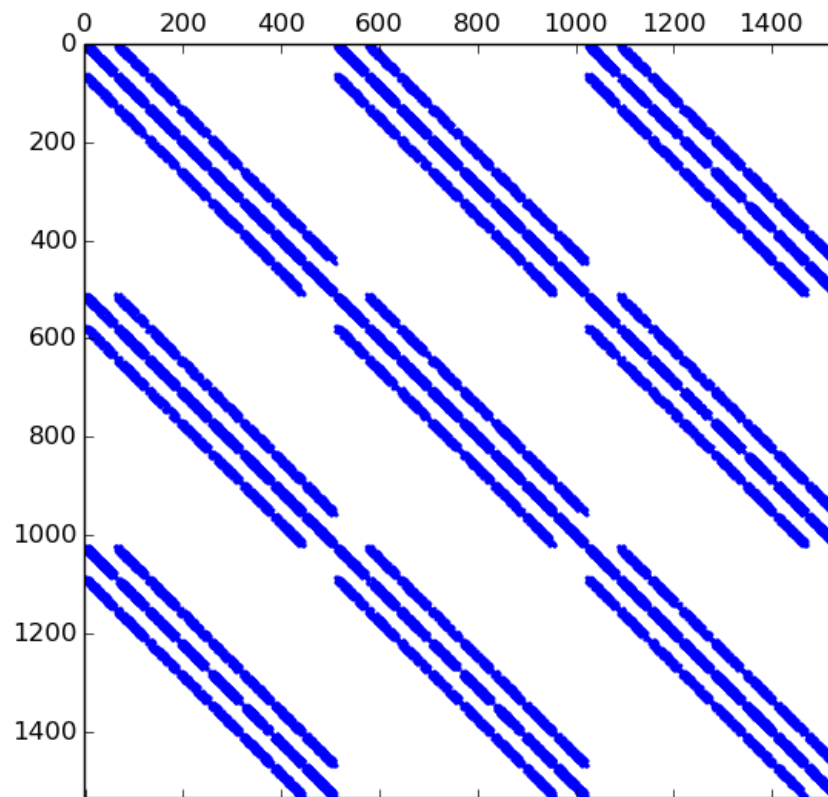


Figure 5.3: Sparsity of Stiffness Elasticity Matrix generated with global block numbering (Num=1 or 3)

We also define the local *alternate* basis $\tilde{\mathcal{B}}_a$ by

$$\tilde{\mathcal{B}}_a = \{\tilde{\psi}_1, \dots, \tilde{\psi}_{12}\} = \left\{ \begin{pmatrix} \tilde{\varphi}_1 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_1 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \tilde{\varphi}_1 \end{pmatrix}, \dots, \begin{pmatrix} \tilde{\varphi}_4 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \tilde{\varphi}_4 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \tilde{\varphi}_4 \end{pmatrix} \right\}$$

and the local *block* basis $\tilde{\mathcal{B}}_b$ by

$$\tilde{\mathcal{B}}_b = \{\tilde{\phi}_1, \dots, \tilde{\phi}_{12}\} = \left\{ \begin{pmatrix} \tilde{\varphi}_1 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \tilde{\varphi}_2 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \tilde{\varphi}_3 \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \tilde{\varphi}_4 \\ 0 \\ 0 \end{pmatrix}, \dots, \begin{pmatrix} 0 \\ 0 \\ \tilde{\varphi}_1 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \tilde{\varphi}_2 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \tilde{\varphi}_3 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \tilde{\varphi}_4 \end{pmatrix} \right\}.$$

The **elasticity tensor**, $\mathbb{H}$, obtained from Hooke's law with an isotropic material, defined with the Lamé parameters λ and μ is given by

$$\mathbb{H} = \begin{pmatrix} \lambda + 2\mu & \lambda & \lambda & 0 & 0 & 0 \\ \lambda & \lambda + 2\mu & \lambda & 0 & 0 & 0 \\ \lambda & \lambda & \lambda + 2\mu & 0 & 0 & 0 \\ 0 & 0 & 0 & \mu & 0 & 0 \\ 0 & 0 & 0 & 0 & \mu & 0 \\ 0 & 0 & 0 & 0 & 0 & \mu \end{pmatrix}$$

and, for a function $\mathbf{u} = (u_1, u_2, u_3)$ the strain tensors is given by

$$\boldsymbol{\epsilon}(\mathbf{u}) = \left(\frac{\partial u_1}{\partial x}, \frac{\partial u_2}{\partial y}, \frac{\partial u_3}{\partial z}, \frac{\partial u_2}{\partial x} + \frac{\partial u_1}{\partial y}, \frac{\partial u_2}{\partial z} + \frac{\partial u_3}{\partial y}, \frac{\partial u_1}{\partial z} + \frac{\partial u_3}{\partial x} \right)^t$$

5.2.1 Element Mass Matrix

The element Mass matrix, $\mathbb{M}^e(T)$, for the tetrahedron T , is defined by

$$\mathbb{M}_{i,j}^e(T) = \int_T \tilde{\varphi}_i(\mathbf{q}) \tilde{\varphi}_j(\mathbf{q}) d\mathbf{q}, \quad \forall (i, j) \in \{1, 2, 3, 4\}^2$$

We obtain :

$$\mathbb{M}^e(T) = \frac{|T|}{20} \begin{pmatrix} 2 & 1 & 1 & 1 \\ 1 & 2 & 1 & 1 \\ 1 & 1 & 2 & 1 \\ 1 & 1 & 1 & 2 \end{pmatrix}$$

Note: source code

`pyOptFEM.FEM3D.elemMatrix.ElemMassMat3DP1(V)`

Compute element Mass matrix, $\mathbb{M}^e(T)$ for a given tetrahedron T of volume $|T|$

Parameters $\mathbf{V}$ (*float*) – volume of the tetrahedron.

Returns 4×4 *numpy* array of floats.

5.2.2 Element Stiffness Matrix

The element Stiffness matrix, $\mathbb{S}^e(T)$, for the T is defined by

$$\mathbb{S}_{i,j}^e(T) = \int_T \langle \nabla \tilde{\varphi}_i(\mathbf{q}), \nabla \tilde{\varphi}_j(\mathbf{q}) \rangle d\mathbf{q}, \quad (i,j) \in \{1, 2, 3, 4\}^2$$

Note: sources code

`pyOptFEM.FEM3D.elemMatrix.ElemStiffMat3DP1 (ql, volume)`
 Compute element Stiffness matrix, $\mathbb{S}^e(T)$ for a given tetrahedron T

Parameters

- **ql** (2×4 *numpy* array) – the four vertices of the tetrahedron,
- **volume** (*float*) – volume of the tetrahedron.

Returns

Type 4×4 *numpy* array of floats.

5.2.3 Element Stiffness Elasticity Matrix

- The element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given tetrahedron T in the local *alternate* basis $\tilde{\mathcal{B}}_a$ is defined by

$$\mathbb{K}_{i,j}^e(T) = \int_T \boldsymbol{\epsilon}(\tilde{\boldsymbol{\psi}}_j)^t(\mathbf{q}) \mathbb{H} \boldsymbol{\epsilon}(\tilde{\boldsymbol{\psi}}_i)(\mathbf{q}) d\mathbf{q}, \quad \forall (i,j) \in \{1, \dots, 12\}^2.$$

We also have

$$\mathbb{K}^e(T) = \frac{1}{4|T|} \mathbb{B}^t \mathbb{H} \mathbb{B}$$

where $\mathbb{H}$ is the elasticity tensor and $\mathbb{B}$ is a 6×12 matrix defined by

$$\mathbb{B} = (\boldsymbol{\epsilon}(\tilde{\boldsymbol{\psi}}_1) \mid \boldsymbol{\epsilon}(\tilde{\boldsymbol{\psi}}_2) \mid \dots \mid \boldsymbol{\epsilon}(\tilde{\boldsymbol{\psi}}_{11}) \mid \boldsymbol{\epsilon}(\tilde{\boldsymbol{\psi}}_{12}))$$

So in $\tilde{\mathcal{B}}_a$ basis we obtain

$$\mathbb{B} = \begin{pmatrix} \frac{\partial \tilde{\varphi}_1}{\partial x} & 0 & 0 & & \frac{\partial \tilde{\varphi}_4}{\partial x} & 0 & 0 \\ 0 & \frac{\partial \tilde{\varphi}_1}{\partial y} & 0 & & 0 & \frac{\partial \tilde{\varphi}_4}{\partial y} & 0 \\ 0 & 0 & \frac{\partial \tilde{\varphi}_1}{\partial z} & & 0 & 0 & \frac{\partial \tilde{\varphi}_4}{\partial z} \\ \frac{\partial \tilde{\varphi}_1}{\partial y} & \frac{\partial \tilde{\varphi}_1}{\partial x} & 0 & \dots\dots\dots & \frac{\partial \tilde{\varphi}_4}{\partial y} & \frac{\partial \tilde{\varphi}_4}{\partial x} & 0 \\ 0 & \frac{\partial \tilde{\varphi}_1}{\partial z} & \frac{\partial \tilde{\varphi}_1}{\partial y} & & 0 & \frac{\partial \tilde{\varphi}_4}{\partial z} & \frac{\partial \tilde{\varphi}_4}{\partial y} \\ \frac{\partial \tilde{\varphi}_1}{\partial z} & 0 & \frac{\partial \tilde{\varphi}_1}{\partial x} & & \frac{\partial \tilde{\varphi}_4}{\partial z} & 0 & \frac{\partial \tilde{\varphi}_4}{\partial x} \end{pmatrix}$$

Note: sources code

`pyOptFEM.FEM3D.elemMatrix.ElemStiffElasMatBa3DP1 (ql, V, C)`

Return the element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given tetrahedron T in the local *alternate* basis $\mathcal{B}_a$

Parameters

- **ql** (4×2 *numpy* array) – contains the four vertices of the tetrahedron,
- **V** (*float*) – volume of the tetrahedron ,
- **H** (6×6 *numpy* array) – Elasticity tensor, $\mathbb{H}$.

Returns $\mathbb{K}^e(T)$ in $\mathcal{B}_a$ basis.

Type 12×12 *numpy* array of floats.

- The element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given triangle T in the local *block* basis $\tilde{\mathcal{B}}_b$ is defined by

$$\mathbb{K}_{i,j}^e(T) = \int_T \underline{\epsilon}(\tilde{\phi}_j)^t(\mathbf{q}) \mathbb{H} \underline{\epsilon}(\tilde{\phi}_i)(\mathbf{q}) d\mathbf{q}, \quad \forall (i, j) \in \{1, \dots, 6\}^2.$$

We also have

$$\mathbb{K}^e(T) = \frac{1}{4|T|} \mathbb{B}^t \mathbb{H} \mathbb{B}$$

where $\mathbb{H}$ is the elasticity tensor and $\mathbb{B}$ is a 6×12 matrix defined by

$$\mathbb{B} = \left(\underline{\epsilon}(\tilde{\phi}_1) \quad \underline{\epsilon}(\tilde{\phi}_2) \quad \dots \quad \underline{\epsilon}(\tilde{\phi}_{11}) \quad \underline{\epsilon}(\tilde{\phi}_{12}) \right)$$

So in $\tilde{\mathcal{B}}_b$ basis we obtain

$$\mathbb{B} = \begin{pmatrix} \frac{\partial \tilde{\varphi}_1}{\partial x} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial x} & 0 & \dots & 0 & 0 & \dots & 0 \\ 0 & \dots & 0 & \frac{\partial \tilde{\varphi}_1}{\partial y} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial y} & 0 & \dots & 0 \\ 0 & \dots & 0 & 0 & \dots & 0 & \frac{\partial \tilde{\varphi}_1}{\partial z} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial z} \\ \frac{\partial \tilde{\varphi}_1}{\partial y} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial y} & \frac{\partial \tilde{\varphi}_1}{\partial x} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial x} & 0 & \dots & 0 \\ 0 & \dots & 0 & \frac{\partial \tilde{\varphi}_1}{\partial z} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial z} & \frac{\partial \tilde{\varphi}_1}{\partial y} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial y} \\ \frac{\partial \tilde{\varphi}_1}{\partial z} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial z} & 0 & \dots & 0 & \frac{\partial \tilde{\varphi}_1}{\partial x} & \dots & \frac{\partial \tilde{\varphi}_4}{\partial x} \end{pmatrix}$$

Note: sources code

`pyOptFEM.FEM3D.elemMatrix.ElemStiffElasMatBb3DP1 (ql, V, C)`

Return the element Stiffness Elasticity matrix, $\mathbb{K}^e(T)$, for a given tetrahedron T in the local *block* basis $\mathcal{B}_b$

Parameters

- **ql** (4×2 *numpy* array) – contains the four vertices of the tetrahedron,
- **V** (*float*) – volume of the tetrahedron ,
- **H** (6×6 *numpy* array) – Elasticity tensor, $\mathbb{H}$.

Returns $\mathbb{K}^e(T)$ in $\mathcal{B}_b$ basis.

Type 12×12 *numpy* array of floats.

5.3 Vectorized tools (used by version OptV2)

5.3.1 Vectorized computation of basis functions gradients

By construction, the gradients of basis functions are constants on each element T_k . So, we denote, $\forall \alpha \in \{1, \dots, 4\}$, by $\mathbf{G}^\alpha$ the $3 \times n_{me}$ array defined, $\forall k \in \{1, \dots, n_{me}\}$, by

$$\mathbf{G}^\alpha(:, k) = \nabla \varphi_{me(\alpha, k)}(\mathbf{q}), \quad \forall \mathbf{q} \in T_k.$$

On T_k tetrahedra we set

$$\begin{aligned} D^{12} &= q^{me(1, k)} - q^{me(2, k)}, & D^{23} &= q^{me(2, k)} - q^{me(3, k)} \\ D^{13} &= q^{me(1, k)} - q^{me(3, k)}, & D^{24} &= q^{me(2, k)} - q^{me(4, k)} \\ D^{14} &= q^{me(1, k)} - q^{me(4, k)}, & D^{34} &= q^{me(3, k)} - q^{me(4, k)} \end{aligned}$$

Then, we have

$$\begin{aligned} \nabla \varphi_1^k(\mathbf{q}) &= \frac{1}{6|T_k|} \begin{pmatrix} -D_y^{23} D_z^{24} + D_z^{23} D_y^{24} \\ D_x^{23} D_z^{24} - D_z^{23} D_x^{24} \\ -D_x^{23} D_y^{24} + D_y^{23} D_x^{24} \\ -D_x^{12} D_z^{14} + D_z^{12} D_x^{14} \\ D_x^{12} D_y^{14} - D_y^{12} D_x^{14} \\ -D_x^{12} D_z^{14} + D_z^{12} D_x^{14} \end{pmatrix}, & \nabla \varphi_2^k(\mathbf{q}) &= \frac{1}{6|T_k|} \begin{pmatrix} D_y^{13} D_z^{14} - D_z^{13} D_y^{14} \\ -D_x^{13} D_z^{14} + D_z^{13} D_x^{14} \\ D_x^{13} D_y^{14} - D_y^{13} D_x^{14} \\ D_x^{12} D_z^{13} - D_z^{12} D_x^{13} \\ D_y^{12} D_z^{13} - D_z^{12} D_y^{13} \\ -D_x^{12} D_z^{13} + D_z^{12} D_x^{13} \end{pmatrix} \\ \nabla \varphi_3^k(\mathbf{q}) &= \frac{1}{6|T_k|} \begin{pmatrix} -D_y^{12} D_z^{14} + D_z^{12} D_y^{14} \\ D_x^{12} D_z^{14} - D_z^{12} D_x^{14} \\ -D_x^{12} D_y^{14} + D_y^{12} D_x^{14} \\ -D_x^{12} D_z^{14} + D_z^{12} D_x^{14} \\ D_x^{12} D_y^{14} - D_y^{12} D_x^{14} \\ -D_x^{12} D_z^{14} + D_z^{12} D_x^{14} \end{pmatrix}, & \nabla \varphi_4^k(\mathbf{q}) &= \frac{1}{6|T_k|} \begin{pmatrix} D_y^{12} D_z^{13} - D_z^{12} D_y^{13} \\ -D_x^{12} D_z^{13} + D_z^{12} D_x^{13} \\ D_x^{12} D_y^{13} - D_y^{12} D_x^{13} \\ D_x^{12} D_z^{13} - D_z^{12} D_x^{13} \\ D_y^{12} D_z^{13} - D_z^{12} D_y^{13} \\ -D_x^{12} D_z^{13} + D_z^{12} D_x^{13} \end{pmatrix} \end{aligned}$$

With these formulas, we obtain the vectorized algorithm given in Algorithm 5.4.

Algorithm 5.4

5.4 Vectorized elementary matrix (used by version OptV2)

5.4.1 Element Mass Matrix

We have

$$\mathbb{M}^e(T) = \frac{|T|}{20} \begin{pmatrix} 2 & 1 & 1 & 1 \\ 1 & 2 & 1 & 1 \\ 1 & 1 & 2 & 1 \\ 1 & 1 & 1 & 2 \end{pmatrix}$$

Then with $\mathbb{K}_g$ definition (see Section *New Optimized assembling algorithm (version OptV2)*), we obtain

$$\mathbb{K}_g(4(i-1) + j, k) = |T_k| \frac{1 + \delta_{i,j}}{20} \quad 1 \leq i, j \leq 4,$$

So the vectorized algorithm for $\mathbb{K}_g$ computation is simple and given in Algorithm 5.5.

Algorithm 5.5

Note:

Input :
 me : connectivity array ($4 \times n_{me}$)
 areas : array of mesh elements volumes ($1 \times n_{me}$)

Output :
 G^1, G^2, G^3, G^4 : gradients arrays ($3 \times n_{me}$)
 $G^\alpha(:, k) = \nabla \varphi_\alpha^k(q), \forall \alpha \in \{1, \dots, 4\}$

Function: $[G^1, G^2, G^3, G^4] \leftarrow \text{GRADIENTVEC3D}(q, \text{me}, \text{volumes})$

$D^{12} \leftarrow q(:, \text{me}(1, :)) - q(:, \text{me}(2, :))$ ▷ $3 \times n_{me}$ array
 $D^{13} \leftarrow q(:, \text{me}(1, :)) - q(:, \text{me}(3, :))$
 $D^{14} \leftarrow q(:, \text{me}(1, :)) - q(:, \text{me}(4, :))$
 $D^{23} \leftarrow q(:, \text{me}(2, :)) - q(:, \text{me}(3, :))$
 $D^{24} \leftarrow q(:, \text{me}(2, :)) - q(:, \text{me}(4, :))$
 $C \leftarrow 1/(6 * \text{volumes})$
 $G^1 \leftarrow \begin{pmatrix} (-D^{23}(2, :) * D^{24}(3, :) + D^{23}(3, :) * D^{24}(2, :)) * C \\ (D^{23}(1, :) * D^{24}(3, :) - D^{23}(3, :) * D^{24}(1, :)) * C \\ (-D^{23}(1, :) * D^{24}(2, :) + D^{23}(2, :) * D^{24}(1, :)) * C \end{pmatrix}$
 $G^2 \leftarrow \begin{pmatrix} (D^{13}(2, :) * D^{14}(3, :) - D^{13}(3, :) * D^{14}(2, :)) * C \\ (-D^{13}(1, :) * D^{14}(3, :) + D^{13}(3, :) * D^{14}(1, :)) * C \\ (D^{13}(1, :) * D^{14}(2, :) - D^{13}(2, :) * D^{14}(1, :)) * C \end{pmatrix}$
 $G^3 \leftarrow \begin{pmatrix} (-D^{12}(2, :) * D^{14}(3, :) + D^{12}(3, :) * D^{14}(2, :)) * C \\ (D^{12}(1, :) * D^{14}(3, :) - D^{12}(3, :) * D^{14}(1, :)) * C \\ (-D^{12}(1, :) * D^{14}(2, :) + D^{12}(2, :) * D^{14}(1, :)) * C \end{pmatrix}$
 $G^4 \leftarrow \begin{pmatrix} (D^{12}(2, :) * D^{13}(3, :) - D^{12}(3, :) * D^{13}(2, :)) * C \\ (-D^{12}(1, :) * D^{13}(3, :) + D^{12}(3, :) * D^{13}(1, :)) * C \\ (D^{12}(1, :) * D^{13}(2, :) - D^{12}(2, :) * D^{13}(1, :)) * C \end{pmatrix}$
end Function:

Figure 5.4: Vectorized algorithm for computation of basis functions gradients in 3d

Algorithm 1 $\mathbb{K}_g$ associated to Mass matrix in 3d

Function: $\mathbb{K}_g \leftarrow \text{ELEMMASSMAT3DP1VEC}(n_{me}, \text{volumes})$

$\mathbb{K}_g \leftarrow \mathbf{0}_{16 \times n_{me}}$ ▷ $16 \times n_{me}$ array of zeros
 $\mathbb{K}_g(1, :) \leftarrow \mathbb{K}_g(6, :) \leftarrow \mathbb{K}_g(11, :) \leftarrow \mathbb{K}_g(16, :) \leftarrow \text{volumes}/10$
 $\mathbb{K}_g(2, :) \leftarrow \mathbb{K}_g(3, :) \leftarrow \mathbb{K}_g(4, :) \leftarrow \mathbb{K}_g(5, :)$
 $\quad \leftarrow \mathbb{K}_g(7, :) \leftarrow \mathbb{K}_g(8, :) \leftarrow \mathbb{K}_g(9, :) \leftarrow \mathbb{K}_g(10, :)$
 $\quad \leftarrow \mathbb{K}_g(12, :) \leftarrow \mathbb{K}_g(13, :) \leftarrow \mathbb{K}_g(14, :) \leftarrow \mathbb{K}_g(15, :) \leftarrow \text{volumes}/20$
end Function:

Figure 5.5: Vectorized algorithm for $\mathbb{K}_g$ associated to 3d **Mass** matrix

```
pyOptFEM.FEM3D.elemMatrixVec.ElemMassMat3DP1Vec(nme, volumes)
```

Compute all the elementaries Mass matrices, $\mathbb{M}^e(T_k)$ for $k \in \{0, \dots, n_{me} - 1\}$

Parameters `volumes` (n_{me} *numpy* array of floats) – volumes of all the mesh elements.

Returns a one dimensional *numpy* array of size $16n_{me}$

5.4.2 Element Stiffness Matrix

We have $\forall(\alpha, \beta) \in \{1, \dots, 4\}^2$

$$\mathbb{S}_{\alpha, \beta}^e(T_k) = |T_k| \langle \nabla \varphi_{\beta}^k, \nabla \varphi_{\alpha}^k \rangle.$$

Using vectorized algorithm function `GRADIENTVEC3D` given in Algorithm 5.4, we obtain the vectorized algorithm 5.6 for $\mathbb{K}_g$ computation of the **Stiffness** matrix in 3d.

Algorithm 5.6

```
1: Function:  $\mathbb{K}_g \leftarrow \text{ELEMSTIFFMAT3DP1VEC}(n_{me}, q, me, volumes)$ 
2:  $[G^1, G^2, G^3, G^4] \leftarrow \text{GRADIENTVEC3D}(q, me, volumes)$ 
3:  $\mathbb{K}_g \leftarrow \mathbf{O}_{16 \times n_{me}}$  ▷  $16 \times n_{me}$  array of zeros
4:  $\mathbb{K}_g(1, :) \leftarrow volumes \cdot \text{SUM}(G^1 \cdot G^1, 1)$ 
5:  $\mathbb{K}_g(2, :) \leftarrow \mathbb{K}_g(5, :) \leftarrow volumes \cdot \text{SUM}(G^1 \cdot G^2, 1)$ 
6:  $\mathbb{K}_g(3, :) \leftarrow \mathbb{K}_g(9, :) \leftarrow volumes \cdot \text{SUM}(G^1 \cdot G^3, 1)$ 
7:  $\mathbb{K}_g(4, :) \leftarrow \mathbb{K}_g(13, :) \leftarrow volumes \cdot \text{SUM}(G^1 \cdot G^4, 1)$ 
8:  $\mathbb{K}_g(6, :) \leftarrow volumes \cdot \text{SUM}(G^2 \cdot G^2, 1)$ 
9:  $\mathbb{K}_g(7, :) \leftarrow \mathbb{K}_g(10, :) \leftarrow volumes \cdot \text{SUM}(G^2 \cdot G^3, 1)$ 
10:  $\mathbb{K}_g(8, :) \leftarrow \mathbb{K}_g(14, :) \leftarrow volumes \cdot \text{SUM}(G^2 \cdot G^4, 1)$ 
11:  $\mathbb{K}_g(11, :) \leftarrow volumes \cdot \text{SUM}(G^3 \cdot G^3, 1)$ 
12:  $\mathbb{K}_g(12, :) \leftarrow \mathbb{K}_g(15, :) \leftarrow volumes \cdot \text{SUM}(G^3 \cdot G^4, 1)$ 
13:  $\mathbb{K}_g(16, :) \leftarrow volumes \cdot \text{SUM}(G^4 \cdot G^4, 1)$ 
14: end Function:
```

Figure 5.6: Vectorized algorithm for $\mathbb{K}_g$ associated to 3d **Stiffness** matrix

Note:

```
pyOptFEM.FEM3D.elemMatrixVec.ElemStiffMat3DP1Vec(nme, q, me, volumes)
```

Compute all the elementaries Stiff matrices, $\mathbb{S}^e(T_k)$ for $k \in \{0, \dots, n_{me} - 1\}$

Parameters

- `nme` (*int*) – number of mesh elements,
- `q` ($3 \times n_q$ *numpy* array of floats) – mesh vertices,
- `me` ($4 \times n_{me}$ *numpy* array of integers) – mesh connectivity,
- `areas` (n_{me} *numpy* array of floats) – areas of all the mesh elements.

Returns a one dimensional *numpy* array of size $9n_{me}$

5.4.3 Element Stiffness Elasticity Matrix

- We define on tetrahedra T_k the local *alternate* basis $\mathcal{B}_a^k$ by

$$\begin{aligned} \mathcal{B}_a^k &= \{\boldsymbol{\psi}_1^k, \dots, \boldsymbol{\psi}_{12}^k\} \\ &= \left\{ \begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_1^k \end{pmatrix}, \begin{pmatrix} \varphi_2^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_2^k \end{pmatrix}, \begin{pmatrix} \varphi_3^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_3^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_3^k \end{pmatrix}, \begin{pmatrix} \varphi_4^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_4^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_4^k \end{pmatrix} \right\} \end{aligned}$$

where $\varphi_\alpha^k = \varphi_{\text{me}(\alpha, k)}$. With notations of [Presentation](#), we have $\forall(\alpha, \beta) \in \{1, \dots, 12\}^2$

$$\mathbb{K}_{\alpha, \beta}^e(T_k) = \int_{T_k} \boldsymbol{\epsilon}^t(\boldsymbol{\psi}_\beta^k) \mathbb{C} \boldsymbol{\epsilon}(\boldsymbol{\psi}_\alpha^k) d\mathbf{q} = \int_{T_k} \mathcal{H}(\boldsymbol{\psi}_\beta^k, \boldsymbol{\psi}_\alpha^k)(\mathbf{q}) d\mathbf{q}$$

with, $\forall \mathbf{u} = (u_1, u_2, u_3) \in H^1(\Omega)^3$, $\forall \mathbf{v} = (v_1, v_2, v_3) \in H^1(\Omega)^3$, by

$$\begin{aligned} \mathcal{H}(\mathbf{u}, \mathbf{v}) &= \\ &= \left\langle \begin{pmatrix} \gamma & 0 & 0 \\ 0 & \mu & 0 \\ 0 & 0 & \mu \end{pmatrix} \nabla u_1, \nabla v_1 \right\rangle + \left\langle \begin{pmatrix} 0 & \lambda & 0 \\ \mu & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \nabla u_2, \nabla v_1 \right\rangle + \left\langle \begin{pmatrix} 0 & 0 & \lambda \\ \mu & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \nabla u_3, \nabla v_1 \right\rangle \\ &+ \left\langle \begin{pmatrix} 0 & \mu & 0 \\ \lambda & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \nabla u_1, \nabla v_2 \right\rangle + \left\langle \begin{pmatrix} \mu & 0 & 0 \\ 0 & \gamma & 0 \\ 0 & 0 & \mu \end{pmatrix} \nabla u_2, \nabla v_2 \right\rangle + \left\langle \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & \lambda \\ 0 & \mu & 0 \end{pmatrix} \nabla u_3, \nabla v_2 \right\rangle \\ &+ \left\langle \begin{pmatrix} 0 & 0 & 0 \\ 0 & 0 & \mu \\ \lambda & 0 & 0 \end{pmatrix} \nabla u_1, \nabla v_3 \right\rangle + \left\langle \begin{pmatrix} 0 & 0 & \mu \\ 0 & 0 & \lambda \\ 0 & \mu & 0 \end{pmatrix} \nabla u_2, \nabla v_3 \right\rangle + \left\langle \begin{pmatrix} 0 & \mu & 0 \\ 0 & 0 & \gamma \\ 0 & 0 & \mu \end{pmatrix} \nabla u_3, \nabla v_3 \right\rangle \end{aligned}$$

where λ and μ are the Lamé coefficients, and $\gamma = \lambda + 2\mu$.

For example, we can compute explicitly the first two terms in the first column of $\mathbb{K}^e(T_k)$ which are given by

$$\begin{aligned} \mathbb{K}_{1,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\boldsymbol{\psi}_1^k, \boldsymbol{\psi}_1^k)(\mathbf{q}) d\mathbf{q} \\ &= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix} \right) (\mathbf{q}) d\mathbf{q} \\ &= |T_k| \left\langle \begin{pmatrix} \gamma & 0 & 0 \\ 0 & \mu & 0 \\ 0 & 0 & \mu \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_1^k \right\rangle = |T_k| \left(\gamma \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_1^k}{\partial x} + \mu \left(\frac{\partial \varphi_1^k}{\partial y} \frac{\partial \varphi_1^k}{\partial y} + \frac{\partial \varphi_1^k}{\partial z} \frac{\partial \varphi_1^k}{\partial z} \right) \right). \end{aligned}$$

and

$$\begin{aligned} \mathbb{K}_{2,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\boldsymbol{\psi}_1^k, \boldsymbol{\psi}_2^k)(\mathbf{q}) d\mathbf{q} \\ &= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1^k \\ 0 \end{pmatrix} \right) (\mathbf{q}) d\mathbf{q} \\ &= |T_k| \left\langle \begin{pmatrix} 0 & \mu & 0 \\ \lambda & 0 & 0 \\ 0 & 0 & 0 \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_1^k \right\rangle = |T_k| (\lambda + \mu) \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_1^k}{\partial y}. \end{aligned}$$

Using vectorized algorithm function `GRADIENTVEC3D` given in [Algorithm 5.4](#), we obtain the vectorized algorithm [5.7](#) for $\mathbb{K}_g$ computation of the **Elasticity Stiffness** matrix in 3d.

Algorithm 5.7

Note:

`pyOptFEM.FEM3D.elemMatrixVec.ElemStiffElasMatBa3DP1Vec` (*nme*, *q*, *me*, *volumes*, *la*, *mu*)

Compute all the elementaries Stiffness elasticity matrices, $\mathbb{K}^e(T_k)$ for $k \in \{0, \dots, n_{\text{me}} - 1\}$ in local *alternate* basis.

```

1: Function:  $\mathbb{K}_g \leftarrow \text{ELEMSTIFFELASMatBAVec3DP1}(n_{\text{me}}, q, \text{me}, \text{volumes}, \lambda, \mu)$ 
2:    $[G^1, G^2, G^3, G^4] \leftarrow \text{GRADIENTVec3D}(q, \text{me}, \text{volumes})$ 
3:    $\mathbb{K}_g \leftarrow \mathbb{O}_{144 \times n_{\text{me}}}$ 
4:    $\mathbb{K}_g(1, :) \leftarrow ((\lambda + 2\mu) * G^1(1, :).^2 + \mu * (G^1(2, :).^2 + G^1(3, :).^2)) * \text{volumes}$ 
5:    $\mathbb{K}_g(2, :) \leftarrow \mathbb{K}_g(13, :) \leftarrow (\lambda + \mu) * G^1(1, :) * G^1(2, :) * \text{volumes}$ 
6:    $\vdots$ 
7:    $\mathbb{K}_g(132, :) \leftarrow \mathbb{K}_g(143, :) \leftarrow (\lambda + \mu) * G^4(2, :) * G^4(3, :) * \text{volumes}$ 
8:    $\mathbb{K}_g(144, :) \leftarrow ((\lambda + 2\mu) * G^4(3, :).^2 + \mu * (G^4(1, :).^2 + G^4(2, :).^2)) * \text{volumes}$ 
9: end Function:

```

Figure 5.7: Vectorized algorithm for $\mathbb{K}_g$ associated to 3d Elasticity Stiffness matrix

Parameters

- **nme** (*int*) – number of mesh elements,
- **q** ((3, nq) *numpy* array of floats) – mesh vertices,
- **me** ((4, nme) *numpy* array of integers) – mesh connectivity,
- **volumes** ((nme,) *numpy* array of floats) – volumes of all the mesh elements.
- **la** (*float*) – the
 lambda Lamé parameter,
- **mu** (*float*) – the
 mu Lamé parameter.

Returns a (144*nme,) *numpy* array of floats.

- We define on T_k the local *block* basis $\mathcal{B}_b^k$ by

$$\begin{aligned}
 \mathcal{B}_b^k &= \{\phi_1^k, \dots, \phi_{12}^k\} \\
 &= \\
 &\left\{ \begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_2^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_3^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_4^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_1^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_2^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_3^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ \varphi_4^k \\ 0 \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_1^k \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_2^k \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_3^k \end{pmatrix}, \begin{pmatrix} 0 \\ 0 \\ \varphi_4^k \end{pmatrix} \right\}
 \end{aligned}$$

where $\varphi_\alpha^k = \varphi_{\text{me}(\alpha, k)}$.

For example, using formula (??), we can explicitly compute the first two terms in the first column of $\mathbb{K}^e(T_k)$ which are given by

$$\begin{aligned}
 \mathbb{K}_{1,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\phi_1^k, \phi_1^k)(q) dq \\
 &= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix} \right) (q) dq \\
 &= |T_k| \left\langle \begin{pmatrix} \gamma & 0 & 0 \\ 0 & \mu & 0 \\ 0 & 0 & \mu \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_1^k \right\rangle = |T_k| \left(\gamma \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_1^k}{\partial x} + \mu \left(\frac{\partial \varphi_1^k}{\partial y} \frac{\partial \varphi_1^k}{\partial y} + \frac{\partial \varphi_1^k}{\partial z} \frac{\partial \varphi_1^k}{\partial z} \right) \right).
 \end{aligned}$$

and

$$\begin{aligned}
 \mathbb{K}_{2,1}^e(T_k) &= \int_{T_k} \mathcal{H}(\phi_1^k, \phi_2^k)(q) dq \\
 &= \int_{T_k} \mathcal{H} \left(\begin{pmatrix} \varphi_1^k \\ 0 \\ 0 \end{pmatrix}, \begin{pmatrix} \varphi_2^k \\ 0 \\ 0 \end{pmatrix} \right) (q) dq \\
 &= |T_k| \left\langle \begin{pmatrix} \gamma & 0 & 0 \\ 0 & \mu & 0 \\ 0 & 0 & \mu \end{pmatrix} \nabla \varphi_1^k, \nabla \varphi_2^k \right\rangle = |T_k| \left(\gamma \frac{\partial \varphi_1^k}{\partial x} \frac{\partial \varphi_2^k}{\partial x} + \mu \left(\frac{\partial \varphi_1^k}{\partial y} \frac{\partial \varphi_2^k}{\partial y} + \frac{\partial \varphi_1^k}{\partial z} \frac{\partial \varphi_2^k}{\partial z} \right) \right).
 \end{aligned}$$

Using vectorized algorithm function `GRADIENTVEC3D` given in Algorithm 5.4, we obtain the vectorized algorithm 5.8 for $\mathbb{K}_g$ computation of the **Elasticity Stiffness** matrix in 3d.

Algorithm 5.8

```

1: Function:  $\mathbb{K}_g \leftarrow \text{ELEMSTIFFELASMATBBVEC3DP1}(n_{me}, q, me, volumes, \lambda, \mu)$ 
2:  $[G^1, G^2, G^3, G^4] \leftarrow \text{GRADIENTVEC3D}(q, me, volumes)$ 
3:  $\mathbb{K}_g \leftarrow \mathbb{O}_{144 \times n_{me}}$ 
4:  $\mathbb{K}_g(1, :) \leftarrow ((\lambda + 2\mu) * G^1(1, :).^2 + \mu * (G^1(2, :).^2 + G^1(3, :).^2)) * volumes$ 
5:  $\mathbb{K}_g(2, :) \leftarrow \mathbb{K}_g(13, :) \leftarrow ((\lambda + 2\mu) * G^1(1, :). * G^2(1, :) +$ 
    $\mu(G^1(2, :). * G^2(2, :)) + G^1(3, :). * G^2(3, :))) * volumes$ 
6:  $\vdots$ 
7:  $\mathbb{K}_g(132, :) \leftarrow \mathbb{K}_g(13, :) \leftarrow ((\lambda + 2\mu) * G^3(1, :). * G^4(1, :) +$ 
    $\mu(G^3(2, :). * G^4(2, :)) + G^3(3, :). * G^4(3, :))) * volumes$ 
8:  $\mathbb{K}_g(144, :) \leftarrow ((\lambda + 2\mu) * G^4(3, :).^2 + \mu * (G^4(1, :).^2 + G^4(2, :).^2)) * volumes$ 
9: end Function:

```

Figure 5.8: Vectorized algorithm for $\mathbb{K}_g$ associated to 3d **Elasticity Stiffness** matrix

Note:

`pyOptFEM.FEM3D.elemMatrixVec.ElemStiffElasMatBb3DP1Vec` (*nme*, *q*, *me*, *volumes*, *L*, *M*)

Compute all the elementaries Stiffness elasticity matrices, $\mathbb{K}^e(T_k)$ for $k \in \{0, \dots, n_{me} - 1\}$ in local *block* basis.

Parameters

- **nme** (*int*) – number of mesh elements,
- **q** (*(3, nq)* *numpy* array of floats) – mesh vertices,
- **me** (*(4, nme)* *numpy* array of integers) – mesh connectivity,
- **volumes** (*(nme,)* *numpy* array of floats) – volumes of all the mesh elements.
- **la** (*float*) – the *lambda* Lamé parameter,
- **mu** (*float*) – the *mu* Lamé parameter.

Returns a *(144 * nme,)* *numpy* array of floats.

5.5 Mesh

`class pyOptFEM.FEM3D.mesh.CubeMesh` (*N*, ***kwargs*)

Build meshes of the unit cube $[0, 1]^3$. Class attributes are :

- **nq**, total number of mesh vertices (points), also denoted n_q .
- **nme**, total number of mesh elements (tetrahedra in 3d),

- version**, mesh structure version,
- q**, *Numpy* array of vertices coordinates, dimension $(nq, 3)$ (*version 0*) or $(3, nq)$ (*version 1*).
 $q[j]$ (*version 0*) or $q[:, j]$ (*version 1*) are the three coordinates of the j -th vertex, $j \in \{0, \dots, nq - 1\}$
- me**, *Numpy* connectivity array, dimension $(nme, 4)$ (*version 0*) or $(4, nme)$ (*version 1*).
 $me[k]$ (*version 0*) or $me[:, k]$ (*version 1*) are the storage index of the four vertices of the k -th tetrahedron in the array q of vertices coordinates, $k \in \{0, \dots, nme - 1\}$.
- volumes**, Array of mesh elements volumes, $(nme,)$ *Numpy* array.
 $volumes[k]$ is the volume of k -th tetrahedron, k in $range(0, nme)$

Parameters N – points number on each edges of the cube

optional parameter : `version=0` or `version=1`

class `pyOptFEM.FEM3D.mesh.getMesh(filename, **kwargs)`

Read a *medit* mesh from file `meshfile`. Class attributes are :

- nq**, total number of mesh vertices (points), also denoted nq .
- nme**, total number of mesh elements (tetrahedra in 3d),
- version**, mesh structure version,
- q**, *Numpy* array of vertices coordinates, dimension $(nq, 3)$ (*version 0*) or $(3, nq)$ (*version 1*).
 $q[j]$ (*version 0*) or $q[:, j]$ (*version 1*) are the three coordinates of the j -th vertex, $j \in \{0, \dots, nq - 1\}$
- me**, *Numpy* connectivity array, dimension $(nme, 4)$ (*version 0*) or $(4, nme)$ (*version 1*).
 $me[k]$ (*version 0*) or $me[:, k]$ (*version 1*) are the storage index of the four vertices of the k -th tetrahedron in the array q of vertices coordinates, $k \in \{0, \dots, nme - 1\}$.
- volumes**, Array of mesh elements volumes, $(nme,)$ *Numpy* array.
 $volumes[k]$ is the volume of k -th tetrahedron, k in $range(0, nme)$

Parameters `meshfile` – *medit* mesh file

optional parameter : `version=0` or `version=1`

VALID2D MODULE

Contents

- Mass Matrix
- Stiffness matrix
- Stiffness Elasticity Matrix

6.1 Mass Matrix

Validation program for the assembly of the **Mass** matrix, $\mathbb{M}$, for P_1 -Lagrange finite element method in 2d (see [Mass Matrix](#)).

- *Test 1*: Computation of the **Mass** Matrix using the versions `base`, `OptV1` and `OptV2` : give errors and computation times
- *Test 2*: Computation of the integral

$$\int_{\Omega_h} u(x, y) v(x, y) dx dy \approx \mathbf{V}^t \mathbb{M} \mathbf{U}$$

where $U_i = u(q^i)$ and $V_i = v(q^i)$. Functions u and v are those defined in ...

- *Test 3*: Ones retrieves the order 2 of P_1 -Lagrange integration

$$\left| \int_{\Omega_h} u v - \Pi_h(u) \Pi_h(v) d\Omega \right| \leq Ch^2$$

Note: sources code

```
pyOptFEM.valid2D.validMass2DP1.validMass2DP1()  
Validation of Mass Matrix for P1-Lagrange finite elements in 2D
```

```
>>> from pyOptFEM.valid2D import validMass2DP1  
>>> validMass2DP1()  
*****  
*      Mass Assembling P1 validations      *  
*****  
-----
```

Test 1: Matrices errors and CPU times

```
-----  
Matrix size           : (121,121)  
Error Plbase vs OptV1 : 8.673617e-19  
Error Plbase vs OptV2 : 8.673617e-19  
CPU times base (ref)  : 0.2638 (s)  
CPU times OptV1       : 0.0259 (s) - Speed Up X10.179  
CPU times OptV2       : 0.0016 (s) - Speed Up X160.286  
-----
```

Test 1 (results): OK

Test 2: Validations by integration on [0,1]x[0,1]

```
-----  
function 0 : u(x,y)=x+2*y, v(x,y)=3*x+y+1,  
            -> Mass error=0.000000e+00  
function 1 : u(x,y)=x**2+2*y*x+y, v(x,y)=3*x*y+y**2+1,  
            -> Mass error=5.736389e-03  
function 2 : u(x,y)=x**3+2*y**2*x+y**2+x, v(x,y)=2*x*y+y**3+x*y,  
            -> Mass error=1.141472e-02  
-----
```

Test 2 (results): OK

Test 3: Validations by order

```
-----  
functions 2: u(x,y)=x**3+2*y**2*x+y**2+x, v(x,y)=2*x*y+y**3+x*y  
Matrix size           : (121,121)  
MassAssemblingP1OptV2 CPU times : 0.001(s)  
Error                 : 1.141472e-02  
Matrix size           : (441,441)  
MassAssemblingP1OptV2 CPU times : 0.002(s)  
Error                 : 2.825605e-03  
...  
Matrix size           : (10201,10201)  
MassAssemblingP1OptV2 CPU times : 0.019(s)  
Error                 : 1.125457e-04  
-----
```

At last, this program plots the figure :

6.2 Stiffness matrix

Validation function for the assembly of the **Stiffness** matrix, $\mathbb{S}$, for P_1 -Lagrange finite element method in 2d (see [Stiffness Matrix](#))

- *Test 1*: Computation of the **Stiffness** Matrix using the versions base, OptV1 and OptV2 : give errors and computation times
- *Test 2*: Computation of the integral

$$\int_{\Omega_h} \nabla u(q) \cdot \nabla v(q) dq \approx \mathbf{V}^t \mathbb{S} \mathbf{U}$$

where $\mathbf{U}_i = u(q^i)$ and $\mathbf{V}_i = v(q^i)$. Functions u and v are those defined in ...

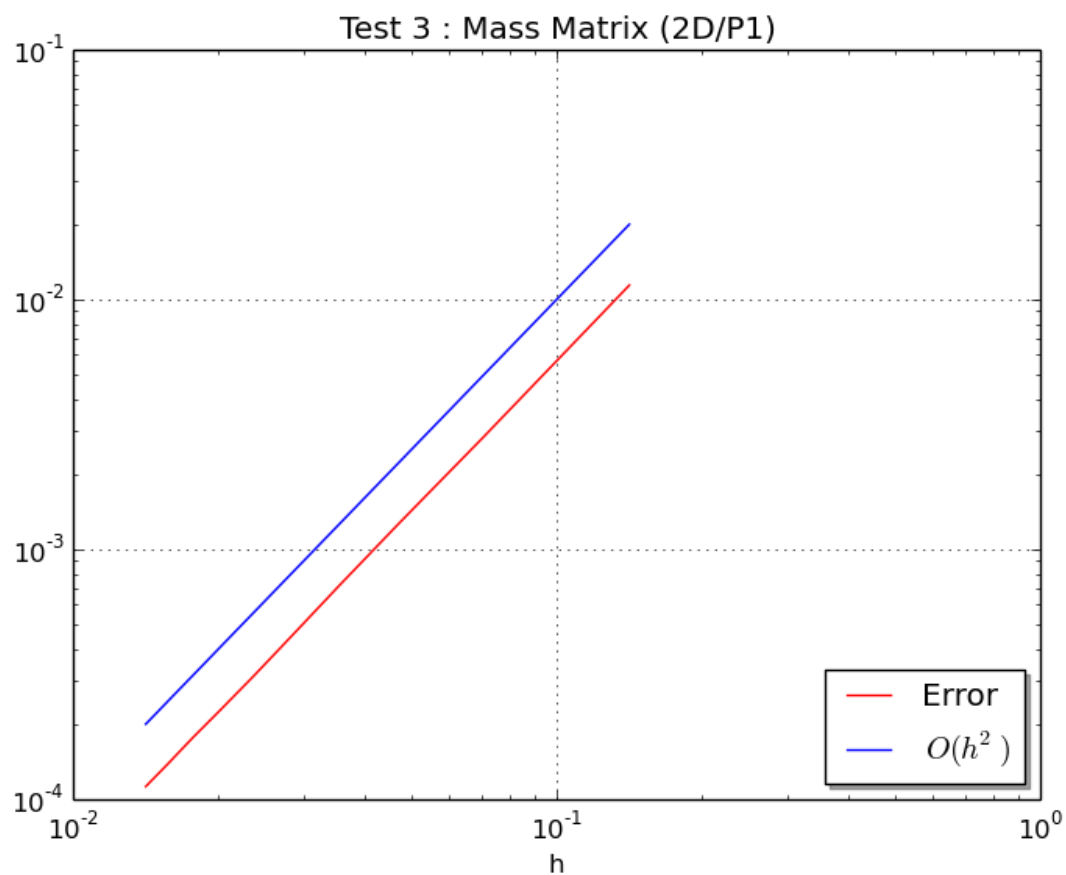


Figure 6.1: Graphical results of validMass2DP1-Test 3

- *Test 3*: Ones retrieves the order 2 of P_1 -Lagrange integration

$$|\int_{\Omega_h} \nabla u \cdot \nabla v - \nabla \Pi_h(u) \cdot \nabla \Pi_h(v) d\Omega| \leq Ch^2$$

Note: sources code

pyOptFEM.valid2D.validStiff2DP1.**validStiff2DP1**()
validation of stiffness matrix assembling functions

```
>>> from pyOptFEM.valid2D import validStiff2DP1
>>> validStiff2DP1()
*****
*      2D Stiff Assembling P1 validations      *
*****
-----
Test 1: Matrices errors and CPU times
-----
Matrix size           : (121,121)
Error Plbase vs OptV1 : 8.881784e-16
Error Plbase vs OptV2 : 4.440892e-16
CPU times base (ref)  : 0.1519 (s)
CPU times OptV1       : 0.0106 (s) - Speed Up X14.270
CPU times OptV2       : 0.0009 (s) - Speed Up X174.238
-----
Test 1 (results): OK
-----
-----
Test 2: Validations by integration on [0,1]x[0,1]
-----
function 0 : u(x,y)=x+2*y, v(x,y)=3*x+y+1,
-> Stiff error=2.486900e-14
function 1 : u(x,y)=x**2+2*y*x+y, v(x,y)=3*x*y+y**2+1,
-> Stiff error=2.000000e-02
function 2 : u(x,y)=x**3+2*y**2*x+y**2+x, v(x,y)=2*x*y+y**3+x*y,
-> Stiff error=1.500000e-02
-----
Test 2 (results): OK
-----
-----
Test 3: Validations by order
-----
Test 2: u(x,y)=x**3+2*y**2*x+y**2+x, v(x,y)=2*x*y+y**3+x*y
Matrix size           : (121,121)
StiffAssemblingP1OptV2 CPU times : 0.001(s)
Error                 : 1.500000e-02
...
Matrix size           : (10201,10201)
StiffAssemblingP1OptV2 CPU times : 0.021(s)
Error                 : 1.500000e-04
```

At last, this program plot this figure :

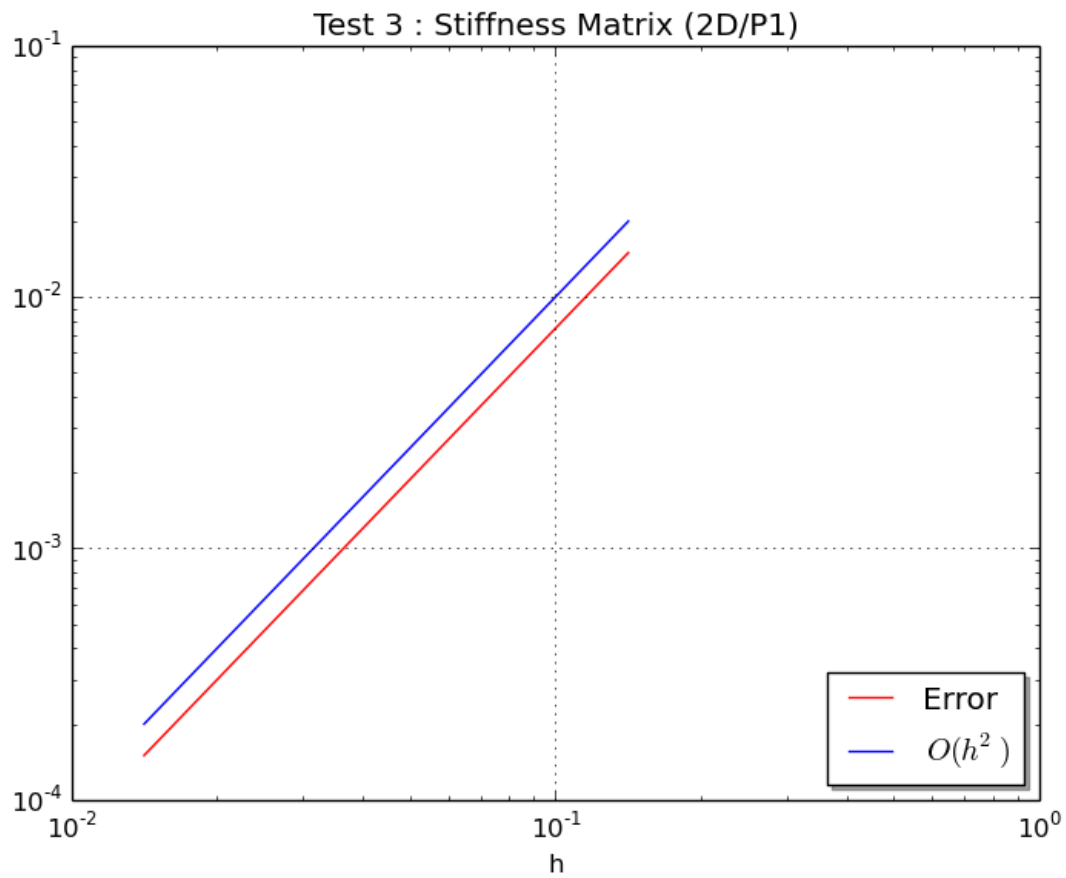


Figure 6.2: Graphical results of validStiff2DP1-Test 3

6.3 Stiffness Elasticity Matrix

Validation function for the assembly of the **Stiffness Elasticity** matrix, $\mathbb{K}$, for P_1 -Lagrange finite element method in 2d (see [Stiffness Elasticity Matrix](#))

- *Test 1:* Computation of the **Stiffness Elasticity** Matrix using the versions `base`, `OptV1` and `OptV2` : give errors and computation times
- *Test 2:* Computation of the integral

$$\int_{\Omega_h} \underline{\epsilon}^t(u) \underline{\sigma}(v) dq \approx \mathbf{V}^t \mathbb{K} \mathbf{U}$$

where $\mathbf{u} = (u_1, u_2)$ and $\mathbf{v} = (v_1, v_2)$ are given 2d-vector functions and $\mathbf{U}$ and $\mathbf{V}$ are the vectors in $\mathbb{R}^{2n_q}$ defined by

- if `Num=0` or `Num=2` (i.e. in global *alternate* basis $\mathcal{B}_a$, see [Assembly matrices \(versions base, OptV1 and OptV2\)](#))

$$\forall i \in \{1, \dots, n_q\}, U_{2i-1} = u_1(q^i), U_{2i} = u_2(q^i), \text{ and } V_{2i-1} = v_1(q^i), V_{2i} = v_2(q^i)$$

- if `Num=1` or `Num=3` (i.e. in global *block* basis $\mathcal{B}_b$, see [Assembly matrices \(versions base, OptV1 and OptV2\)](#))

$$\forall i \in \{1, \dots, n_q\}, U_i = u_1(q^i), U_{i+n_q} = u_2(q^i), \text{ and } V_i = v_1(q^i), V_{i+n_q} = v_2(q^i)$$

- *Test 3:* Ones retrieves the order 2 of P_1 -Lagrange integration

$$\left| \int_{\Omega_h} \underline{\epsilon}^t(u) \underline{\sigma}(v) - \underline{\epsilon}^t(\Pi_h(u)) \underline{\sigma}(\Pi_h(v)) d\Omega \right| \leq Ch^2$$

Note:

```
pyOptFEM.valid2D.validStiff2DP1.validStiffElas2DP1 ([Num=0, la=1.5, mu=0.5])
```

Parameters

- **Num** – (*optional*) Numbering choice.
- **la** – (*optional*) the first Lamé coefficient in Hooke's law, denoted by λ .
- **mu** – (*optional*) the second Lamé coefficient in Hooke's law, denoted by μ .

```
pyOptFEM.valid2D.validStiffElas2DP1.validStiffElas2DP1 (**kwargs)  
validation of stiffness elasticity matrix assembling functions
```

```
>>> from pyOptFEM.valid2D import validStiffElas2DP1  
>>> validStiffElas2DP1()  
*****  
*      2D StiffElas Assembling P1 validations      *  
*****
```

Numbering Choice : global alternate numbering with local alternate numbering

Test 1: Matrices errors and CPU times

```
Matrix size           : (1922,1922)
Error Plbase vs OptV1 : 1.776357e-15
Error Plbase vs OptV2 : 2.664535e-15
CPU times base (ref)  : 1.9251 (s)
CPU times OptV1       : 0.2817 (s) - Speed Up X6.835
CPU times OptV2       : 0.0098 (s) - Speed Up X195.725
```

Test 1 (results): OK

Test 2: Validations by integration on [0,1]x[0,1]

```
function 0 :
  u(x,y)=[x - 2*y,x + y],
  v(x,y)=[x + 2*y,2*x - y],
  -> StiffElas error=8.704149e-14
function 1 :
  u(x,y)=[x**2+2*y*x+y,-2*y**2+x**2+x-y],
  v(x,y)=[3*x*y+y**2+1,3*x**2-x*y+1],
  -> StiffElas error=3.916049e-03
function 2 :
  u(x,y)=[x**3+2*y**2*x+y**2+x,y**3-2*x**2*y],
  v(x,y)=[2*x*y+y**3+x*y,3*x**3-2*x*y+x-1],
  -> StiffElas error=6.574856e-03
```

Test 2 (results): OK

Test 3: Validations by order

```
functions 2:
  u(x,y)=[ 'x**3+2*y**2*x+y**2+x', 'y**3-2*x**2*y'],
  v(x,y)=[ '2*x*y+y**3+x*y', '3*x**3-2*x*y+x-1'],
  lambda=1.500000, mu=0.500000
  Matrix size           : (242,242)
  StiffElasAssemblingP1OptV2 CPU times : 0.002(s)
  Error                 : 5.767667e-02
  Matrix size           : (882,882)
  StiffElasAssemblingP1OptV2 CPU times : 0.005(s)
  Error                 : 1.447542e-02
  Matrix size           : (1922,1922)
  ...
  Matrix size           : (20402,20402)
  StiffElasAssemblingP1OptV2 CPU times : 0.110(s)
  Error                 : 5.797263e-04
```

At last, this program plot this figure :

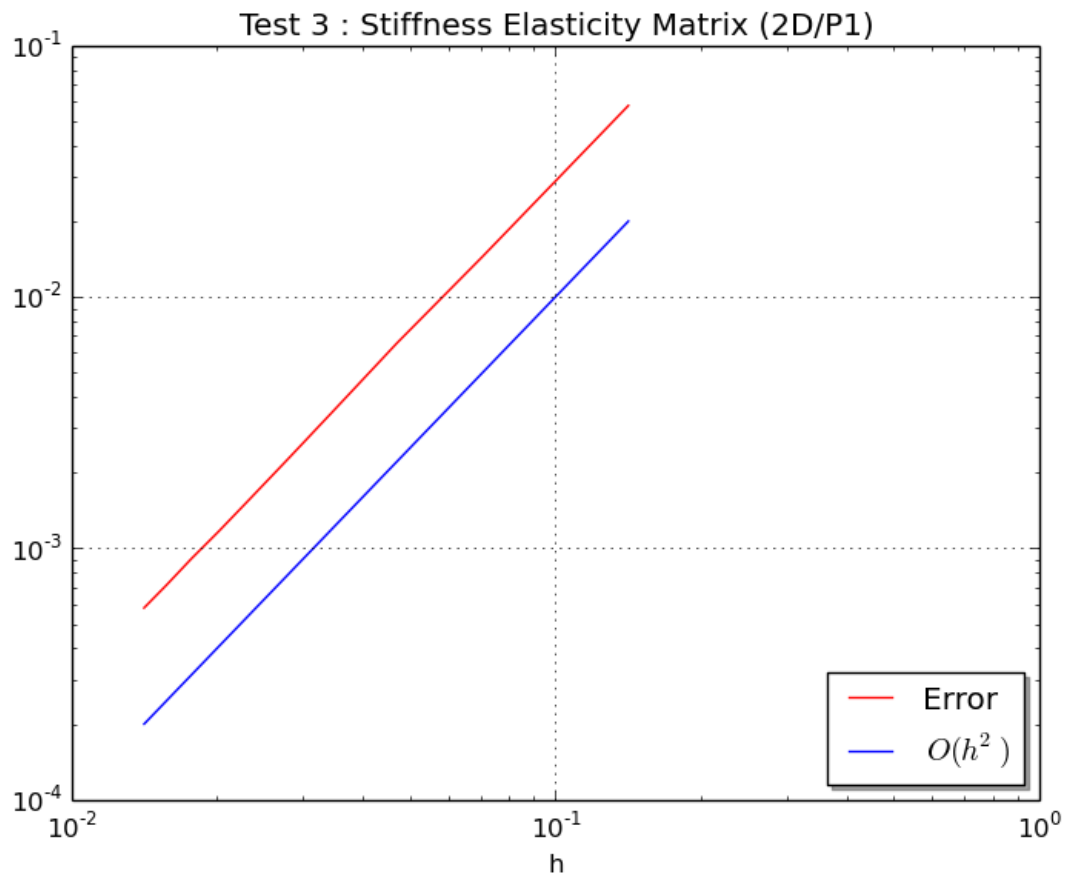


Figure 6.3: Graphical results of validStiffElas2DP1-Test 3

VALID3D MODULE

Contents

- [Mass Matrix](#)
- [Stiffness matrix](#)
- [Stiffness Elasticity Matrix](#)

7.1 Mass Matrix

Validation program for the assembly of the **Mass** matrix for P_1 -Lagrange finite element method in 3d (see [Mass Matrix](#)). Meshes of the unit cube are used.

- Test 1: Computation of the **Mass** Matrix using the versions `base`, `OptV1` and `OptV2` : give errors and computation times
- Test 2: Computation of the integral

$$\int_{\Omega_h} u(q)v(q)dq \approx \mathbf{V}^t \mathbf{M} \mathbf{U}$$

where $U_i = u(q^i)$ and $V_i = v(q^i)$. Functions u and v are those defined in ...

- Test 3: Ones retrieves the order 2 of P_1 -Lagrange integration

$$|\int_{\Omega_h} u v - \Pi_h(u) \Pi_h(v) d\Omega| \leq Ch^2$$

Note: sources code

```
>>> from pyOptFEM.valid3D import validMass3DP1
>>> validMass3DP1()
*****
*      3D Mass Assembling P1 validations      *
*****
-----
Test 1: Matrices errors and CPU times
-----
Matrix size           : (216,216)
```

```
Error Plbase vs OptV1 : 1.734723e-18
Error Plbase vs OptV2 : 1.734723e-18
CPU times base (ref)   : 0.9355 (s)
CPU times OptV1        : 0.0481 (s) - Speed Up X19.438
CPU times OptV2        : 0.0016 (s) - Speed Up X592.083
```

```
-----
Test 1 (results): OK
-----
```

```
-----
Test 2: Validations by integration on [0,1]x[0,1]
-----
```

```
function 0 :
  u(x,y,z)=x + y + z,
  v(x,y,z)=x - y - z,
  -> Stiff error=3.330669e-16
function 1 :
  u(x,y,z)=3*x + 2*y - z - 1,
  v(x,y,z)=2*x - 2*y + 2*z + 1,
  -> Stiff error=8.881784e-16
function 2 :
  u(x,y,z)=3*x**2 - x*y + 2*y**2 + y*z - z**2 - 3,
  v(x,y,z)=2*x**2 + x*y - 3*y**2 - x*z - y,
  -> Stiff error=1.173244e-02
```

```
-----
Test 2 (results): OK
-----
```

```
-----
Test 3: Validations by order
-----
```

```
function 2 :
  u(x,y,z)=3*x**2 - x*y + 2*y**2 + y*z - z**2 - 3,
  v(x,y,z)=2*x**2 + x*y - 3*y**2 - x*z - y
  Matrix size           : (216,216)
  MassAssemblingPlOptV2 CPU times : 0.002(s)
  -> Error                : 1.173244e-02
  Matrix size           : (1331,1331)
  MassAssemblingPlOptV2 CPU times : 0.009(s)
  -> Error                : 2.800865e-03
  ...
  Matrix size           : (132651,132651)
  MassAssemblingPlOptV2 CPU times : 1.418(s)
  -> Error                : 1.110034e-04
```

At last, this program plots the figure :

7.2 Stiffness matrix

Validation function for the assembly of the **Stiffness** matrix for P_1 -Lagrange finite element method in 3d (see *Stiffness Matrix*). Meshes of the unit cube are used.

- Test 1: Computation of the **Stiffness** Matrix using the versions base, OptV1 and OptV2 : give errors and computation times

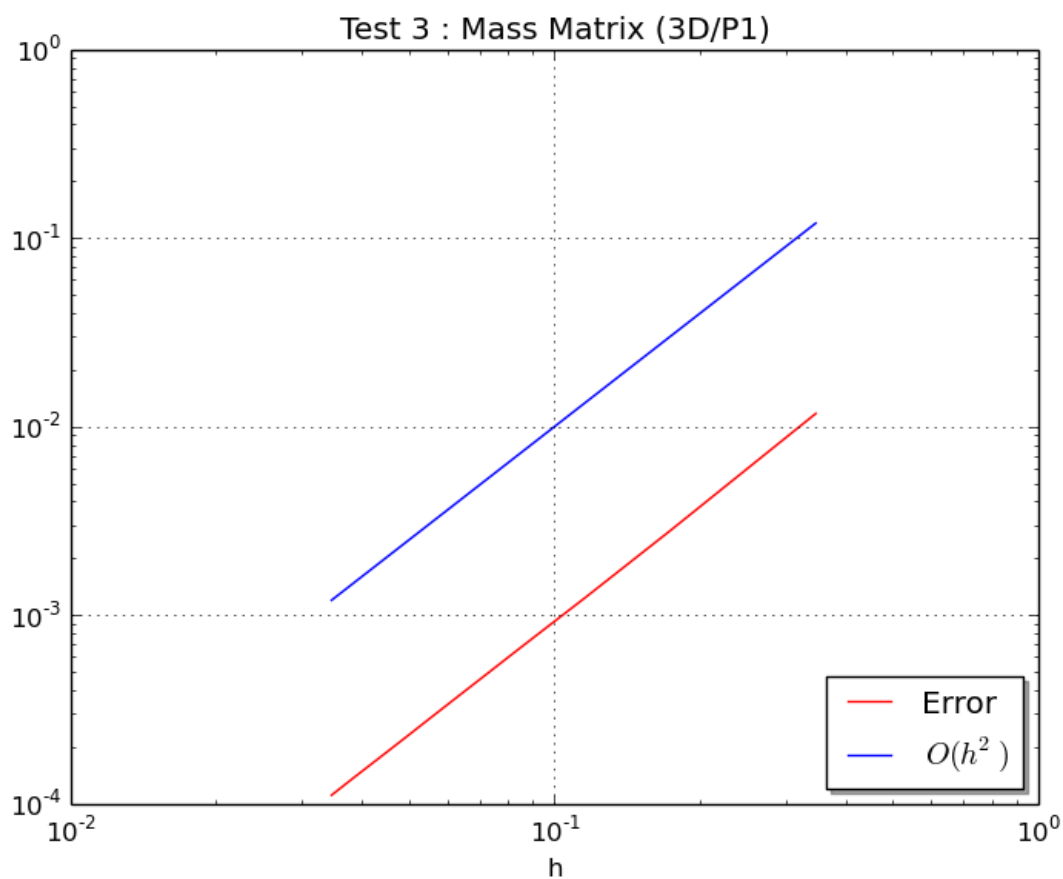


Figure 7.1: Graphical results of validMass3DP1-Test 3

- Test 2: Computation of the integral

$$\int_{\Omega_h} \nabla u(q) \cdot \nabla v(q) dq \approx \mathbf{V}^t \mathbf{M} \mathbf{U}$$

where $\mathbf{U}_i = u(q^i)$ and $\mathbf{V}_i = v(q^i)$. Functions u and v are those defined in ...

- Test 3: Ones retrieves the order 2 of P_1 -Lagrange integration

$$\left| \int_{\Omega_h} \nabla u \cdot \nabla v - \nabla \Pi_h(u) \cdot \nabla \Pi_h(v) d\Omega \right| \leq Ch^2$$

Note: sources code

```
>>> from pyOptFEM.valid3D import validStiff3DP1
>>> validStiff3DP1()
*****
*      3D Stiff Assembling P1 validations      *
*****
-----
Test 1: Matrices errors and CPU times
-----
Matrix size           : (216,216)
Error Plbase vs OptV1 : 2.220446e-15
Error Plbase vs OptV2 : 2.220446e-15
CPU times base (ref)  : 0.9563 (s)
CPU times OptV1       : 0.0566 (s) - Speed Up X16.901
CPU times OptV2       : 0.0032 (s) - Speed Up X299.656
-----
Test 1 (results): OK
-----
-----
Test 2: Validations by integration on [0,1]x[0,1]
-----
function 0 :
  u(x,y,z)=x + y + z,
  v(x,y,z)=x - y - z,
  -> Stiff error=6.217249e-15
function 1 :
  u(x,y,z)=3*x + 2*y - z - 1,
  v(x,y,z)=2*x - 2*y + 2*z + 1,
  -> Stiff error=7.771561e-15
function 2 :
  u(x,y,z)=3*x**2 - x*y + 2*y**2 + y*z - z**2 - 3,
  v(x,y,z)=2*x**2 + x*y - 3*y**2 - x*z - y,
  -> Stiff error=2.077333e-02
-----
Test 2 (results): OK
-----
-----
Test 3: Validations by order
-----
function 2 :
  u(x,y,z)=3*x**2 - x*y + 2*y**2 + y*z - z**2 - 3,
  v(x,y,z)=2*x**2 + x*y - 3*y**2 - x*z - y
```

```

Matrix size           : (216,216)
StiffAssembling3DP1OptV2 CPU times : 0.003(s)
Error                 : 2.077333e-02
Matrix size           : (1331,1331)
StiffAssembling3DP1OptV2 CPU times : 0.019(s)
Error                 : 3.330000e-03
...
Matrix size           : (132651,132651)
StiffAssembling3DP1OptV2 CPU times : 2.784(s)
Error                 : 1.828928e-04

```

At last, this program plots the figure :

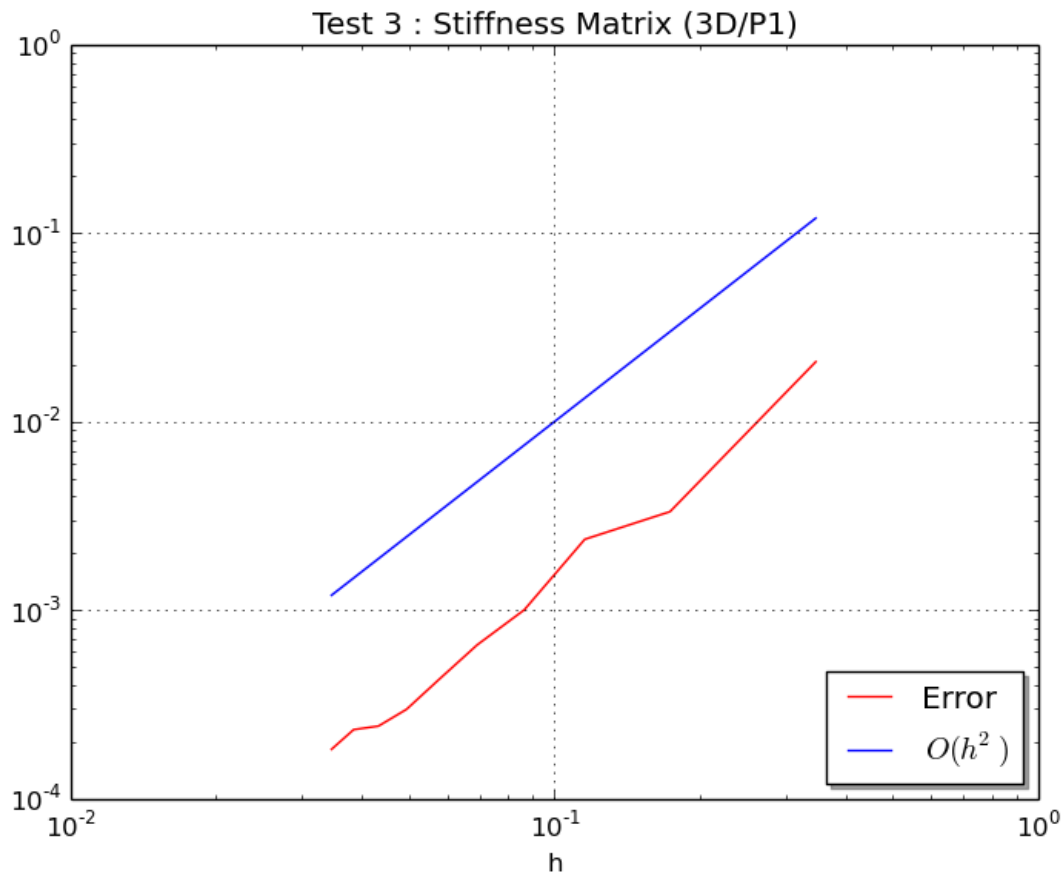


Figure 7.2: Graphical results of validStiff3DP1-Test 3

7.3 Stiffness Elasticity Matrix

Validation function for the assembly of the **Stiffness Elasticity** matrix for P_1 -Lagrange finite element method in 3d (see *Stiffness Elasticity Matrix*). Meshes of the unit cube are used.

- Test 1: Computation of the **Stiffness Elasticity** Matrix using the versions base, OptV1 and OptV2 : give errors and computation times

- Test 2: Computation of the integral

$$\int_{\Omega_h} \underline{\epsilon}^t(u) \underline{\sigma}(v) dq \approx \mathbf{V}^t \mathbb{M} \mathbf{U}$$

where $\mathbf{U}_i = u(q^i)$ and $\mathbf{V}_i = v(q^i)$. Functions u and v are those defined in ...

- Test 3: Ones retrieves the order 2 of P_1 -Lagrange integration

$$\left| \int_{\Omega_h} \underline{\epsilon}^t(u) \underline{\sigma}(v) - \underline{\epsilon}^t(\Pi_h(u)) \underline{\sigma}(\Pi_h(v)) d\Omega \right| \leq Ch^2$$

Note:

`pyOptFEM.valid3D.validStiff3DP1.validStiffElas3DP1([Num=0, la=1.5, mu=0.5])`

Parameters

- **Num** – (optional) Numbering choice.
- **la** – (optional) the first Lamé coefficient in Hooke's law, denoted by λ .
- **mu** – (optional) the second Lamé coefficient in Hooke's law, denoted by μ .

```
>>> from pyOptFEM.valid3D import validStiffElas3DP1
>>> validStiffElas3DP1()
*****
*      3D StiffElas Assembling P1 validations      *
*****
-----
Test 1: Matrices errors and CPU times
-----
Matrix size           : (648,648)
Error P1base vs OptV1 : 1.554312e-15
Error P1base vs OptV2 : 1.776357e-15
CPU times base (ref)  : 2.8850 (s)
CPU times OptV1       : 0.2925 (s) - Speed Up X9.862
CPU times OptV2       : 0.0152 (s) - Speed Up X189.919
-----
Test 1 (results): OK
-----
-----
Test 2: Validations by integration on [0,1]x[0,1]
-----
functions 0 :
  u(x,y,z)=[ 'x - 2*y', 'x + y - z', '3*x + 2*z' ],
  v(x,y,z)=[ 'x + 2*y + 4*z', '2*x - y + 4*z', '3*x - 2*y' ],
  -> StiffElas error=5.329071e-14
functions 1 :
  u(x,y,z)=[ '5*x - 2*y+z', 'x + y - 3*z', '3*x + -2*y+ 2*z' ],
  v(x,y,z)=[ '2*x - 2*y + 4*z +1', '5*x - y + 4*z', '4*x - 2*y+4' ],
  -> StiffElas error=2.131628e-14
functions 2 :
  u(x,y,z)=[ 'x**2 - 2*x*y + x*z', 'y**2 - y*z + z**2 + x', 'x**2 - x*z - y*z - z**2' ],
  v(x,y,z)=[ 'x**2 + 2*y**2 - x*z', '2*x**2 - x*y + y*z', 'x*y - y*z + z**2' ],
  -> StiffElas error=5.712000e-02
functions 3 :
```

```

u(x,y,z)=[x**2 - 2*x*y + x*z, x**3 + y**2 - y*z + z**2, -x**2*z - x*y*z + x**2 - z**2],
v(x,y,z)=[-x*z**2 + x**2 + 2*y**2, 2*x**2 - x*y + y*z, x*y - y*z + z**2],
-> StiffElas error=1.221381e-01

```

```

-----
Test 2 (results): OK
-----

```

```

-----
Test 3: Validations by order
-----

```

```

functions 3 :
  u(x,y,z)=[x**2 - 2*x*y + x*z,x**3 + y**2 - y*z + z**2,-x**2*z - x*y*z + x**2 - z**2],
  v(x,y,z)=[-x*z**2 + x**2 + 2*y**2,2*x**2 - x*y + y*z,x*y - y*z + z**2]
Matrix size                : (3993,3993)
StiffElasAssembling3DP1OptV2 CPU times : 0.121(s)
-> Error                    : 3.036230e-02
Matrix size                : (12288,12288)
StiffElasAssembling3DP1OptV2 CPU times : 0.422(s)
-> Error                    : 1.515389e-02
Matrix size                : (27783,27783)
StiffElasAssembling3DP1OptV2 CPU times : 0.999(s)
-> Error                    : 8.314471e-03
Matrix size                : (52728,52728)
StiffElasAssembling3DP1OptV2 CPU times : 2.019(s)
-> Error                    : 5.618296e-03
Matrix size                : (89373,89373)
StiffElasAssembling3DP1OptV2 CPU times : 3.528(s)
-> Error                    : 3.666314e-03
Matrix size                : (139968,139968)
StiffElasAssembling3DP1OptV2 CPU times : 5.668(s)
-> Error                    : 2.932322e-03

```

At last, this program plots the figure :

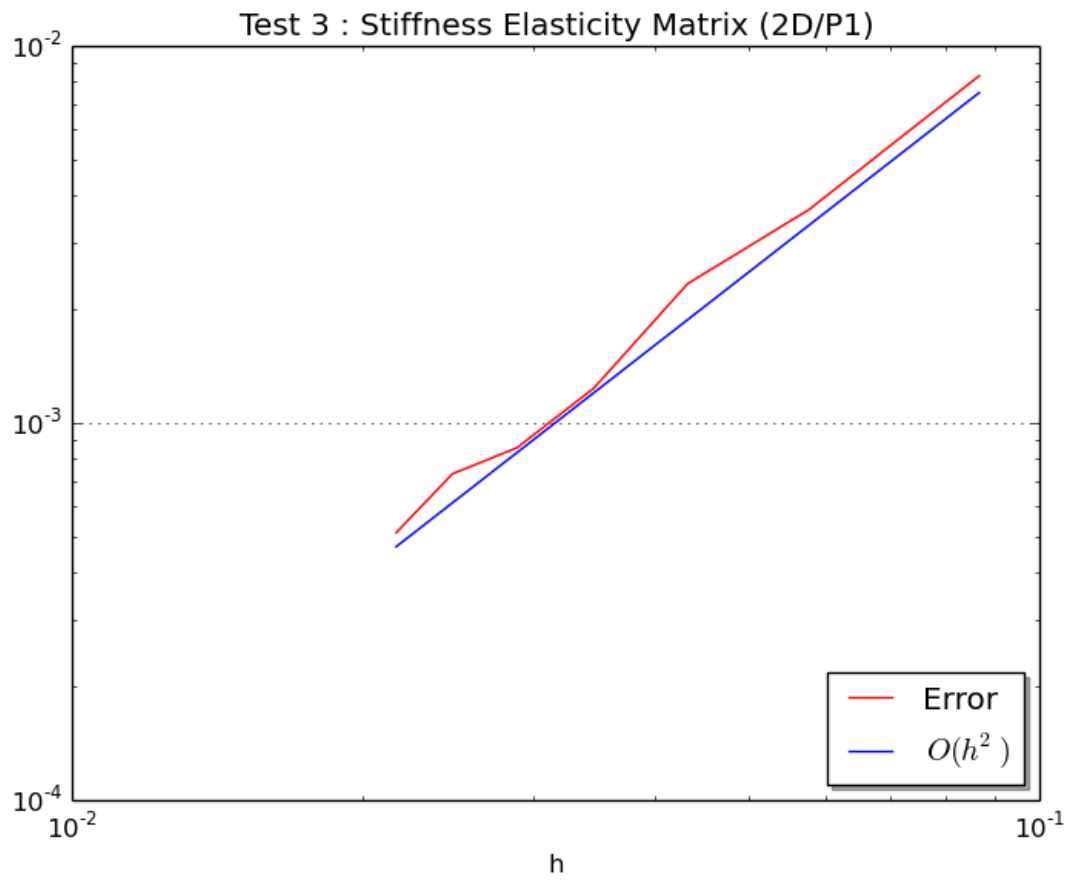


Figure 7.3: Graphical results of validStiffElas3DP1-Test 3

QUICK TESTING

To test the **pyOptFEM** library, you can run validation tests `runValids()` or some benchmarks (see `runBenchs()`)

TESTING AND WORKING

- Ubuntu 12.04 LTS (x86_64) with
 - python3.3
 - python3.2
- Works on Windows 7 64 bits (???)

REQUIREMENTS

pyOptFEM works with python3.3.

How to install python3.3.2?

A description of how to compile/install python3.3 under Ubuntu 12.04 LTS (x86_64) is given on [François Cuvelier's website](#), (section Python in the left menu) and repeated here.

Note: How to install python3.3.2

```
wget http://www.python.org/ftp/python/3.3.2/Python-3.3.2.tar.bz2
tar jxvf ./Python-3.3.2.tar.bz2
cd Python-3.3.2
./configure --prefix=/opt/python3.3.2
make
sudo make install
```

As a result, python is installed in /opt/python3.3.2 directory.

For **pyOptFEM**, you need some python modules. To install them you need easy_install which can be installed like this.

Note: How to install setuptools module

```
wget --check-certificate https://pypi.python.org/packages/source/s/setuptools/setuptools-1.1.4.tar.gz
tar zxvf setuptools-1.1.4.tar.gz
cd setuptools-1.1.4
sudo /opt/python3.3.2/bin/python3 setup.py install
```

For **pyOptFEM**, you need numpy, scipy, sympy and matplotlib. (For matplotlib, the package libfreetype6-dev may be necessary!)

Note: How to install scientific computation modules : numpy, scipy, sympy, matplotlib

```
sudo /opt/python3.3.2/bin/easy_install numpy
sudo /opt/python3.3.2/bin/easy_install scipy
sudo /opt/python3.3.2/bin/easy_install sympy
sudo /opt/python3.3.2/bin/easy_install matplotlib
```

INSTALLATION

Note: To install **pyOptFEM** as root, you should run the following command:

```
/opt/python3.3.2/bin/python3 setup.py install
```

Note: To install **pyOptFEM** as a single user, you should run the following command:

```
/opt/python3.3.2/bin/python3 setup.py install --user
```

LICENSE ISSUES

pyOptFEM is published under the terms of the [GNU General Public License](#).

pyOptFEM is free software: you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation, either version 3 of the License, or (at your option) any later version.

pyOptFEM is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program. If not, see <http://www.gnu.org/licenses/>.

Software using source files of this project or significant parts of it, should include the following attribution notice:

ATTRIBUTION NOTICE: This product includes software developed for the **pyOptFEM** project at (C) University Paris XIII, Galilee Institute, LAGA, France.

pyOptFEM is a python software package for P_1 -Lagrange Finite Element Methods in 3D. The project is maintained by F. Cuvelier, C. Japhet and G. Scarella. For Online Documentation and Download we refer to

<http://www.math.univ-paris13.fr/~cuvelier>

INDICES AND TABLES

- *genindex*
- *modindex*
- *search*

p

`pyOptFEM.FEM2D.assemblyBench`, [15](#)
`pyOptFEM.FEM2D.mesh`, [55](#)
`pyOptFEM.FEM3D.assemblyBench`, [27](#)
`pyOptFEM.FEM3D.elemMatrix`, [69](#)
`pyOptFEM.FEM3D.mesh`, [75](#)
`pyOptFEM.valid2D.validMass2DP1`, [77](#)

C

CubeMesh (class in pyOptFEM.FEM3D.mesh), [75](#)

E

ElemStiffElasMatBa3DP1() (in module pyOptFEM.FEM3D.elemMatrix), [68](#)

ElemStiffElasMatBb3DP1() (in module pyOptFEM.FEM3D.elemMatrix), [69](#)

G

getMesh (class in pyOptFEM.FEM2D.mesh), [55](#)

getMesh (class in pyOptFEM.FEM3D.mesh), [76](#)

P

pyOptFEM.FEM2D.assemblyBench (module), [15](#)

pyOptFEM.FEM2D.mesh (module), [55](#)

pyOptFEM.FEM3D.assemblyBench (module), [27](#)

pyOptFEM.FEM3D.elemMatrix (module), [68](#), [69](#)

pyOptFEM.FEM3D.mesh (module), [75](#)

pyOptFEM.valid2D.validMass2DP1 (module), [77](#)

S

SquareMesh (class in pyOptFEM.FEM2D.mesh), [55](#)

V

validMass2DP1() (in module pyOptFEM.valid2D.validMass2DP1), [77](#)

validStiffElas2DP1() (in module pyOptFEM.valid2D.validStiff2DP1), [82](#)

validStiffElas3DP1() (in module pyOptFEM.valid3D.validStiff3DP1), [90](#)